



R0HS-COMPLIANT



LTR	REV.	DESCRIPTION	DATE
	B	ECN # 051024-6 ADD ROHS	10/24/05'

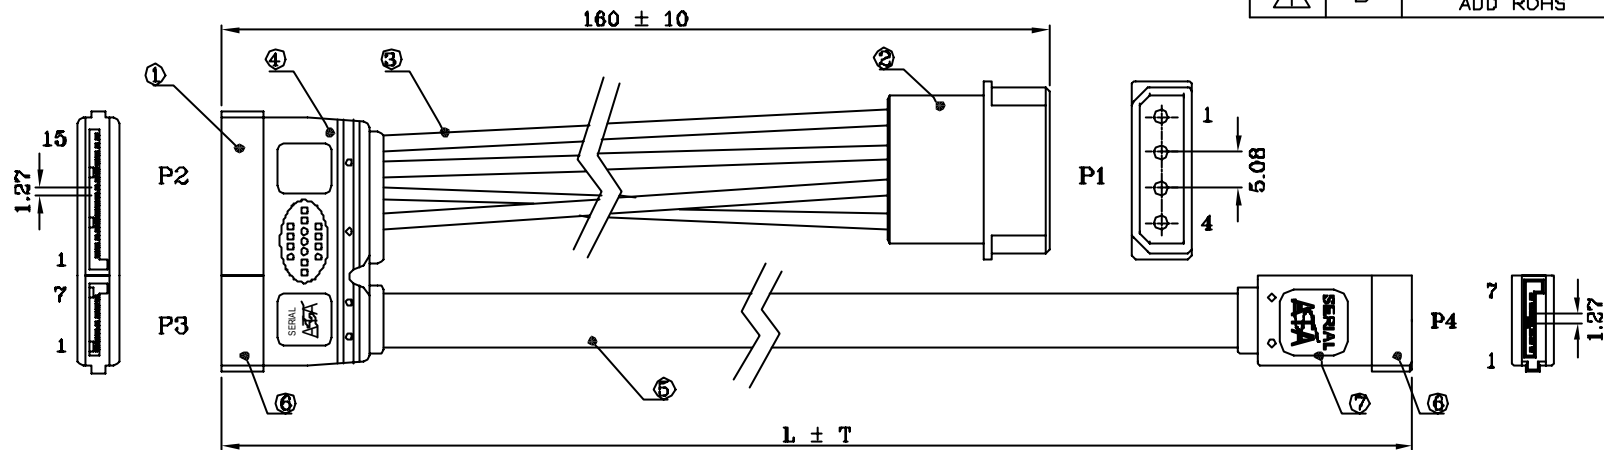

WIRE CONNECTION:

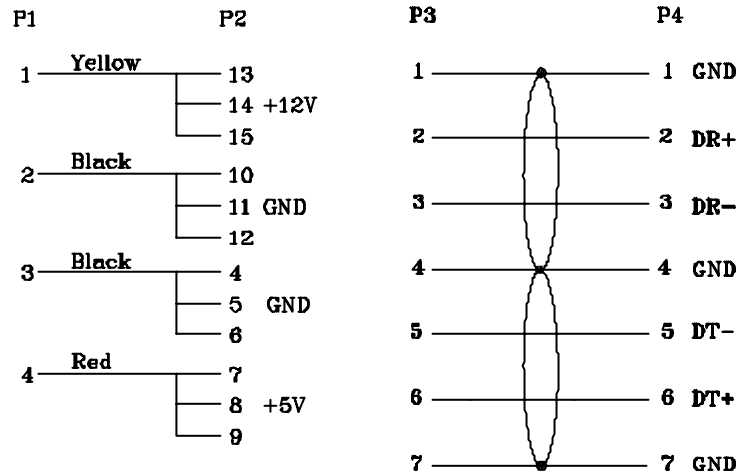

- 100% OPEN / SHORT / INSULATION TEST
- INSULATION TEST: 2MΩ
- PACKING: SEE P-0039 REV.C PACKING DRAWING
(BINDING SIZE MUST BE SMALLER THAN BLISTER)

150-0460-3	AK-SATA-SP-100	1000	20	4016032154280	DB VP2
150-0460-2	AK-SATA-SP-075	750	20	4016032154273	DB VP2
150-0460-1	AK-SATA-SP-050	500	20	4016032154266	DB VP2
DWG	P/N	L (mm)	T (mm)	EAN CODE	BLISTER

COMPONENTS	DESCRIPTION	Q'TY
1 SATA15F	Insulator :SPS UL94V-0 ,Black , Contact : Phosphor Bronze	1
2 Power Plug	4P Male	1
3 Wire	UL1007 18AWG (Color: BLACK X2 ,YELLOW X1 , RED X1) L: 140mm	4
4 HOOD	PVC 45P Molded Color: Black(NK-K01)	1
5 CABLE (LIAN FENG)	S-ATA CABLE, UL2725[26AWG(1/0.404)*2F+AL/MY+DW(1/0.32)*2]TIN Red (PANTONE 200C)COLOR,PVC JACKET:2.2*7.8mm, Insulator:FOAM-PE	1
6 SATA07F	Insulator:SPS UL94V-0,Black,Contact:Phosphor Bronze GOLD PLATED 15u"	2
7 HOOD	PVC 45P Molded Color: Black(NK-K01)	1

Tolerance Inch M/M					
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
Draw	FANNIE 10/24/05'				
Check					
Engr					
ASSMANN Electronics, Inc.					
Title SERIAL ATA SIGNAL & POWER CABLE					
AK-SATA-SP-xxx					
App'd					
Scale NONE Units m/m Third Angle Projection					
Dwg No. 150-0460 REV:B Sheet 1/1					