

1

2

3

4

A

B

C

D


A

B

C


D

DB25 Male




23

L

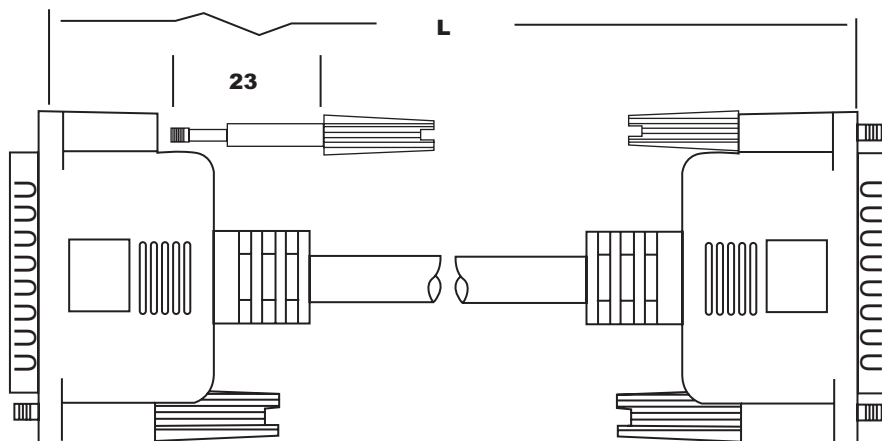

DB25 Male

**Material:**

- 1.Cable: UL 20276 #28 18P+1(#26)+AL/MY+85%Braid O.D:7.5
- 2.Connector:DB25M, Blue
- 3.Thumbscrew: #4-40UNC, E23
- 4.Copper Tape: 30X95

Notes:

- 1.Total Length: L
- 2.Color: Beige
- 3.Molded Type
- 4.360°Solder

Description

Name :

AK736-1.8-R

DB25 Male-DB25 Male


ASSMANN
Electronic Components

RoHS
Compliant

Configuration:

DB25M

DB25M

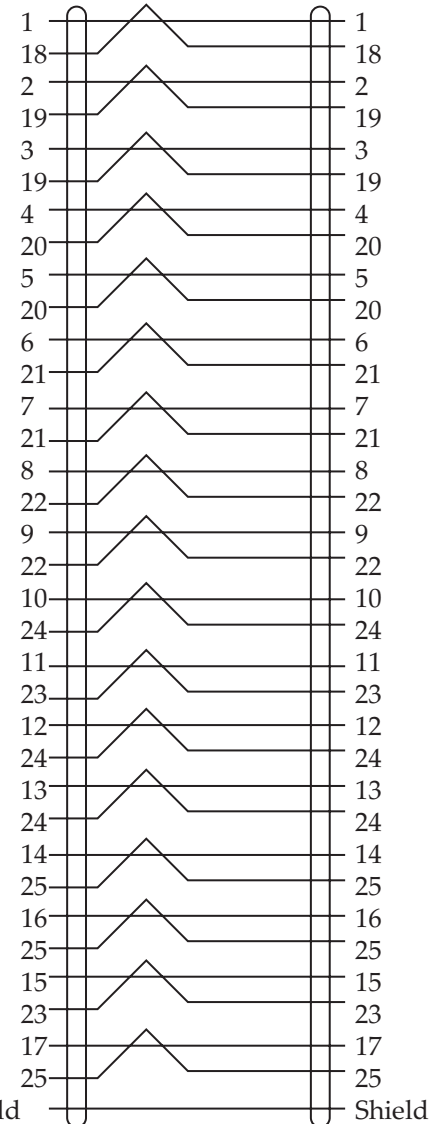

Shield

Shield

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4