

AN6545, AN6545SP

Low Power Loss Voltage Regulators



Overview

The AN6545 and AN6545SP are the voltage regulators with strobe pin which can turn on/off an output.


A rated load current is 150mA and an output voltage is fixed at 5V.

Features

- 150mA rated load current and 5V fixed output voltage
- Capable of turning off an output by setting the strobe pin to the "L" level
- Minimum input/output voltage difference: typ. 0.25V
- Built-in overcurrent protective circuit
- TO-126 (4-lead) package for the AN6545, and surface-mount type 5-pin SIL plastic package for the AN6545SP

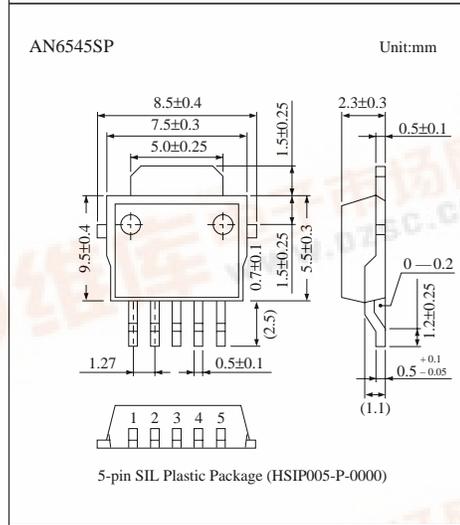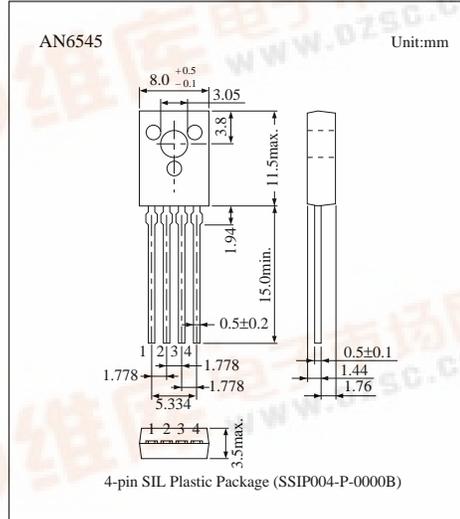

Block Diagram

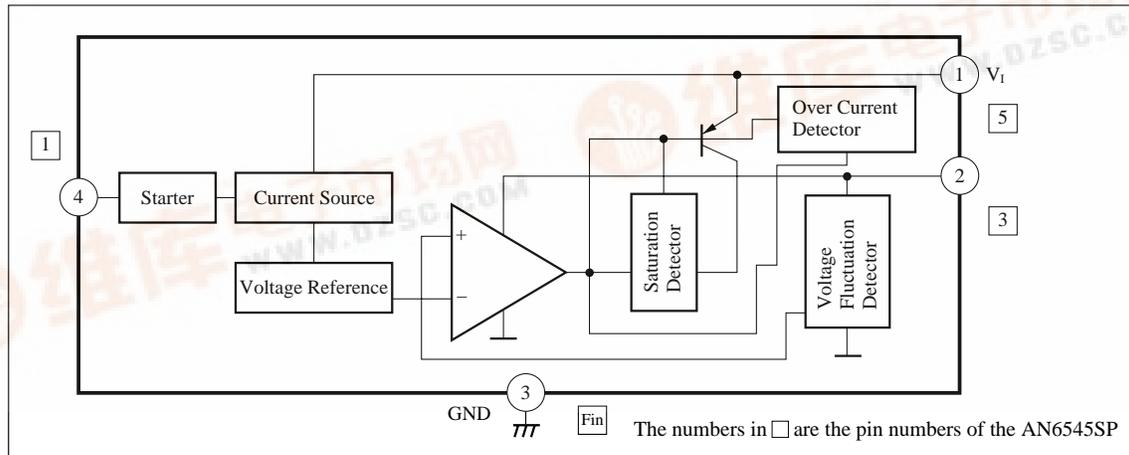

■ Absolute Maximum Ratings (Ta=25°C)


| Parameter | Symbol | Rating | Unit |
|-------------------------------|-----------|------------|------|
| Supply voltage | V_I | 14.4 | V |
| Power dissipation | AN6545 | 1300 * | mW |
| | AN6545SP | 500 | mW |
| Operating ambient temperature | T_{opr} | -20 to+75 | °C |
| Storage temperature | AN6545 | -55 to+150 | °C |
| | AN6545SP | -55 to+125 | °C |

* Mounted onto the PCB

■ Electrical Characteristics (Ta=25°C)

| Parameter | Symbol | Condition | min | typ | max | Unit |
|---|--------------------|--|-----|-----|-----|---------|
| Output voltage | V_O | $V_I=12V, I_O=150mA$ | 4.8 | 5 | 5.2 | V |
| Output voltage range | V_t | $V_I=6 \text{ to } 14.4V, I_O=0 \text{ to } 150mA$ | 4.7 | 5 | 5.3 | V |
| Bias current | I_{bias} | $V_I=12V, I_O=0mA$ | — | 2.9 | 4 | mA |
| Load regulation | REG_L | $V_I=12V, I_O=0 \text{ to } 150mA$ | — | — | 100 | mV |
| Line regulation | REG_{IN} | $V_I=6 \text{ to } 14V, I_O=150mA$ | — | — | 100 | mV |
| Minimum input/output voltage difference | $V_{DIF(min)}$ | $V_I=4.5V, I_O=150mA$ | — | — | 5 | V |
| Rush current | I_{rush} | $V_I=4.5V, I_O=0mA$ | — | 2.5 | — | mA |
| Output short-circuit current | $I_{O(short)}$ | $V_I=12V$ | 350 | — | 550 | mA |
| Load bias current change | ΔI_{biasl} | $V_I=12V, I_O=0 \text{ to } 150mA$ | — | — | 10 | mA |
| Off-state cathode current | I_{OFF} | $V_I=12V, V_S=0V$ | — | — | 2 | μA |
| Strobe pin input current | I_S | $V_I=12V, V_S=2.5V$ | — | — | 200 | μA |
| Strobe pin threshold voltage | $V_{S(TH)}$ | $V_I=12V$ | 0.8 | 2 | 2.4 | V |
| Ripple rejection ratio | RR | $V_I=10 \text{ to } 14V, I_O=150mA, f=120kHz$ | — | 55 | — | dB |

■ Application Circuit

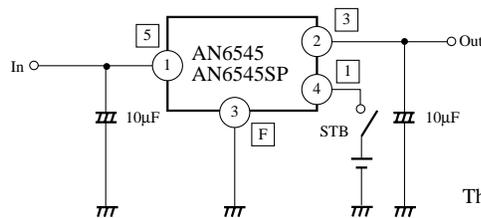

The number in □ are the pin numbers of the AN6545SP

- When using at a low temperature, it is recommended to use capacitors with low internal impedance (for example, tantalum capacitors) for output capacitors.

■ Characteristics Curve

