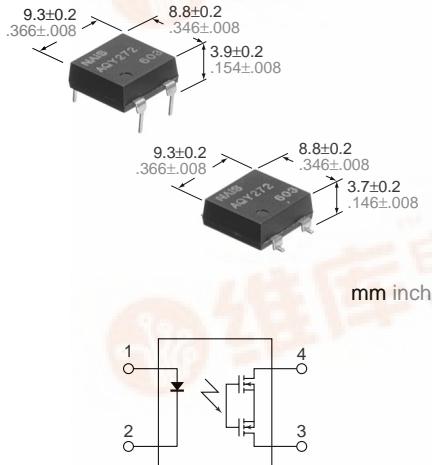


NAiS

PD Type  
1-channel (Form A) TypePhotoMOS  
RELAYS

## FEATURES

**1. Flat-Packaged Type (W) 8.8×(D) 9.3×(H) 3.9mm (W) .346×(D) .366×(H) .154inch**

**2. High capacity**

Supports the various types of load control, from very small loads to a maximum 2A at the rated load voltage 60V (AQY272)

**3. High sensitivity**

• Low ON resistance  
A maximum 2A load can be controlled with a 5mA input current. The ON resistance is low at 0.11Ω (AQY272)

## TYPICAL APPLICATIONS

- Measuring and Testing equipment
- IC Testers and Board Testers
- High speed inspection machines

## TYPES

Type	Output rating*		Part No.			Packing quantity	
	Load voltage	Load current	Through hole terminal	Surface-mount terminal			
			Tube packing style		Tape and reel packing style	Tube	Tape and reel
AC/DC	60V	2.0A	AQY272	AQY272A	AQY272AX	AQY272AZ	1 tube contains 50 pcs. 1 batch contains 1,000 pcs.
	100V	1.3A	AQY275	AQY275A	AQY275AX	AQY275AZ	
	200V	0.65A	AQY277	AQY277A	AQY277AX	AQY277AZ	
	400V	0.35A	AQY274	AQY274A	AQY274AX	AQY274AZ	

\* Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY272	AQY275	AQY277	AQY274	Remarks	
Input	LED forward current	I <sub>F</sub>	50 mA				f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	V <sub>R</sub>	3 V					
	Peak forward current	I <sub>FP</sub>	1 A					
	Power dissipation	P <sub>in</sub>	75 mW					
Output	Load voltage (peak AC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	100ms (1 shot), V <sub>L</sub> = DC	
	Continuous load current (Peak AC)	I <sub>L</sub>	2.0 A	1.3 A	0.65 A	0.35 A		
	Peak load current	I <sub>peak</sub>	6.0 A	4.0 A	2.0 A	1.0 A		
	Power dissipation	P <sub>out</sub>	700 mW					
Total power dissipation		P <sub>T</sub>	750 mW					
I/O isolation voltage		V <sub>iso</sub>	2,500 V AC					
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F		Non-condensing at low temperatures			
	Storage	T <sub>stg</sub>	−40°C to +100°C −40°F to +212°F					


## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQY272	AQY275	AQY277	AQY274	Condition	
Input	LED operate current	Typical	I <sub>Fon</sub>	1.0 mA			$I_F = 100 \text{ mA}$		
		Maximum		3.0 mA			$V_L = 10 \text{ V}$		
Input	LED turn off current	Minimum	I <sub>Foff</sub>	0.4 mA			$I_F = 100 \text{ mA}$		
		Typical		0.9 mA			$V_L = 10 \text{ V}$		
Input	LED dropout voltage	Typical	V <sub>F</sub>	1.16 V (1.25 V at $I_F = 50 \text{ mA}$ )			$I_F = 10 \text{ mA}$		
		Maximum		1.5 V					
Output	On resistance	Typical	R <sub>on</sub>	0.11 Ω	0.23 Ω	0.7 Ω	2.1 Ω	$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time	
		Maximum		0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω		
Output	Off state leakage current	Maximum	I <sub>Leak</sub>	10 μA			$I_F = 0$ $V_L = \text{Max.}$		
				2.46 ms	2.40 ms	2.40 ms	1.65 ms	$I_F = 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$	
Transfer characteristics	Turn on time*	Typical	T <sub>on</sub>	5.0 ms					
		Maximum		5.64 ms	5.65 ms	2.57 ms	3.88 ms	$I_F = 5 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$	
		Typical	T <sub>off</sub>	10.0 ms					
		Maximum		0.22 ms	0.21 ms	0.10 ms	0.08 ms	$I_F = 5 \text{ mA or } 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$	
Transfer characteristics	Turn off time*	Typical	C <sub>iso</sub>	3.0 ms					
		Maximum		0.8 pF			$f = 1 \text{ MHz}$ $V_B = 0$		
Transfer characteristics	I/O capacitance	Typical	R <sub>iso</sub>	1.5 pF					
		Maximum		1,000 MΩ			500 V DC		
Transfer characteristics	Initial I/O isolation resistance	Minimum	—	0.5 cps	0.5 cps	0.5 cps	0.5 cps	$I_F = 10 \text{ mA}$ Duty factor = 50% $I_L = \text{Max.}$ , $V_L = \text{Max.}$	
		Maximum							

Note: Recommendable LED forward current  $I_F = 5$  to 10 mA.

\*Turn on/Turn off time


For type of connection, see page 31.

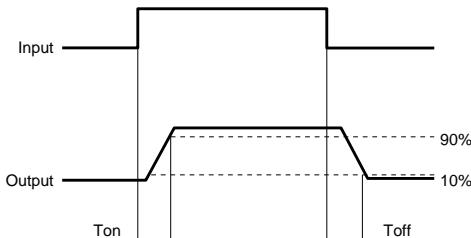


- For Dimensions, see Page 29.
- For Schematic and Wiring Diagrams, see Page 31.
- For Cautions for Use, see Page 36.

## REFERENCE DATA


## 1. Load current vs. ambient temperature characteristics

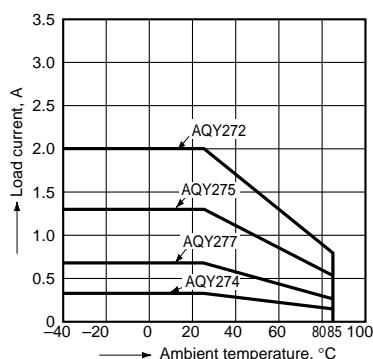Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

## 2-(1) On resistance vs. ambient temperature characteristics

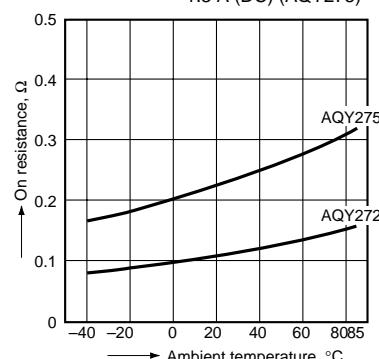LED current: 10 mA;  
Continuous load current: 2.0 A (DC) (AQY272),  
1.3 A (DC) (AQY275)


## 2-(2) On resistance vs. ambient temperature characteristics

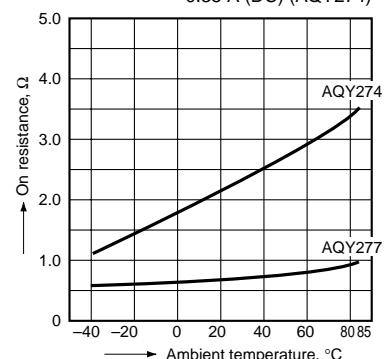LED current: 10 mA;  
Continuous load current: 0.65 A (DC) (AQY277),  
0.35 A (DC) (AQY274)

# AQY27O


## 3. Turn on time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

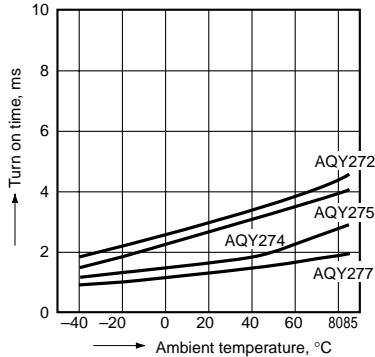


## 4. Turn off time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

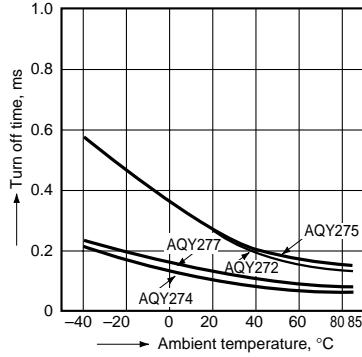


## 5. LED operate vs. ambient temperature characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

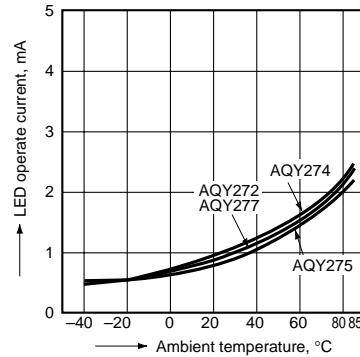


## 6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

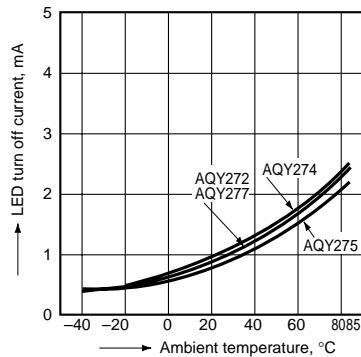


## 7. LED dropout voltage vs. ambient temperature characteristics

Sample: all types; LED current: 5 to 50 mA

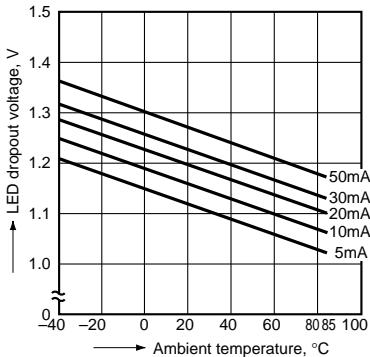


## 8. Voltage vs. current characteristics of output at MOS portion

Ambient temperature: 25°C 77°F




## 9.-(1) Off state leakage current

Ambient temperature: 25°C 77°F

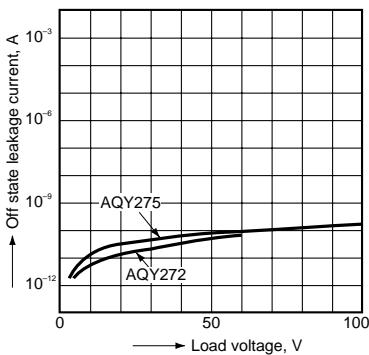


## 9.-(2) Off state leakage current

Ambient temperature: 25°C 77°F

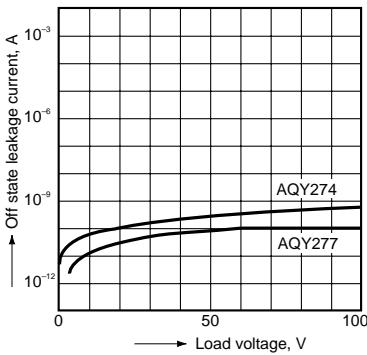


## 10. LED forward current vs. turn on time characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

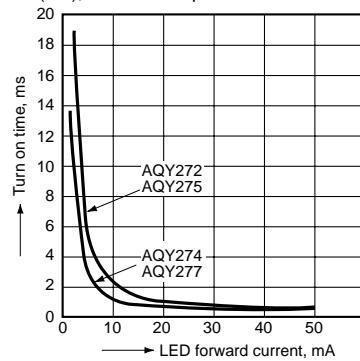


## 11. LED forward current vs. turn off time characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

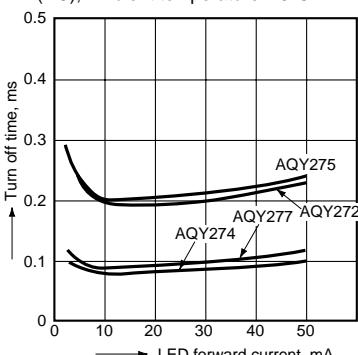


## 12.- (1) Load voltage vs. turn on time characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

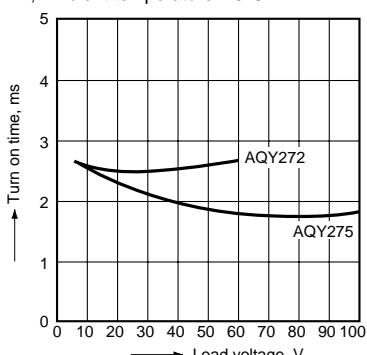


## 12.- (2) Load voltage vs. turn on time characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

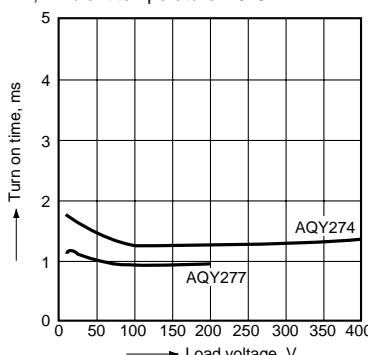


**13.-(1) Load current vs. turn on time characteristics**

LED current: 10 mA; Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

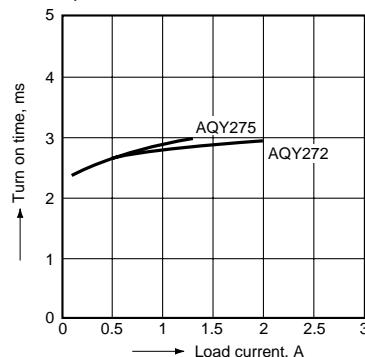


**13.- (2) Load current vs. turn on time characteristics**

LED current: 10 mA; Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

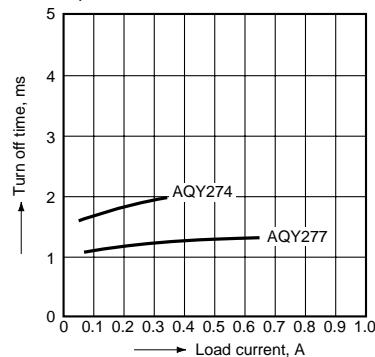


**14.- (1) Load voltage vs. turn off time characteristics**

LED current: 10 mA; Continuous load current:  
100 mA; Ambient temperature: 25°C 77°F

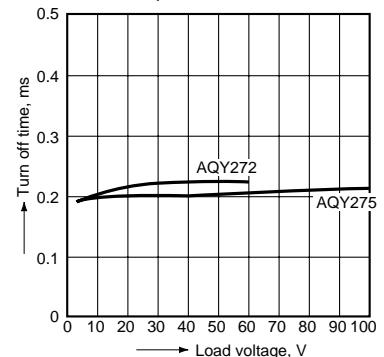


**14.- (2) Load voltage vs. turn off time characteristics**

LED current: 10 mA; Continuous load current:  
100 mA; Ambient temperature: 25°C 77°F

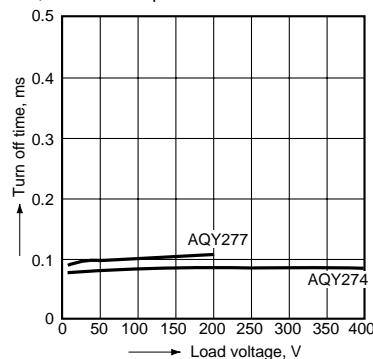


**15.- (1) Load current vs. turn off time characteristics**

LED current: 10 mA; Load voltage 10 V (DC);  
Ambient temperature: 25°C 77°F

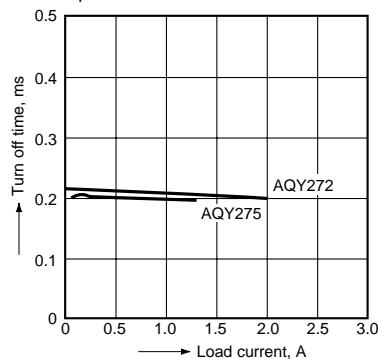


**15.- (2) Load current vs. turn off time characteristics**

LED current: 10 mA; Load voltage 10 V (DC);  
Ambient temperature: 25°C 77°F

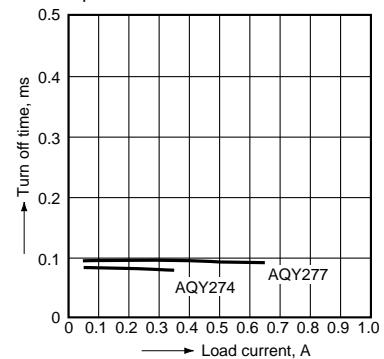

**16. Maximum operating frequency vs. load voltage/current characteristics**

LED current: 10 mA;  
Ambient temperature: 25°C 77°F

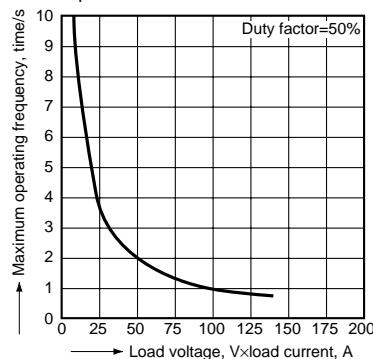

**17. Applied voltage vs. output capacitance characteristics**

Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

