

 POSEICO POSEICO SPA POwer SEmiconductors Italian COporation	POSEICO SPA Via N. Lorenzi 8, 16152 Genova - ITALY Tel. ++ 39 010 6556234 - Fax ++ 39 010 6557519 Sales Office: Tel. ++ 39 010 6556775 - Fax ++ 39 010 6442510
---	---

RECTIFIER DIODE	AR1101 Repetitive voltage up to 1000 V Mean forward current 2250 A Surge current 28 kA FINAL SPECIFICATION ago 02 - ISSUE : 05
-------------------------------	---

Symbol	Characteristic	Conditions	T _J [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		175	1000	V
V _{RSM}	Non-repetitive peak reverse voltage		175	1100	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	175	50	mA
CONDUCTING					
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Th=55°C, double side cooled		2250	A
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Tc=85°C, double side cooled		2130	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	175	28	kA
I ² t	I ² t			3920 x 1E3	A ² s
V _{FM}	Forward voltage	Forward current = 1800 A	25	1.07	V
V _{F(TO)}	Threshold voltage		175	0.75	V
r _F	Forward slope resistance		175	0.125	mohm
SWITCHING					
t _{rr}	Reverse recovery time		175		μs
Q _{rr}	Reverse recovery charge				μC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		37	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		7	°C/kW
T _j	Operating junction temperature			-30 / 175	°C
F	Mounting force			11.8 / 13.2	kN
	Mass			300	g

ORDERING INFORMATION : AR1101 S 10

 standard specification ☐ ☒ VRRM/100


AR1101 RECTIFIER DIODE




FINAL SPECIFICATION ago 02 - ISSUE : 05


DISSIPATION CHARACTERISTICS

SQUARE WAVE

Th [°C]

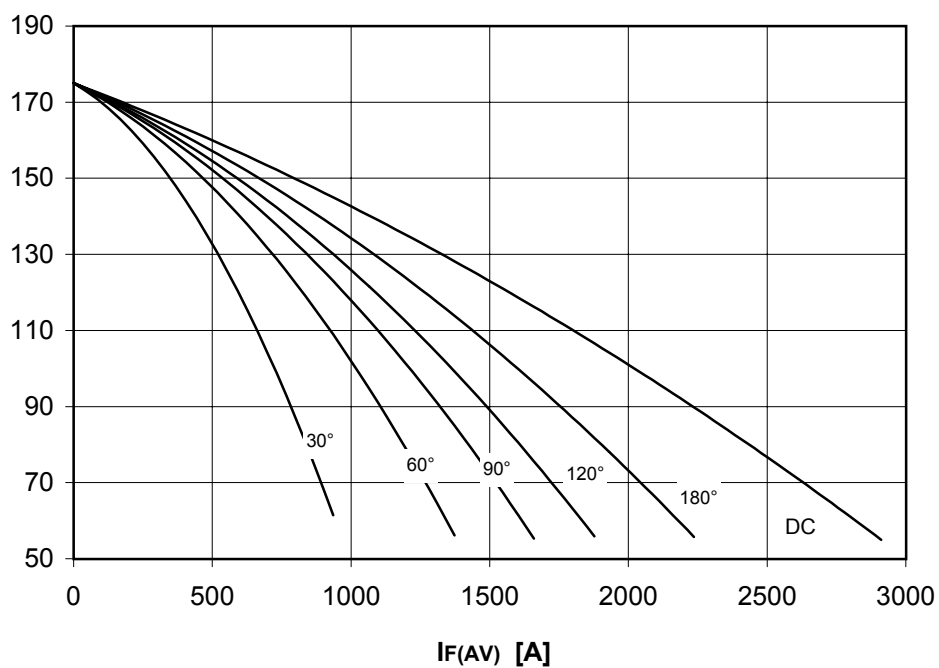

PF(AV) [W]

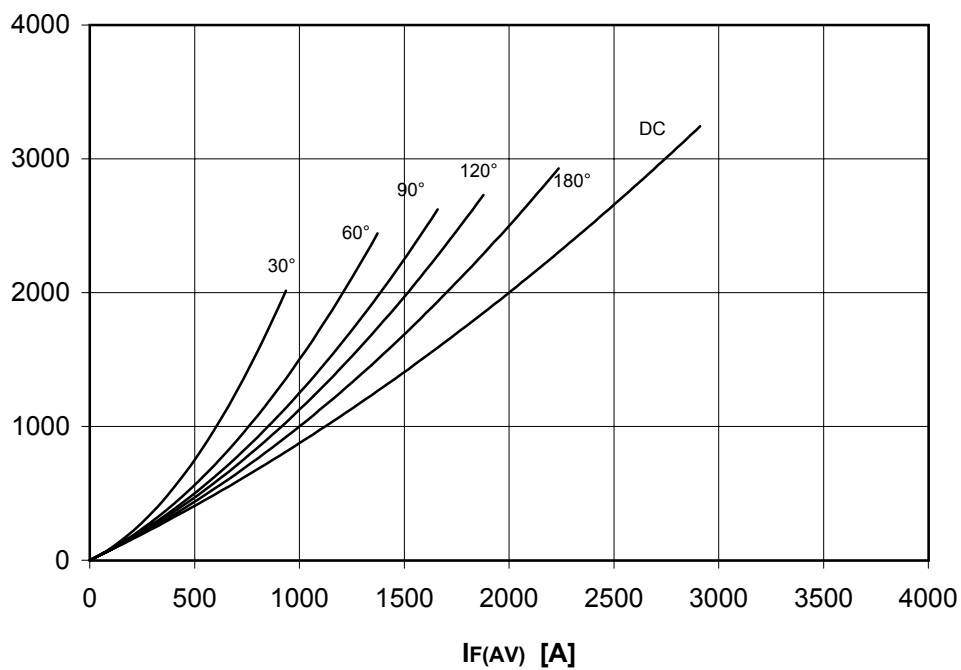



AR1101 RECTIFIER DIODE



FINAL SPECIFICATION ago 02 - ISSUE : 05

DISSIPATION CHARACTERISTICS

SINE WAVE

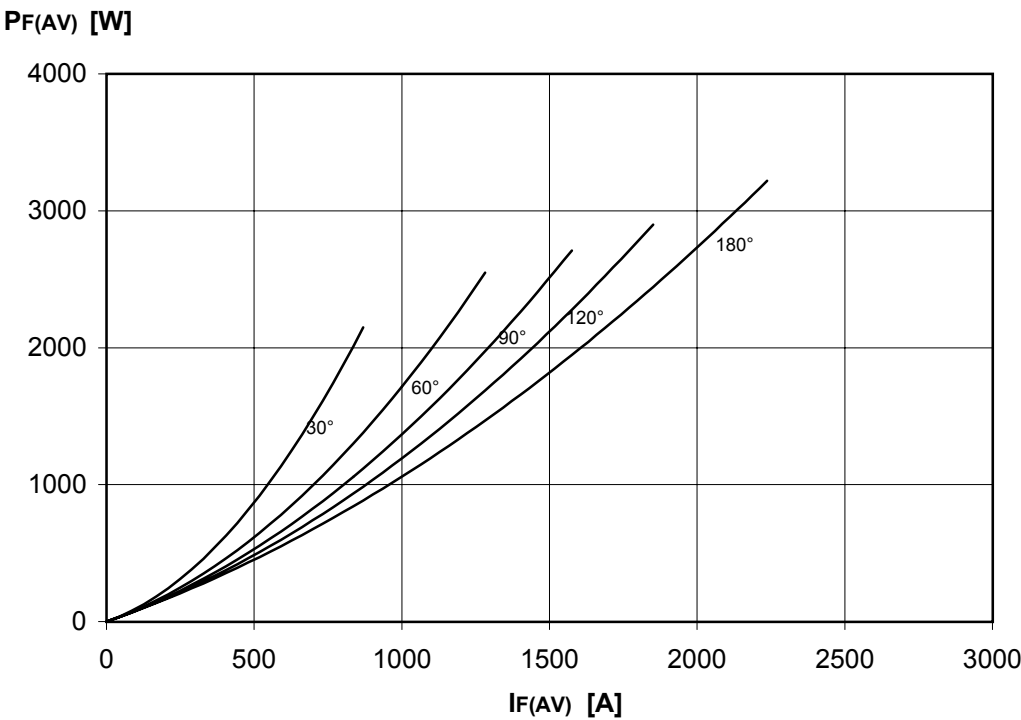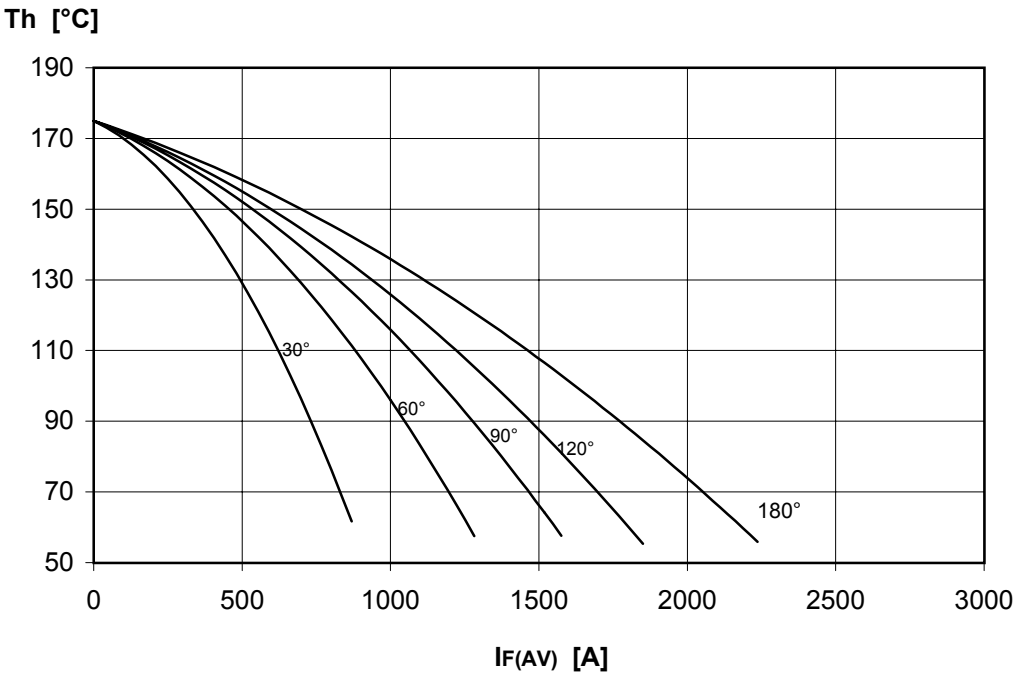


AR1101 RECTIFIER DIODE




FINAL SPECIFICATION ago 02 - ISSUE : 05



FORWARD CHARACTERISTIC
 $T_J = 175^\circ\text{C}$

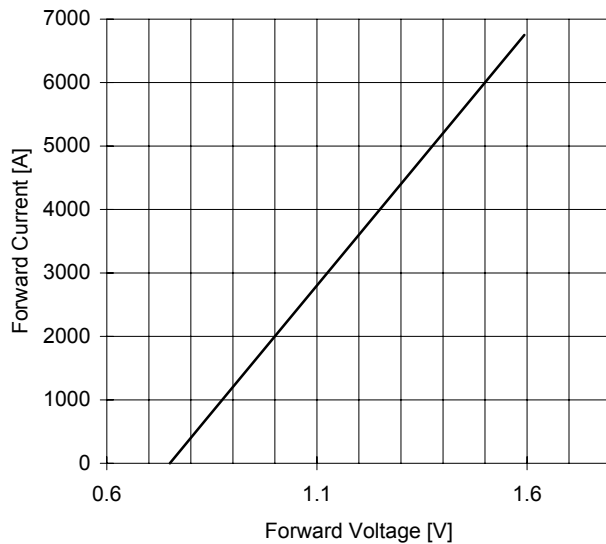


SURGE CHARACTERISTIC
 $T_J = 175^\circ\text{C}$

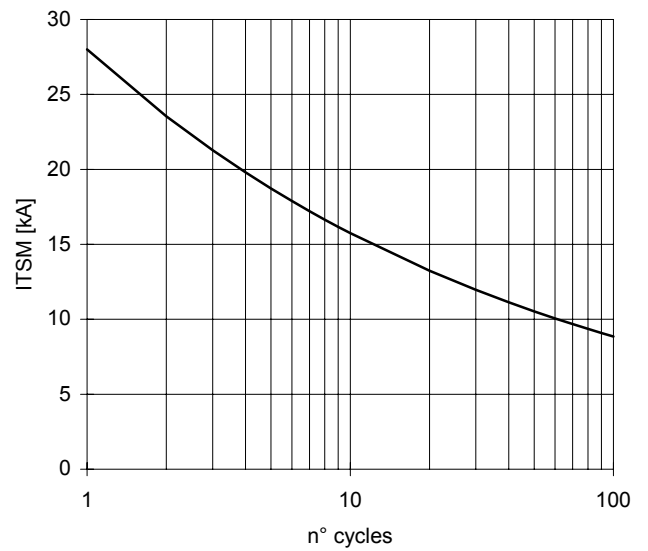

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

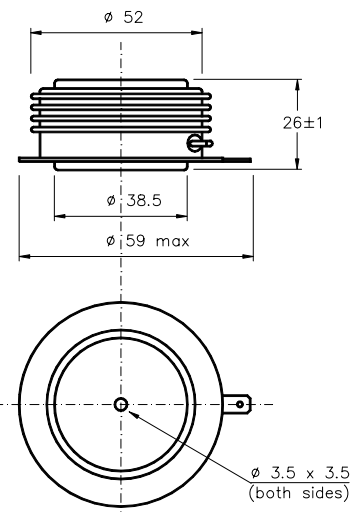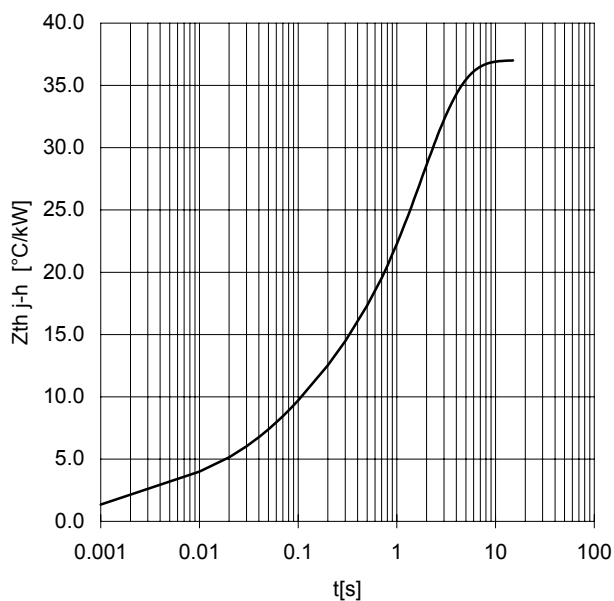

Dimensions
in mm



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness $< 0.03 \text{ mm}$ and roughness $< 2 \mu\text{m}$.

In the interest of product improvement POSEICO reserves the right to change any data given in this data sheet at any time without previous notice.

If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

