

RECTIFIER DIODE

AR1104

Repetitive voltage up to **2900 V**
 Mean forward current **1680 A**
 Surge current **17.9 kA**

FINAL SPECIFICATION
 mag 02 - ISSUE : 05

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		175	2900	V
V _{RSM}	Non-repetitive peak reverse voltage		175	3000	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	175	50	mA
CONDUCTING					
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Th=55°C, double side cooled		1680	A
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Tc=85°C, double side cooled		1600	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	175	17.9	kA
I ² t	I ² t			1602 x 1E3	A²s
V _{FM}	Forward voltage	Forward current = 1800 A	25	1.30	V
V _{F(TO)}	Threshold voltage		175	0.85	V
r _F	Forward slope resistance		175	0.260	mohm
SWITCHING					
t _{rr}	Reverse recovery time		175		μs
Q _{rr}	Reverse recovery charge				μC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		37	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		7	°C/kW
T _j	Operating junction temperature			-30 / 175	°C
F	Mounting force			11.8 / 13.2	kN
	Mass			300	g

AR1104 RECTIFIER DIODE




FINAL SPECIFICATION mag 02 - ISSUE : 05


DISSIPATION CHARACTERISTICS

SQUARE WAVE

T_h [°C]

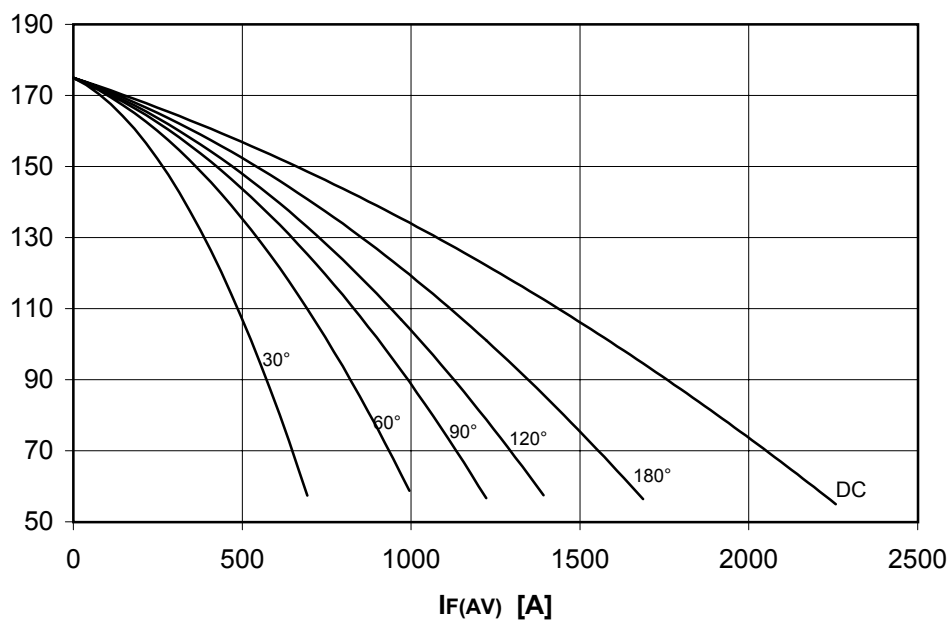

$P_F(AV)$ [W]

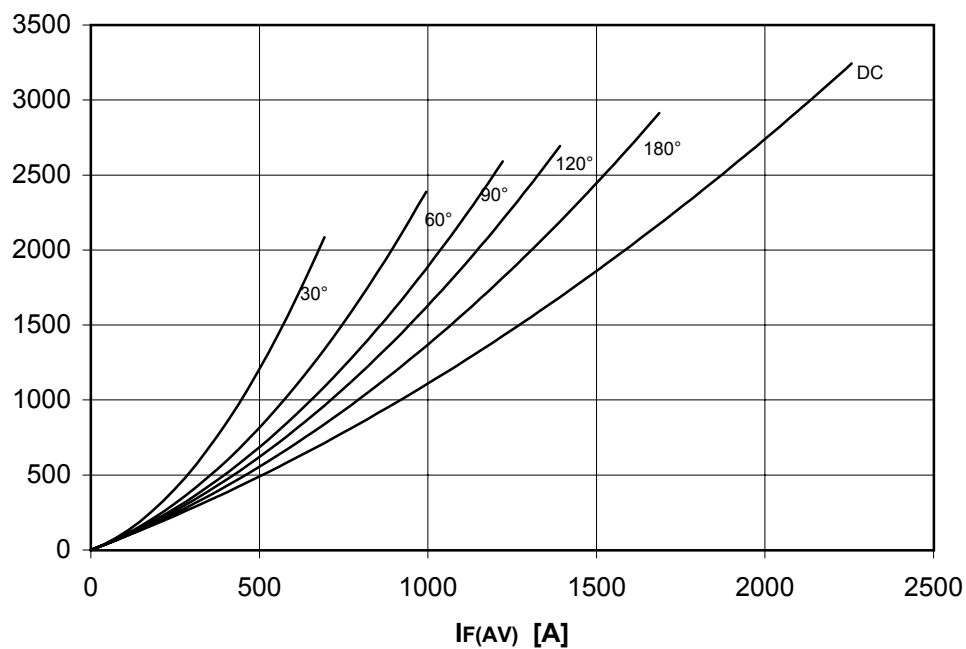

AR1104 RECTIFIER DIODE




FINAL SPECIFICATION mag 02 - ISSUE : 05


DISSIPATION CHARACTERISTICS

SINE WAVE

T_h [°C]

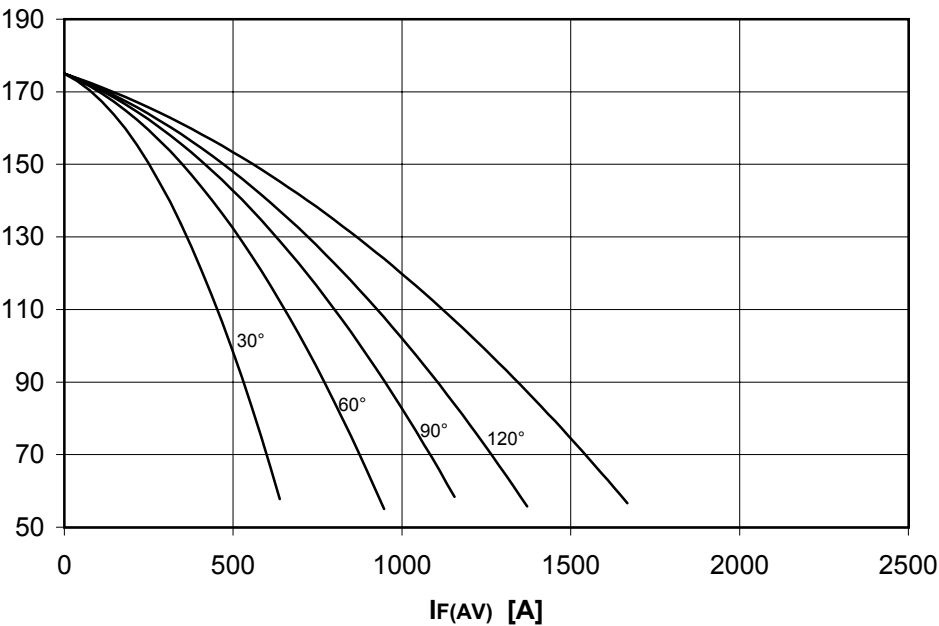

$P_F(AV)$ [W]

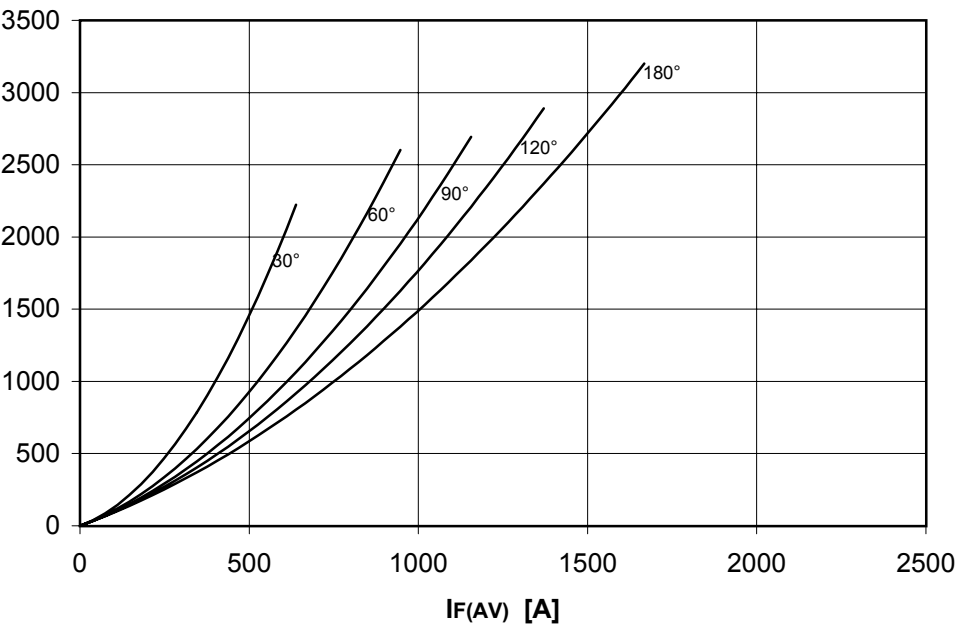


AR1104 RECTIFIER DIODE




FINAL SPECIFICATION mag 02 - ISSUE : 05



FORWARD CHARACTERISTIC
 $T_j = 175^\circ\text{C}$

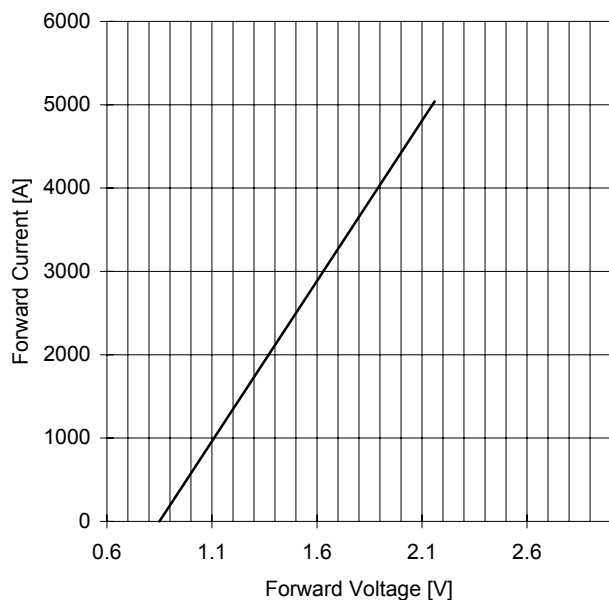

SURGE CHARACTERISTIC
 $T_j = 175^\circ\text{C}$

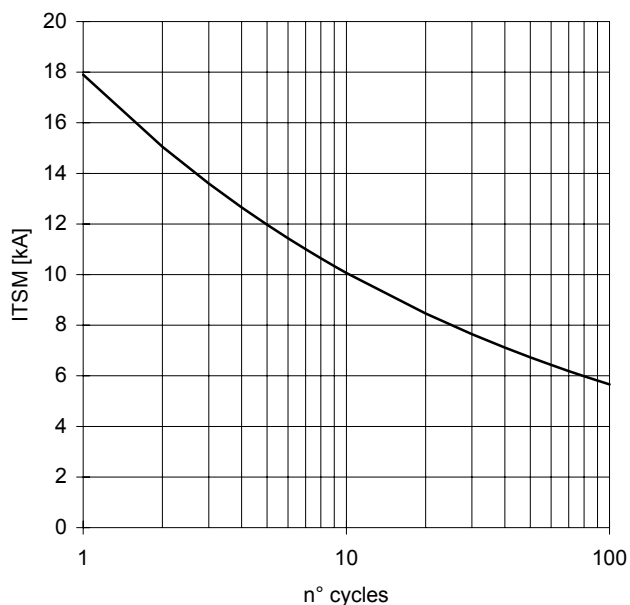

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

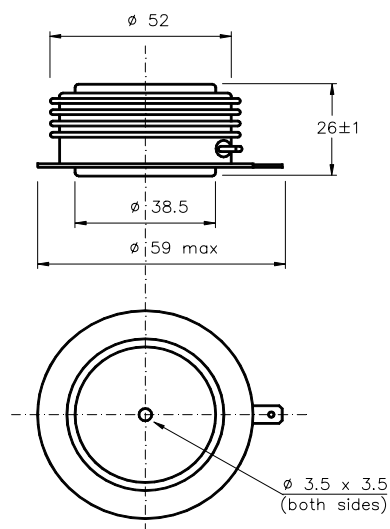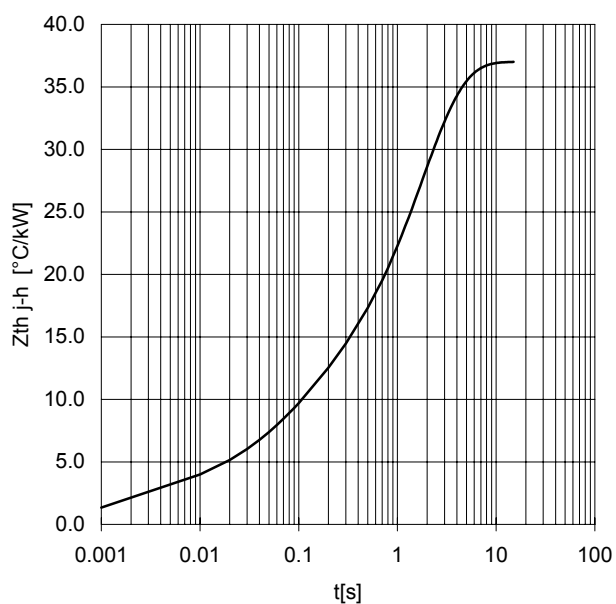

Dimensions
in mm



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm .

In the interest of product improvement POSEICO SPA reserves the right to change any data given in this data sheet at any time without previous notice.

If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

