

[查询AR2004LT供应商](#)

POSEICO SPA
POwer SEmiconductors Italian Corporation

捷多邦 专业PCB打样工厂, 24小时加急出货
 POSEICO SPA
 Via N. Lorenzi 8, 16152 Genova - ITALY
 Tel. ++ 39 010 6556234 - Fax ++ 39 010 6557519
 Sales Office:
 Tel. ++ 39 010 6556775 - Fax ++ 39 010 6442510

RECTIFIER DIODE

AR2004LT

Repetitive voltage up to **2600 V**
 Mean forward current **3180 A**
 Surge current **33.6 kA**

FINAL SPECIFICATION

nov 01 - ISSUE : 04

Symbol	Characteristic	Conditions	T _J [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		175	2600	V
V _{RSM}	Non-repetitive peak reverse voltage		175	2700	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	175	50	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin ,50 Hz, Th=55°C, double side cooled		3180	A
I _{F(AV)}	Mean forward current	180° sin ,50 Hz, Tc=85°C, double side cooled		3420	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	175	33.6	kA
I ² t	I ² t			5645 x 1E3	A²s
V _{FM}	Forward voltage	Forward current = 3400 A	25	1.30	V
V _{F(TO)}	Threshold voltage		175	0.80	V
r _F	Forward slope resistance		175	0.165	mohm
SWITCHING					
t _{rr}	Reverse recovery time		175		µs
Q _{rr}	Reverse recovery charge				µC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		18	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		6	°C/kW
T _j	Operating junction temperature			-30 / 175	°C
F	Mounting force			22.0 / 24.5	kN
	Mass			300	g

ORDERING INFORMATION : AR2004LT S 26

standard specification

VRRM/100



AR2004LT RECTIFIER DIODE




FINAL SPECIFICATION nov 01 - ISSUE : 04


DISSIPATION CHARACTERISTICS

SQUARE WAVE

T_h [°C]

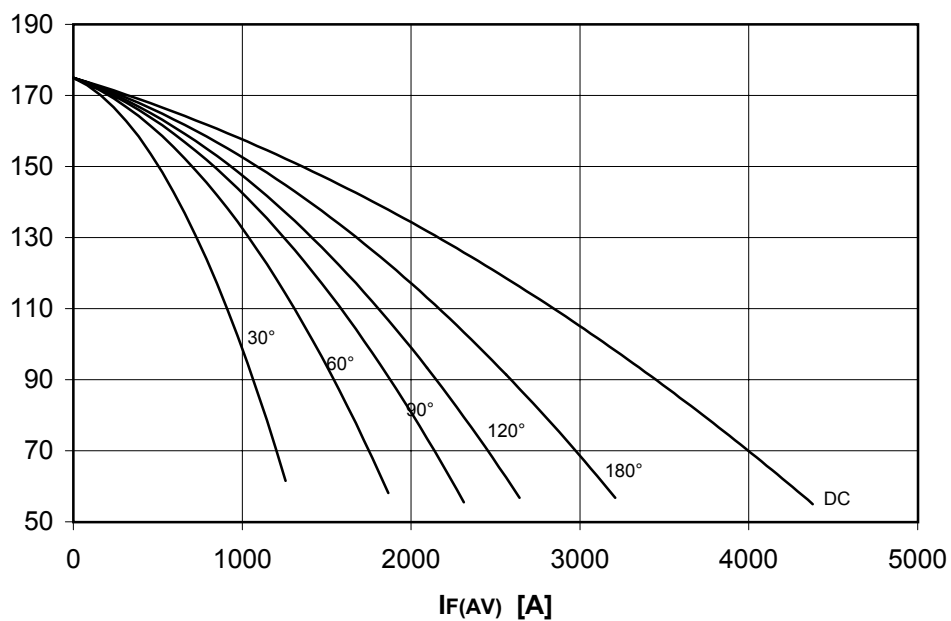

$P_F(AV)$ [W]

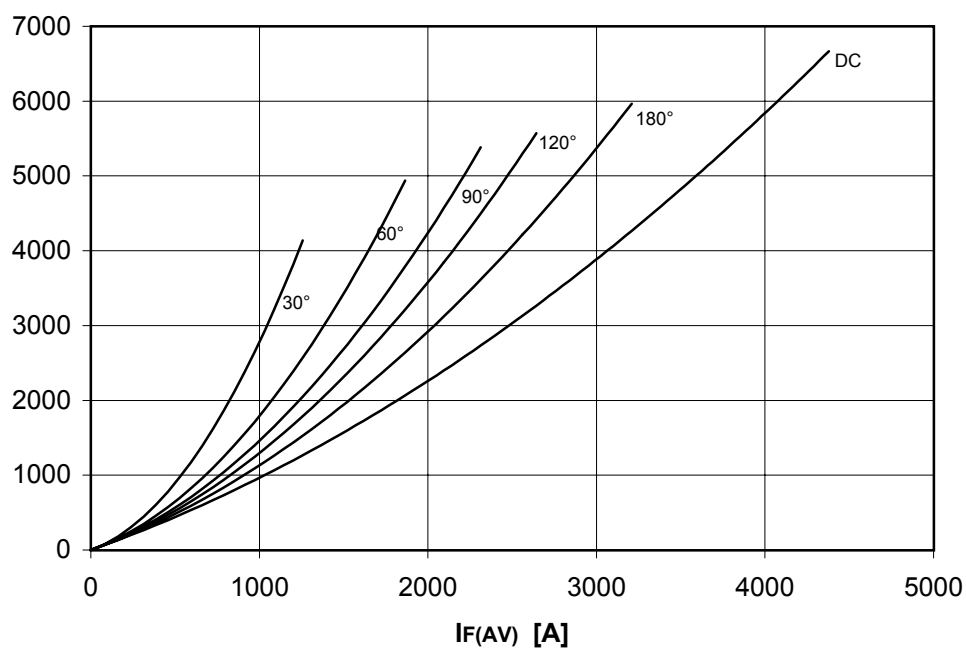

AR2004LT RECTIFIER DIODE




FINAL SPECIFICATION nov 01 - ISSUE : 04


DISSIPATION CHARACTERISTICS

SINE WAVE

T_h [°C]

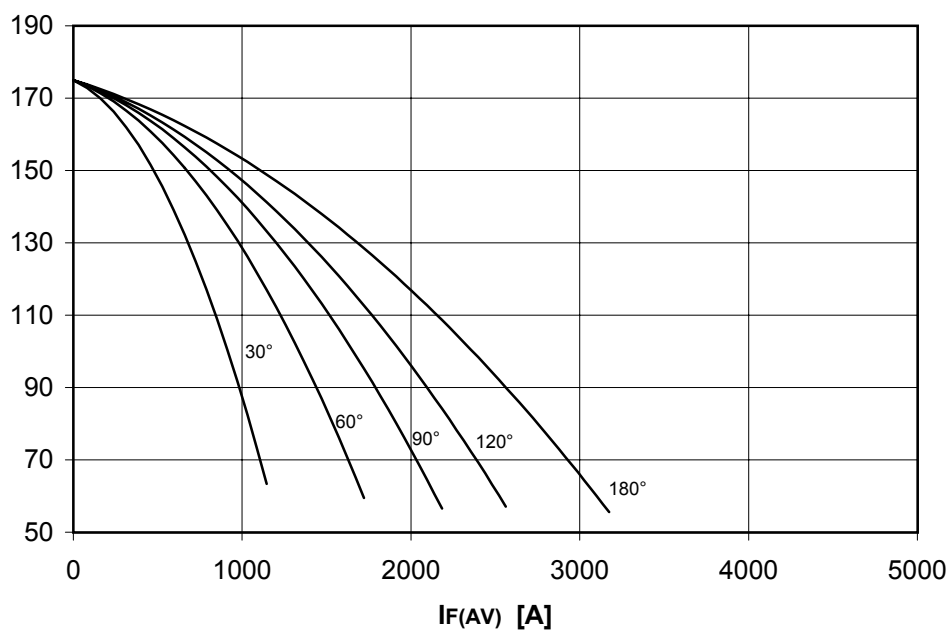

$P_F(AV)$ [W]

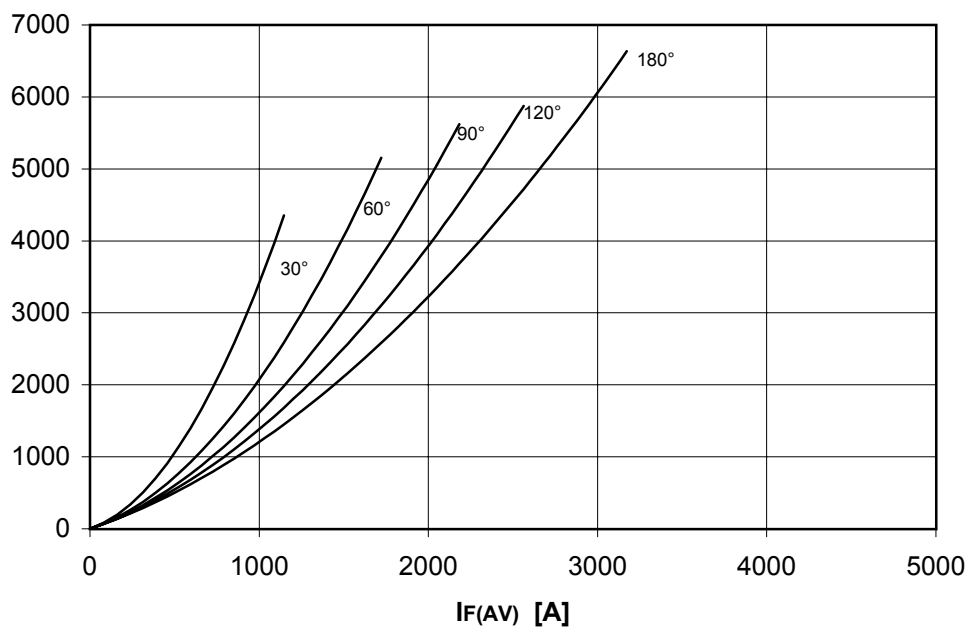


AR2004LT RECTIFIER DIODE




FINAL SPECIFICATION nov 01 - ISSUE : 04



FORWARD CHARACTERISTIC
 $T_j = 175^\circ\text{C}$

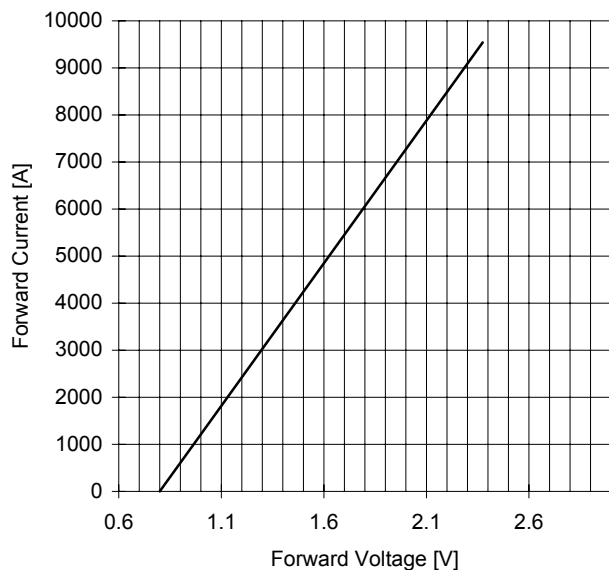

SURGE CHARACTERISTIC
 $T_j = 175^\circ\text{C}$

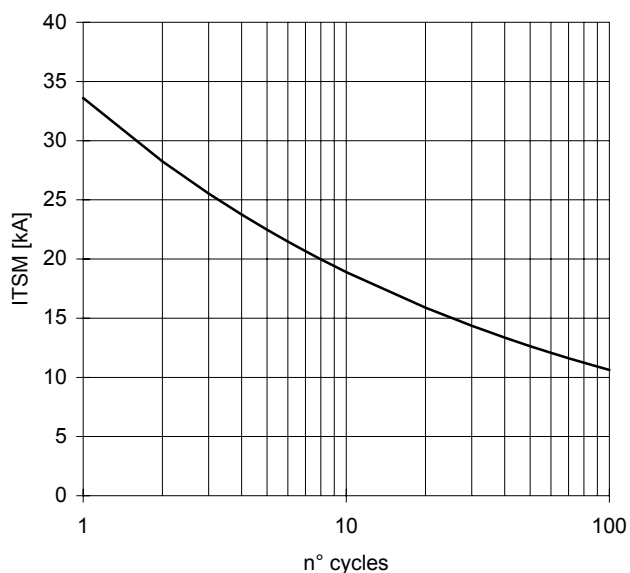

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

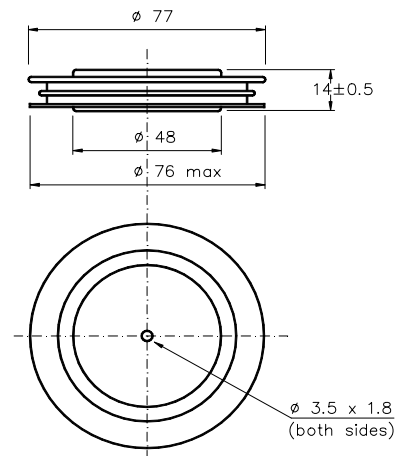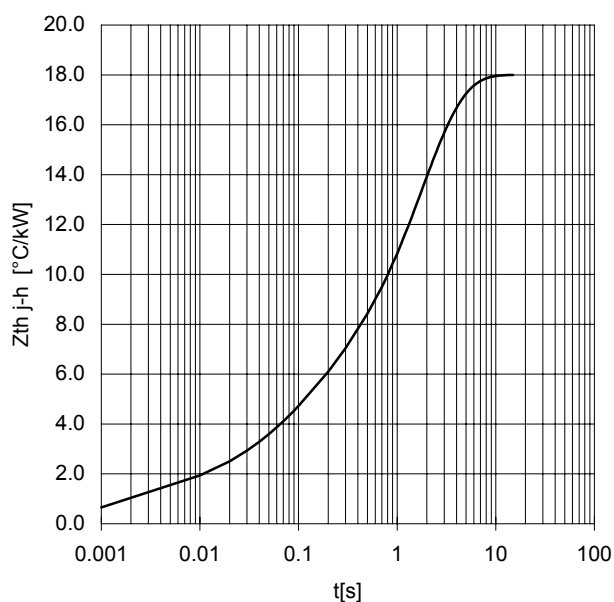

Dimensions
in mm



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness $< .03 \text{ mm}$ and roughness $< 2 \mu\text{m}$.

In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice.

If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

