

RECTIFIER DIODE

AR772HT

Repetitive voltage up to **4500 V**
Mean forward current **4175 A**
Surge current **45 kA**

FINAL SPECIFICATION

Iug 02 - ISSUE : 02

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		175	4500	V
V _{RSM}	Non-repetitive peak reverse voltage		175	4600	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	175	200	mA
CONDUCTING					
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Th=55°C, double side cooled		4175	A
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Tc=85°C, double side cooled		3970	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	175	45	kA
I ² t	I ² t			10125 x 1E3	A²s
V _{FM}	Forward voltage	Forward current = 3000 A	25	1.28	V
V _{F(TO)}	Threshold voltage		175	0.76	V
r _F	Forward slope resistance		175	0.180	mohm
SWITCHING					
t _{rr}	Reverse recovery time	I= 1600 A	175		µs
Q _{rr}	Reverse recovery charge	di/dt= 2A/µs		3500	µC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		11	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		2	°C/kW
T _j	Operating junction temperature			-30 / 175	°C
F	Mounting force			46.0 / 54.0	kN
	Mass			1700	g

AR772HT RECTIFIER DIODE




FINAL SPECIFICATION lug 02 - ISSUE : 02


DISSIPATION CHARACTERISTICS

SQUARE WAVE

Th [°C]

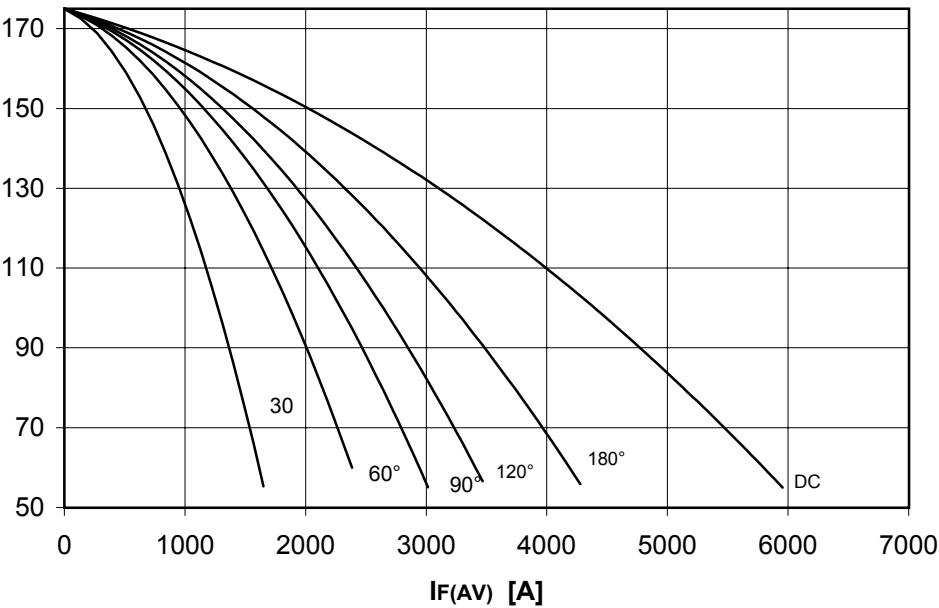

PF(AV) [W]

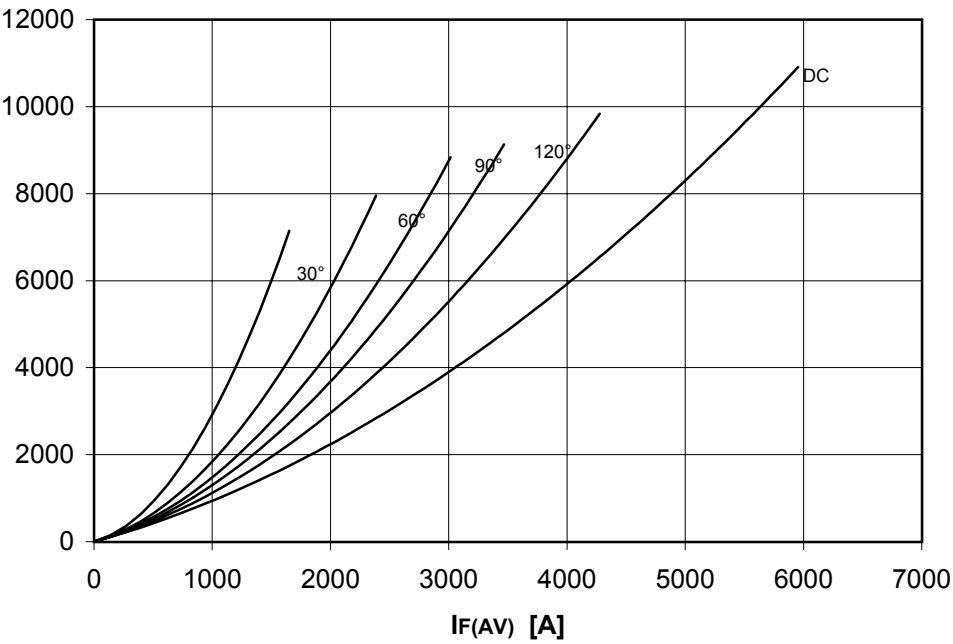

AR772HT RECTIFIER DIODE




FINAL SPECIFICATION lug 02 - ISSUE : 02


DISSIPATION CHARACTERISTICS

SINE WAVE

T_h [°C]

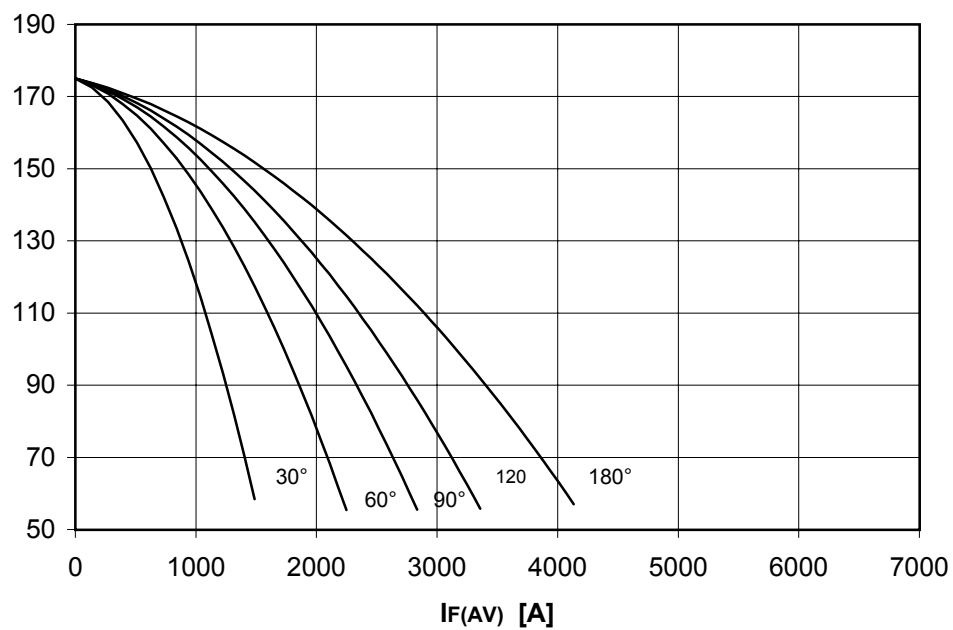

$P_F(AV)$ [W]

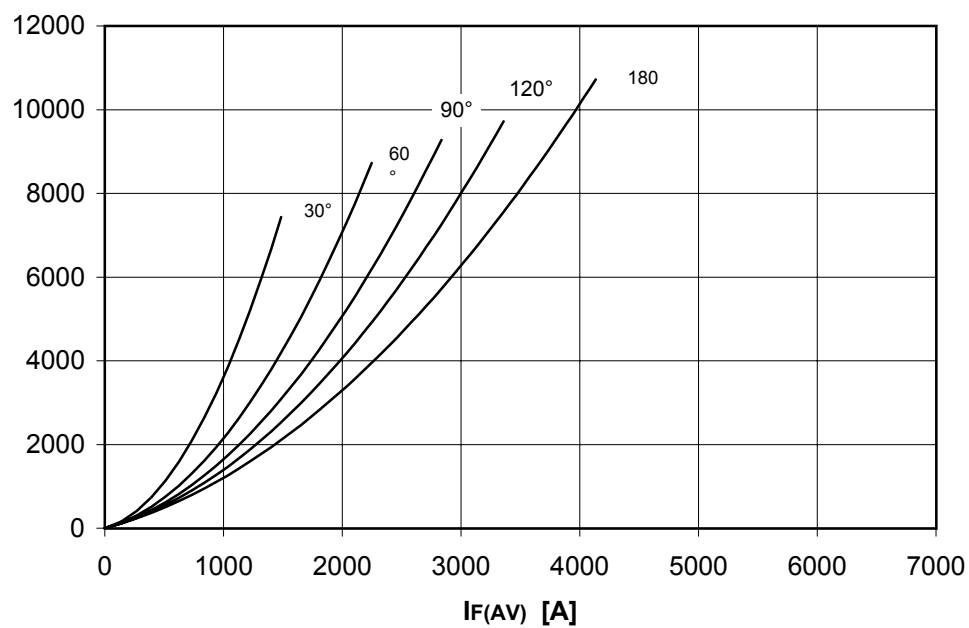


AR772HT RECTIFIER DIODE




FINAL SPECIFICATION lug 02 - ISSUE : 02



FORWARD CHARACTERISTIC
 $T_j = 175\text{ }^{\circ}\text{C}$

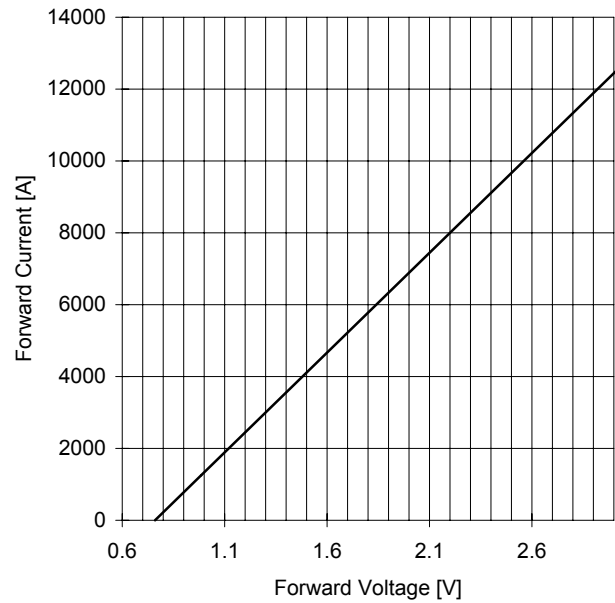


SURGE CHARACTERISTIC
 $T_j = 175\text{ }^{\circ}\text{C}$

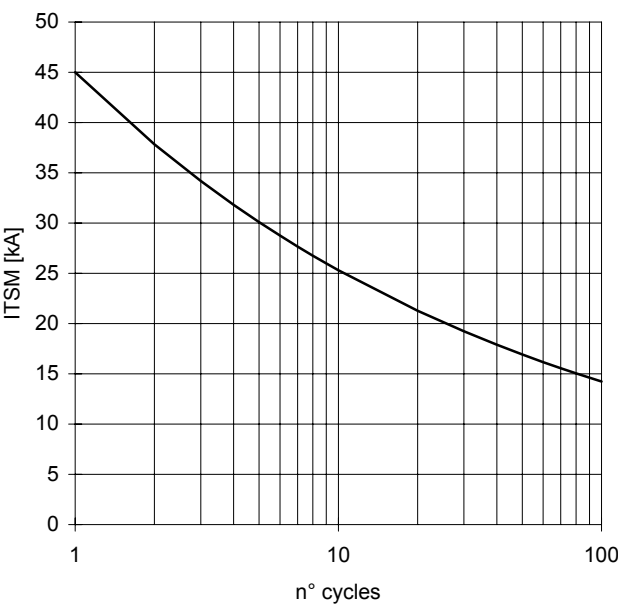

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

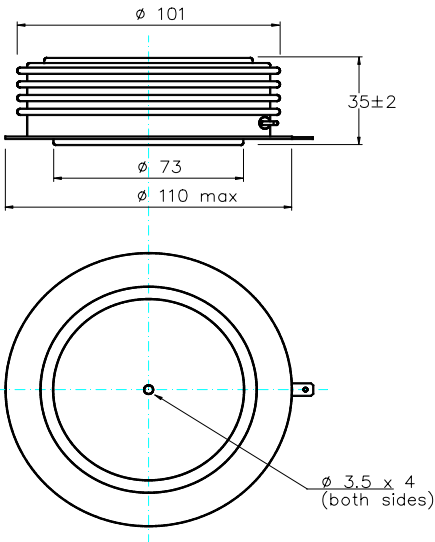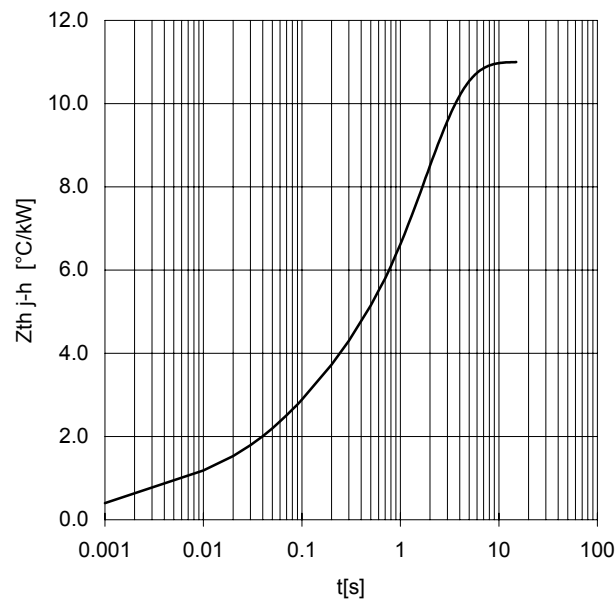

Dimensions
in mm



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm .
In the interest of product improvement POSEICO reserves the right to change any data given in this data sheet at any time without previous notice.
If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

