

FAST RECOVERY DIODE <i>FOR IGBT, IEGT, GCT APPLICATIONS</i> SNUBBERLESS OPERATION LOW LOSSES SOFT RECOVERY	ARF672 Repetitive voltage up to Mean forward current Surge current 4500 V 935 A 15 kA
TARGET SPECIFICATION mar 03 - ISSUE : 2	


Symbol	Characteristic	Conditions	Tj [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		125	4500	V
V _{RSM}	Non-repetitive peak reverse voltage		125	4600	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	125	80	mA
V _{DC LINK}	Permanent DC voltage		125	2500	V
CONDUCTING					
I _{F (AV)}	Mean forward current	180° sin ,50 Hz, Th=55°C, double side cooled		935	A
I _{F (AV)}	Mean forward current	180° square,50 Hz,Th=55°C,double side cooled		970	A
I _{FSM}	Surge forward current	Sine wave, 10 ms	125	15	kA
I ² t	I ² t	reapplied reverse voltage up to 50% VRSM		1125 x1E3	A²s
V _{FM}	Forward voltage	Forward current = 2500 A	125	4.18	V
V _{F(TO)}	Threshold voltage		125	1.80	V
r _F	Forward slope resistance		125	0.950	mohm
SWITCHING					
t _{rr}	Reverse recovery time	IF = 2100 A di/dt= 1100 A/µs VR = 1800 V	125		µs
Q _{rr}	Reverse recovery charge			1600	µC
I _{rr}	Peak reverse recovery current			1100	A
s	Softness (s-factor), min			0.5	
E _{OFF}	Turn off energy dissipation			5.5	J
V _{FR}	Peak forward recovery	di/dt= 400 A/µs	125	38	V
MOUNTING					
R _{th(j-h)}	Thermal impedance	Junction to heatsink, double side cooled		18	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		6	°C/kW
T _j	Operating junction temperature			-30 / 125	°C
F	Mounting force			22.0 / 24.5	kN
	Mass			300	g

ARF672 FAST RECOVERY DIODE




TARGET SPECIFICATION mar 03 - ISSUE : 2



FORWARD CHARACTERISTIC
 $T_j = 125^\circ\text{C}$

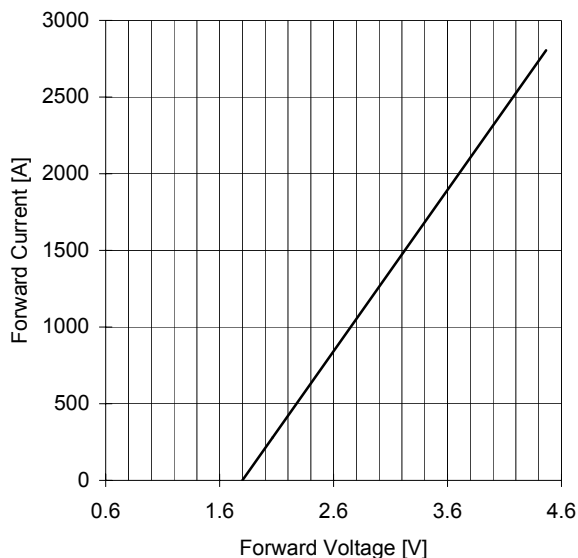


SURGE CHARACTERISTIC
 $T_j = 125^\circ\text{C}$

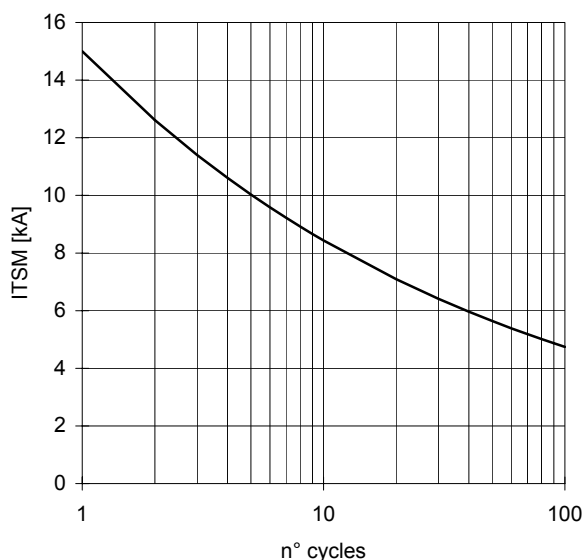

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

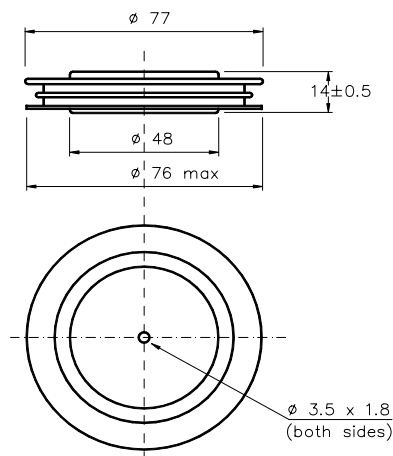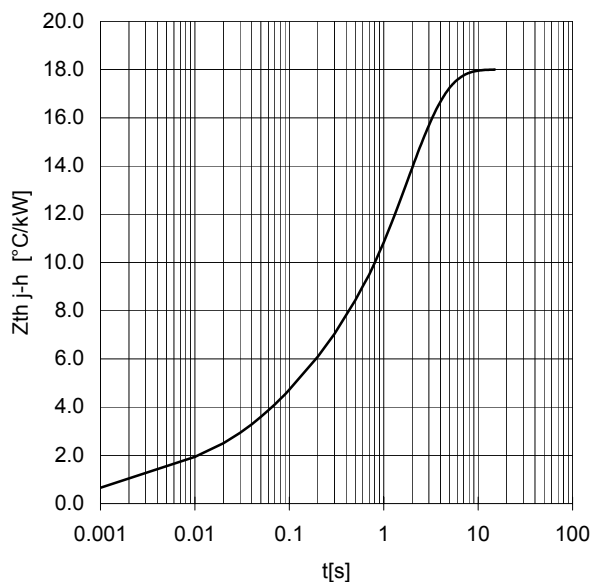

Dimensions
in mm



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness $< .03\text{ mm}$ and roughness $< 2\text{ }\mu\text{m}$.

In the interest of product improvement ANSALDO reserves the right to change any data given in this data sheet at any time without previous notice.

If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

