

# PHEMT GaAs IC High Linearity Positive Control SPDT Switch DC-2 GHz

 Alpha

AS188-92


## Features

- High Linearity (50 dBm IP3 @ 0.9 GHz) @ 3 V
- Low Insertion Loss (0.35 dB @ 0.9 GHz)
- +3 V Operation
- Ultra Miniature SC-70 6 Lead Package
- PHEMT Process

## Description

The AS188-92 is a PHEMT GaAs FET IC high linearity SPDT switch in a SC-70 6 lead plastic package. This switch has been designed for use where extremely high linearity, low insertion loss and ultra miniature package size are required. It can be controlled with positive, negative or a combination of both voltages. Some standard implementations include antenna changeover, T/R and diversity switching over 2 W. The AS188-92 switch can be used in many analog and digital wireless communication systems including cellular, GSM and DECT applications.

## SC-70 6 Lead

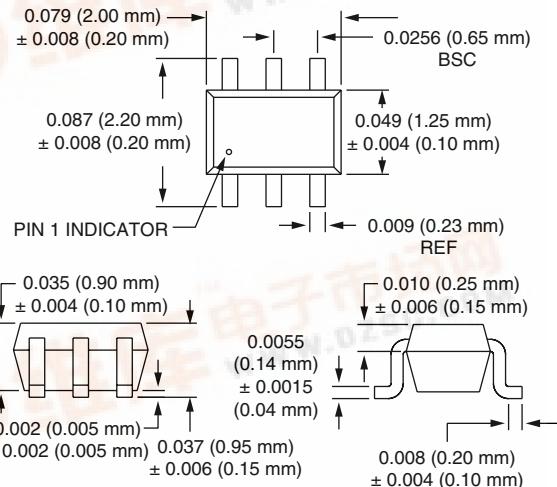

## Electrical Specifications at 25°C (0, +3 V)

Parameter <sup>1</sup>	Frequency <sup>2</sup>	Min.	Typ.	Max.	Unit
Insertion Loss <sup>3</sup>	DC-0.5 GHz DC-1.0 GHz DC-2.0 GHz	0.35 0.35 0.55	0.40 0.50 0.70	0.40 0.50 0.70	dB
Isolation	DC-0.5 GHz DC-1.0 GHz DC-2.0 GHz	23 18 13	26 22 17		dB
VSWR <sup>4</sup>	DC-1.0 GHz DC-2.0 GHz		1.3:1 1.3:1	1.5:1 1.5:1	dB

## Operating Characteristics at 25°C (0, +3 V)

Parameter	Condition	Frequency	Min.	Typ.	Max.	Unit
Switching Characteristics <sup>5</sup>	Rise, Fall (10/90% or 90/10% RF) On, Off (50% CTL to 90/10% RF) Video Feedthru		60 100 50			ns ns mV
Input Power for 1 dB Compression		0.9 GHz		+33		dBm
Intermodulation Intercept Point (IP3)	For Two-tone Input Power +17 dBm	0.9 GHz		+50		dBm
Control Voltages	$V_{Low} = 0$ to 0.2 V @ 20 $\mu$ A Max. $V_{High} = +3$ V @ 100 $\mu$ A Max. to +5 V @ 200 $\mu$ A Max. $V_S = V_{High} \pm 0.2$ V					

1. All measurements made in a 50  $\Omega$  system, unless otherwise specified.


2. DC - 300 kHz.

3. Insertion loss changes by 0.003 dB/°C.


4. Insertion loss state.

5. Video feedthru measured with 1 ns risetime pulse and 500 MHz bandwidth.


## Typical Performance Data (0, +3 V)

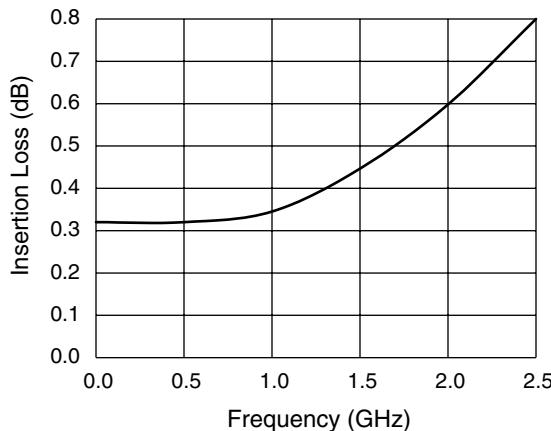

**Insertion Loss vs. Frequency**

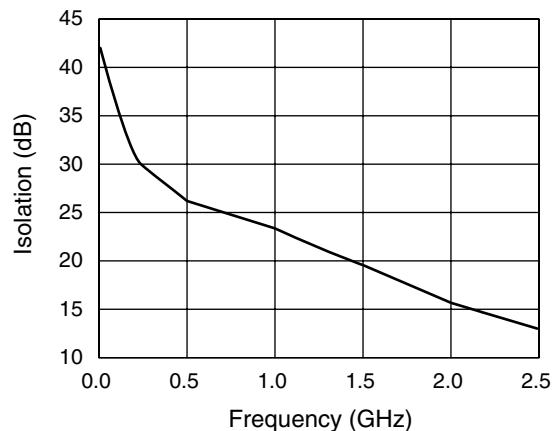

**Isolation vs. Frequency**

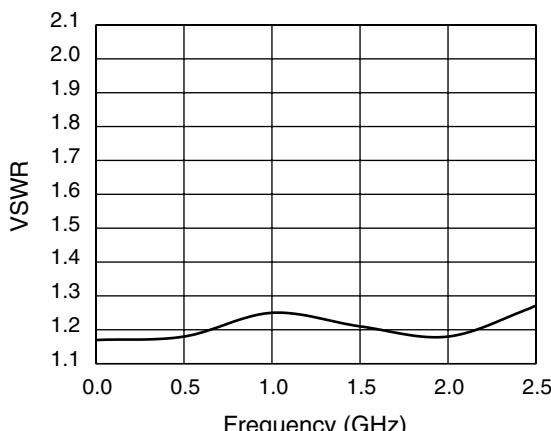

**VSWR vs. Frequency**

## Truth Table


<b>V<sub>1</sub></b>	<b>V<sub>2</sub></b>	<b>J<sub>1</sub>–J<sub>2</sub></b>	<b>J<sub>1</sub>–J<sub>3</sub></b>
0	V <sub>High</sub>	Isolation	Insertion Loss
V <sub>High</sub>	0	Insertion Loss	Isolation

V<sub>High</sub> = +3 to +5 V (V<sub>S</sub> = V<sub>High</sub> ± 0.2 V).

## Absolute Maximum Ratings

Characteristic	Value
RF Input Power	6 W Max. > 900 MHz 0/+7 V Control
Control Voltage	-0.2 V, +7 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
θ <sub>JC</sub>	25°C/W

## Pin Out

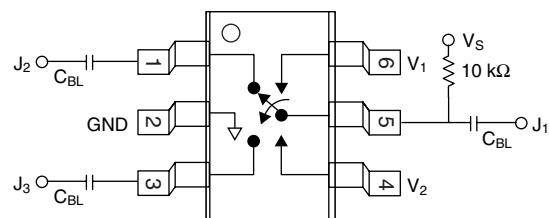

DC blocking capacitors (C<sub>BL</sub>) must be supplied externally.  
C<sub>BL</sub> = 100 pF for operating frequency >500 MHz.