

# SMD ONE PORT 868.35 MHz SAW RESONATOR



5 x 5 x 1.35mm

ASR868.35E

**APPLICATION:** Automotive Electronics/Remote Control  
Wireless Alarm

## STANDARD SPECIFICATIONS:

CHARACTERISTICS		UNIT	MIN.	TYP.	MAX.
Center Frequency Fo		MHz	868.20	868.350	868.50
Tolerance from Fo		KHz		±150	
Insertion Loss		dB	-	1.5	3.0
Quality Factor	Unloaded	-		42,000	
	50Ω loaded			2,000	
Temperature Stability	Turnover Temperature	°C		25.0	
	Turnover Frequency	KHz		Fo	
	Freq. Temp. Coefficient	ppm/°C <sup>2</sup>		0.032	
Frequency Aging		ppm/year		±10	
DC Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model	Motional Resistance R <sub>1</sub>	Ω		12.0	22
	Motional Inductance L <sub>1</sub>	μH		66.0	
	Motional Capacitance C <sub>1</sub>	fF		2.3	
	Shunt Capacitance C <sub>0</sub>	pF	1.4	1.7	2.0
Operating temp.		°C	-40°C to +85°C		
Storage temp.		°C	-45°C to +85°C		
Max. Rating	DC voltage	V	±10		
RF Power Dissipation		dBm	0		


Data measured with: Source Impedance: Z<sub>s</sub>=50Ω, Load Impedance: Z<sub>L</sub>=50Ω, T<sub>A</sub>=25°C  
Electrostatic Sensitive Device. Handle with precaution.

## MARKING:

- 868.35R (868.35 Frequency in MHz)
- A ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004; X: Traceability code)

PIN NO.	CONNECTIONS
1	Input GND
2	Input
5	Output GND
6	Output
3,7	To be GNDed
4,8	Case GND

## OUTLINE DRAWING:

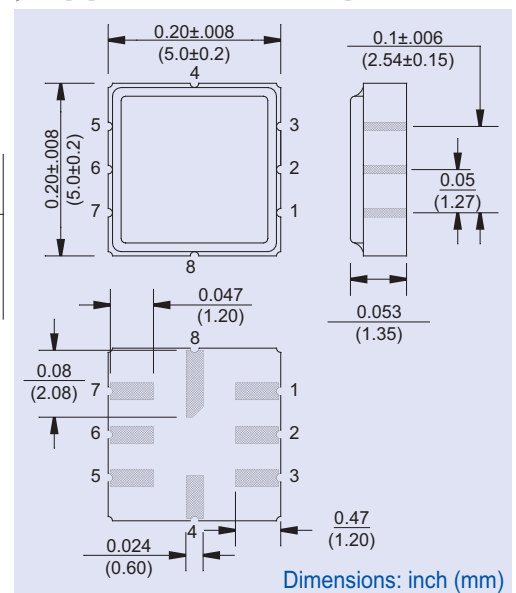

## FREQUENCY RESPONSE:



## TEST CIRCUIT:

