

SMD ONE PORT 915 MHz SAW RESONATOR

ASR915E

APPLICATION: Automotive Electronics/Remote Control



5 x 5 x 1.35mm

STANDARD SPECIFICATIONS:

CHARACTERISTICS		UNIT	MIN.	TYP.	MAX.
Center Frequency Fo		MHz	914.85	915.00	915.15
Tolerance from Fo		KHz		±150	
Insertion Loss		dB	-	1.5	3.0
Quality Factor	Unloaded	-		45,000	
	50Ω loaded			2,100	
Temperature Stability	Turnover Temperature	°C		39.0	
	Turnover Frequency	KHz		Fo+2.7	
	Freq. Temp. Coefficient	ppm/°C ²		0.032	
Frequency Aging		ppm/year		±10	
DC Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model	Motional Resistance R ₁	Ω		28.0	40
	Motional Inductance L ₁	μH		46.8	
	Motional Capacitance C ₁	fF		3.0	
	Shunt Capacitance C ₀	pF	1.0	1.3	1.6
Operating temp.		°C	-40°C to +85°C		
Storage temp.		°C	-45°C to +85°C		
Max. Rating	DC voltage	V	±10		
RF Power Dissipation		dBm	0		

Data measured with: Source Impedance: Z_s=50Ω, Load Impedance: Z_L=50Ω, T_A=25°C


Electrostatic Sensitive Device. Handle with precaution.

MARKING:


- 915R (915 Frequency in MHz)
- A ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004; X: Traceability code)

PIN NO.	CONNECTIONS
1	Input GND
2	Input
5	Output GND
6	Output
3,7	To be GNDed
4,8	Case GND


OUTLINE DRAWING:

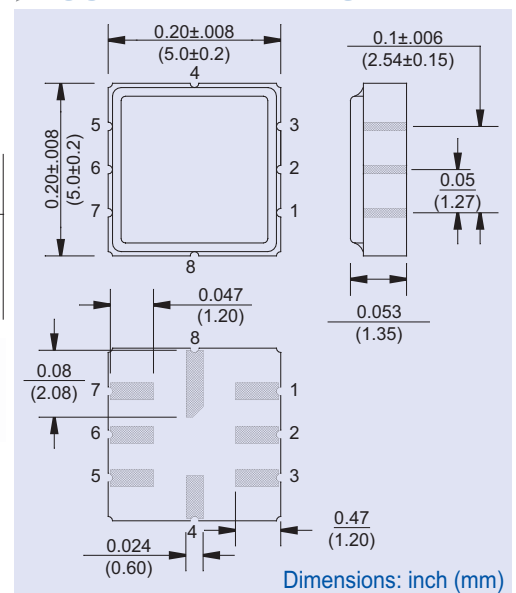

FREQUENCY RESPONSE:

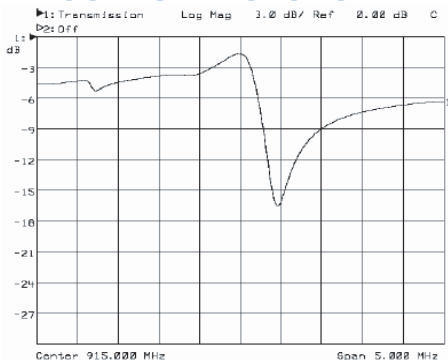

TEST CIRCUIT:



ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com