



B40-B380/C1000

SILICON BRIDGE RECTIFIERS


PRV : 100 - 900 Volts
Io : 1.0 Amperes

FEATURES :

- * High case dielectric strength
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Ideal for printed circuit board

MECHANICAL DATA :

- * Case : Reliable low cost construction utilizing molded plastic technique
- * Epoxy : UL94V-O rate flame retardant
- * Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 1.29 grams

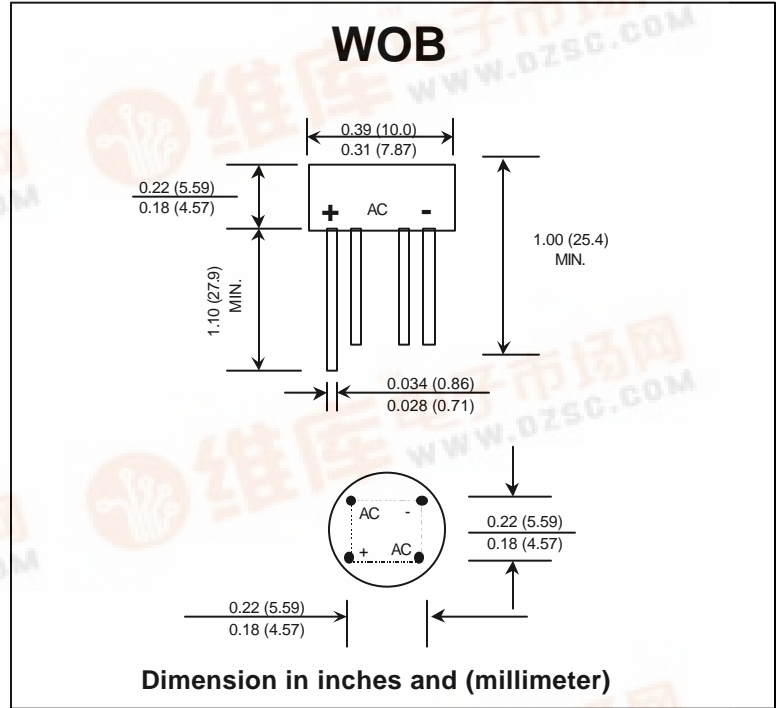

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.


| RATING | SYMBOL | B40-C1000 | B80-C1000 | B125-C1000 | B250-C1000 | B380-C1000 | UNIT |
|--|--------------------|---------------|-----------|------------|------------|------------|------------------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 100 | 200 | 300 | 600 | 900 | Volts |
| Maximum RMS Input Voltage R+C -Load | V _{RMS} | 40 | 80 | 125 | 250 | 380 | Volts |
| Maximum DC Blocking Voltage | V _{DC} | 100 | 200 | 300 | 600 | 900 | Volts |
| Maximum Average Forward Current For Free Air Operation at T _c = 45°C R+L -Load C -Load | I _{F(AV)} | 1.2 1.0 | | | | | Amps. |
| Peak Forward Surge Current Single half sine wave on rated load (JEDEC Method) at T _J = 125 °C | I _{FSM} | 40 | | | | | Amps. |
| Rating for fusing at T _J = 125°C (t < 100 ms.) | I ² t | 10 | | | | | A ² S |
| Maximum Series Resistor C-Load V _{RMS} = ± 10% | R _t | 1.0 | 2.0 | 4.0 | 8.0 | 12.0 | Ω |
| Maximum load Capacitance + 50% -10% | C _L | 5000 | 2500 | 1000 | 500 | 200 | μF |
| Maximum Forward Voltage per Diode at I _F = 1.0 Amp. | V _F | 1.0 | | | | | Volts |
| Maximum Reverse Current at Rated Repetitive Peak Voltage per Diode T _a = 25 °C | I _R | 10 | | | | | μA |
| Typical Thermal Resistance (Note 1) | R _{θJA} | 36 | | | | | °C/W |
| Operating Junction Temperature Range | T _J | - 50 to + 125 | | | | | °C |
| Storage Temperature Range | T _{STG} | - 50 to + 125 | | | | | °C |

Notes :

1) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board with, 0.22" x 0.22" (5.5 x 5.5 mm)

RATING AND CHARACTERISTIC CURVES (B40-B380/C1000)

**FIG.1 - DERATING CURVE
FOR OUTPUT RECTIFIED CURRENT
B40 C1000 - B125 C1000**

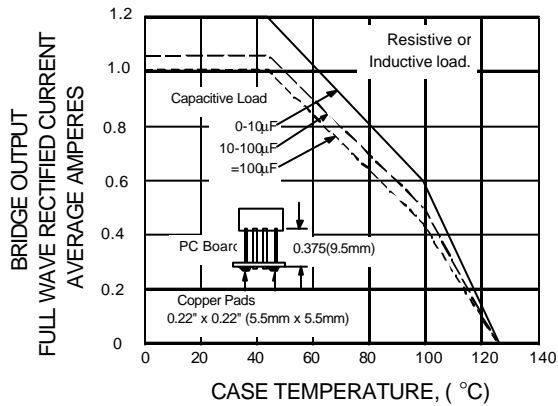

**FIG.2 - DERATING CURVE
FOR OUTPUT RECTIFIED CURRENT
B250 C1000 - B380 C1000**

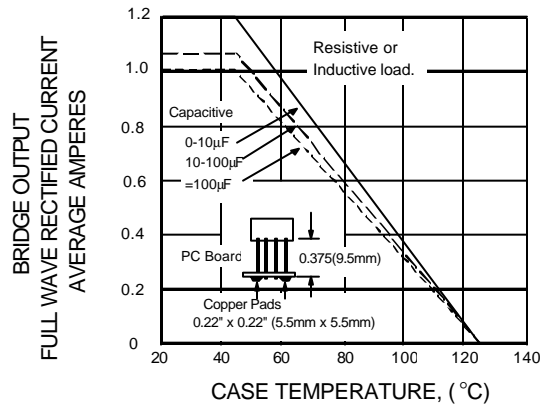


FIG.3 - TYPICAL FORWARD CHARACTERISTICS



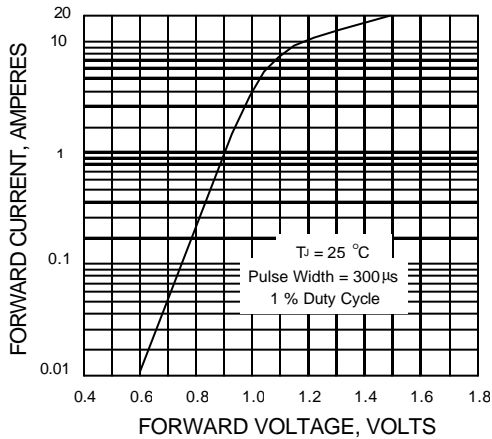


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

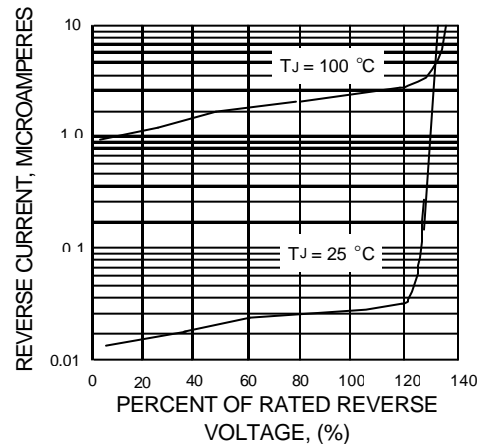

**FIG.5 - MAXIMUM NON-REPETITIVE
PEAK FORWARD CURRENT**

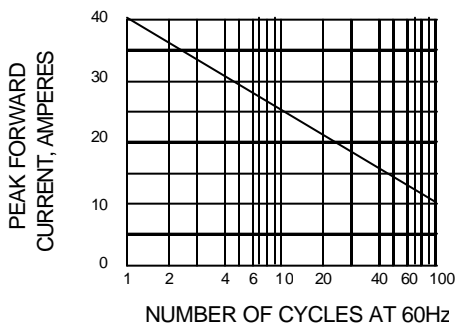

**FIG.6 - TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT**

