

## SEMICONDUCTOR TECHNICAL DATA



## B15A60VIC SCHOTTKY BARRIER TYPE DIODE STACK

SWITCHING TYPE POWER SUPPLY APPLICATION,  
CONVERTER & CHOPPER APPLICATION.

### FEATURES

- Average Output Rectified Current :  $I_O=15A$  ( $T_c=114^\circ C$ ).
- Repetitive Peak Reverse Voltage :  $V_{RRM}=60V$ .
- Fast Reverse Recovery Time :  $t_{rr}=35ns$ .
- Low Peak Forward Voltage :  $0.52V$ .(Typ)

### POLARITY

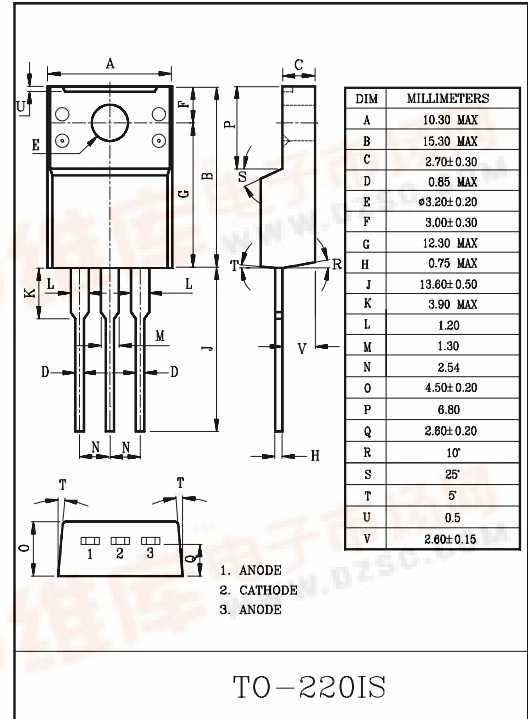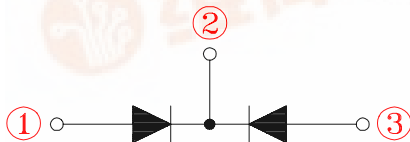

### MAXIMUM RATINGS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	$V_{RRM}$	60	V
Average Output Rectified Current ( $T_c=114^\circ C$ ) (Rated $V_R$ ) (Note)	$I_O$	15	A
Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz)	$I_{FSM}$	100	A
Junction Temperature	$T_j$	-40~150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55~150	$^\circ C$

Note : average forward current of centertap full wave connection.

### ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage (Note)	$V_{FM}$	$I_{FM}=7.5A$	-	0.52	0.58	V
Repetitive Peak Reverse Current (Note)	$I_{RRM}$	$V_{RRM}=\text{Rated}$	-	-	0.5	mA
Reverse Recovery Time (Note)	$t_{rr}$	$I_F=1.0A, di/dt=-30A/\mu s$	-	-	35	ns
Thermal Resistance (Note)	$R_{th(j-c)}$	Junction to Case	-	-	4.0	$^\circ C/W$

Note : A value of one cell

# B15A60VIC

