


# MBRB735 THRU MBRB760

## SCHOTTKY RECTIFIER

**Reverse Voltage - 35 to 60 Volts      Forward Current - 7.5 Amperes**

TO-263AB

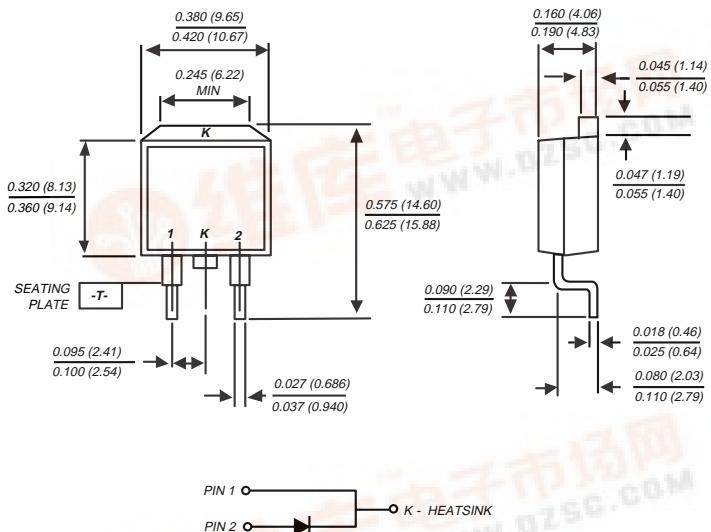

Dimensions in inches and (millimeters)

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Metal silicon junction majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- High temperature soldering in accordance with CECC 802 / Reflow guaranteed



## MECHANICAL DATA

**Case:** JEDEC TO-263AB molded plastic body

**Terminals:** Lead solderable per MIL-STD-750, Method 2026

**Polarity:** As marked

**Mounting Position:** Any

**Weight:** 0.08 ounces, 2.24 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	<b>SYMBOLS</b>	<b>MBRB735</b>	<b>MBRB745</b>	<b>MBRB750</b>	<b>MBRB760</b>	<b>UNITS</b>
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	35	45	50	60	Volts
Maximum working peak reverse voltage	V <sub>RWM</sub>	35	45	50	60	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	35	45	50	60	Volts
Maximum average forward rectified current (SEE FIG 1)	I <sub>(AV)</sub>			7.5		Amps
Peak repetitive forward current (square wave, 20 KHz) at T <sub>C</sub> =105°C	I <sub>FRM</sub>			15.0		Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>			150.0		Amps
Peak repetitive reverse surge current (NOTE 1)	I <sub>RRM</sub>		1.0		0.5	Amps
Maximum instantaneous forward voltage at (NOTE 2)	I <sub>F</sub> =7.5A, T <sub>C</sub> =25°C I <sub>F</sub> =7.5A, T <sub>C</sub> =125°C I <sub>F</sub> =15A, T <sub>C</sub> =25°C I <sub>F</sub> =15A, T <sub>C</sub> =125°C	V <sub>F</sub>	- 0.57 0.84 0.72		0.75 0.65 - -	Volts
Maximum instantaneous reverse current at (NOTE 1)	I <sub>R</sub>	0.1 15.0		0.5 50.0		mA
Voltage rate of change (rated V <sub>R</sub> )	dV/dt		10,000		1,000	V/μs
Maximum thermal resistance, (NOTE 3)	R <sub>θJC</sub>			3.0		°C/W
Operating junction temperature range	T <sub>J</sub>			-65 to +150		°C
Storage temperature range	T <sub>STG</sub>			-65 to +175		°C

**NOTES:**

- (1) 2.0μs pulse width, f=1.0 KHz
- Pulse test: 300μs pulse width, 1% duty cycle
- Thermal resistance from junction to case

## RATINGS AND CHARACTERISTIC CURVES MBRB735 THRU MBRB760

