

Quad ground sense operational amplifier

BA10324A / BA10324AF / BA10324AFV

The BA10324A, BA10324AF, and BA10324AFV are monolithic ICs with four built-in operational amplifiers featuring internal phase compensation.

Either a dual or single power supply can be driven, and these products can be driven by a digital system 5V single power supply. These products can be used in a wide range of administrative and industrial applications, including transducer amplifiers and DC amplifiers.

● Applications

Ground sensing type pre-amplifiers

Active filters

DC amplifiers

Pulse generators.


● Features

- 1) Wide range of operating power supply voltages and single power supply drive enabled.
(single power supply: 3 to 32V, dual power supply: \pm 1.5 to \pm 16V)
- 2) Common-mode input voltage can be operated from the ground level.
- 3) Differential input voltage can be operated up to the power supply voltage level.


- 4) Low current dissipation. ($I_Q = 0.6\text{mA}$)
- 5) Low offset voltage and offset current. ($V_{IO} = 2\text{mV}$, $I_{IO} = 5\text{nA}$ typ.)
- 6) Four operational amplifiers with phase compensation are built into the DIP / SOP Pin 14.
- 7) Compatible with model 324 operational amplifiers of other manufacturers.

● Block diagram

BA10324A / BA10324AF / BA10324AFV

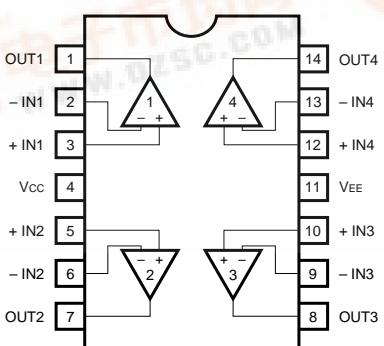

● Internal circuit configuration

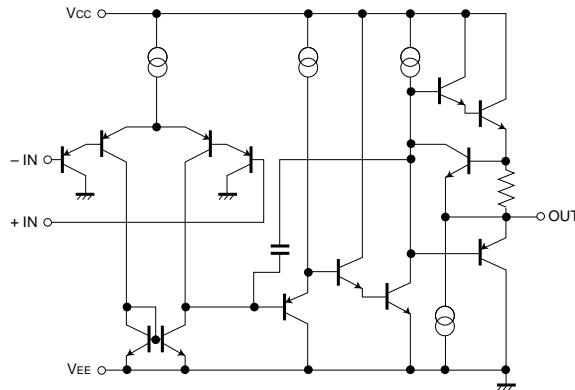

● Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits			Unit
		BA10324A	BA10324AF	BA10324AFV	
Power supply voltage	V _{cc}	32 (± 16)	32 (± 16)	32 (± 16)	V
Power dissipation	P _d	950*	450*	400*	mW
Differential input voltage	V _{ID}	$\pm V_{cc}$	$\pm V_{cc}$	$\pm V_{cc}$	V
Common-mode input voltage	V _I	$-0.3 \sim V_{cc}$	$-0.3 \sim V_{cc}$	$-0.3 \sim V_{cc}$	V
Operating temperature	T _{opr}	$-40 \sim +85$	$-40 \sim +85$	$-40 \sim +85$	°C
Storage temperature	T _{stg}	$-55 \sim +125$	$-55 \sim +125$	$-55 \sim +125$	°C

* Refer to the Pd characteristics diagram.

The values for the are those when BA10324AF / BA10324AFV it is mounted on a glass epoxy board (50mm × 50mm × 1.6mm).

Standard ICs

BA10324A / BA10324AF / BA10324AFV

● Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$, $V_{cc} = 5\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input offset voltage	V_{io}	—	2	7	mV	$R_s = 50\Omega$
Input offset current	I_{io}	—	5	50	nA	
Input bias current	I_b	—	20	250	nA	*1
Common-mode input voltage	V_{icm}	0	—	$V_{cc} - 1.5$	V	
Common-mode rejection ratio	CMRR	65	75	—	dB	
High-amplitude voltage gain	A_{vo}	87	100	—	dB	$R_L \geq 2\text{k}\Omega$, $V_{cc} = 15\text{V}$
Power supply voltage rejection ratio	PSRR	65	100	—	dB	$R_s = 50\Omega$
Quiescent current	I_Q	—	0.6	2.0	mA	$R_L = \infty$, on All Op - Amps
Maximum output voltage	V_{oh}	$V_{cc} - 1.5$	—	—	V	$R_L = 2\text{k}\Omega$
	V_{ol}	—	—	0.25	V	$R_L = \infty$
Maximum output current	I_{oh}	20	35	—	mA	$V_o = 0$
Sink	I_{ol}	10	20	—	mA	$V_o = V_{cc}$
Channel separation	CS	—	120	—	dB	$f = 1\text{kHz}$ input conversion

*1 Because the first stage is configured with a PNP transistor, input bias current is from the IC.

● Electrical characteristic curves

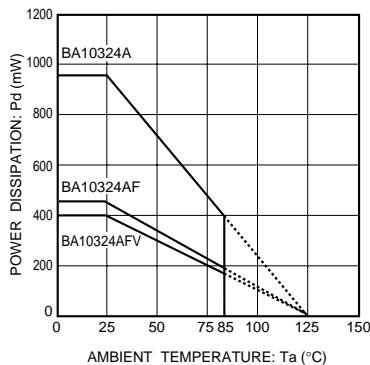


Fig.1 Power dissipation vs. ambient temperature

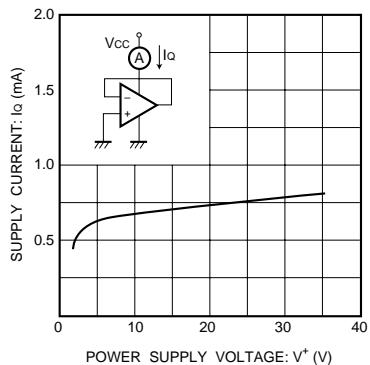


Fig.2 Quiescent current vs. power supply voltage

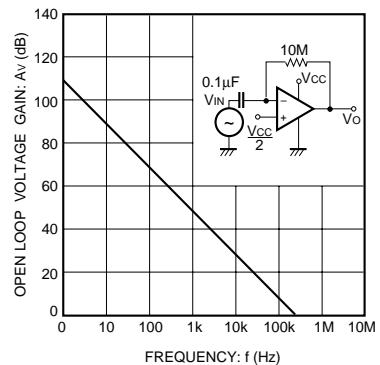


Fig.3 Open loop voltage gain vs. frequency

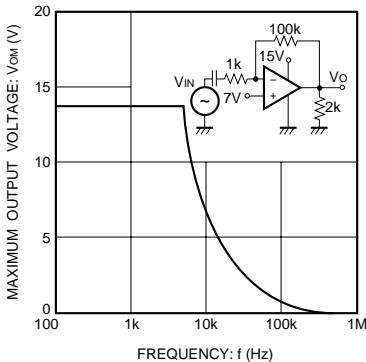


Fig.4 Maximum output voltage vs. frequency

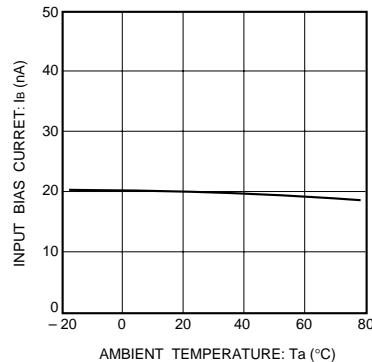


Fig.5 Input bias current vs. ambient temperature

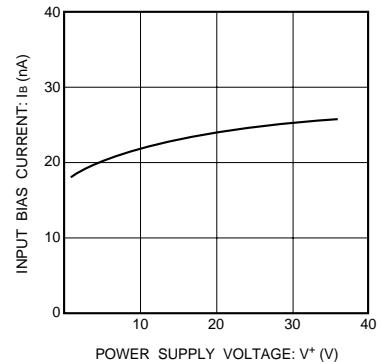


Fig.6 Input bias current vs. power supply voltage

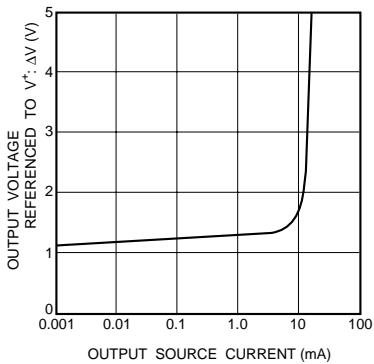


Fig.7 Potential difference during power supply output vs. output source current

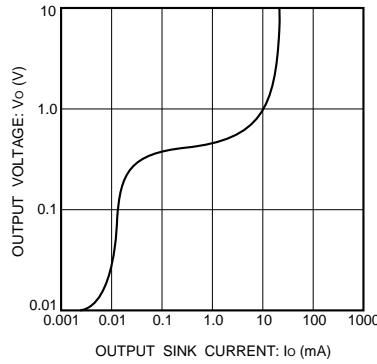


Fig.8 Output voltage vs. output sink current

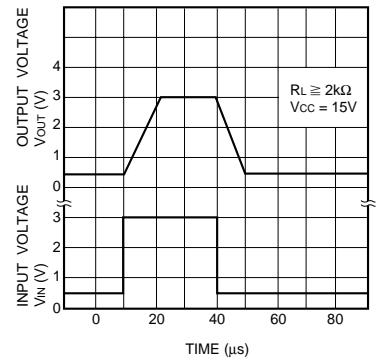


Fig.9 Output response characteristics

● Operation notes

(1) Unused circuit connections

If there are any circuits which are not being used, we recommend making connections as shown in Figure 10, with the non-inverted input pin connected to the potential within the in-phase input voltage range (V_{ICM}).





Fig.10 Unused circuit connections

Standard ICs

BA10324A / BA10324AF / BA10324AFV


- External dimensions (Units: mm)

BA10324A

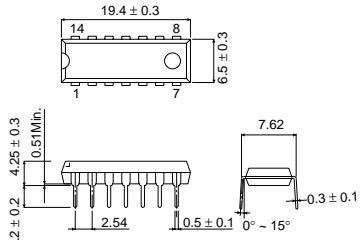


DIP14

BA10324AF

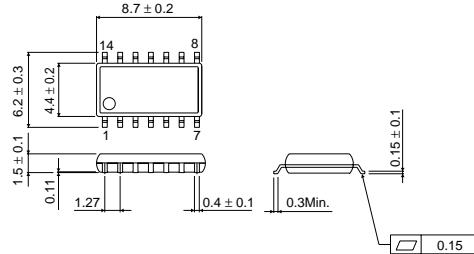

SOP14

BA10324AFV

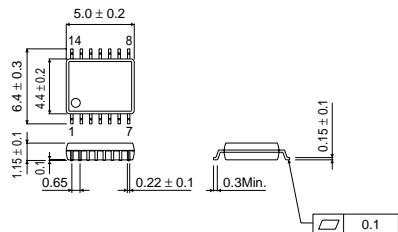

SSOP-B14