





PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1 = 4.7\text{k}\Omega$, $R_2 = 10\text{k}\Omega$)

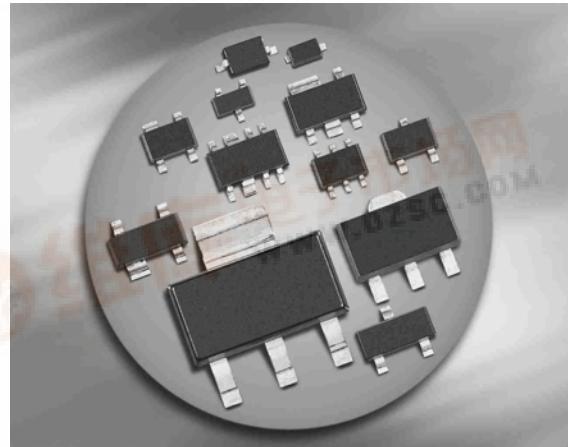

BCR164F/L3

BCR164T



Type	Marking	Pin Configuration						Package
BCR164F*	U6s	1=B	2=E	3=C	-	-	-	TSFP-3
BCR164L3*	U6	1=B	2=E	3=C	-	-	-	TSLP-3-4
BCR164T*	U6s	1=B	2=E	3=C	-	-	-	SC75

* Preliminary

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Emitter-base voltage	V_{EBO}	5	
Input on voltage	$V_{i(on)}$	15	
Collector current	I_C	100	mA
Total power dissipation- BCR164F, $T_S \leq 128^\circ\text{C}$ BCR164L3, $T_S \leq 135^\circ\text{C}$ BCR164T, $T_S \leq 109^\circ\text{C}$	P_{tot}	250 250 250	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BCR164F	R_{thJS}	≤ 90	-
BCR164L3		≤ 60	
BCR164T		≤ 165	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Collector-base cutoff current $V_{CB} = 40 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{EB} = 10 \text{ V}, I_C = 0$	I_{EBO}	-	-	520	μA
DC current gain ²⁾ $I_C = 5 \text{ mA}, V_{CE} = 5 \text{ V}$	h_{FE}	30	-	-	-
Collector-emitter saturation voltage ²⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100 \mu\text{A}, V_{CE} = 5 \text{ V}$	$V_{i(\text{off})}$	0.5	-	1.1	
Input on voltage $I_C = 2 \text{ mA}, V_{CE} = 0.3 \text{ V}$	$V_{i(\text{on})}$	0.5	-	1.4	
Input resistor	R_1	3.2	4.7	6.2	k Ω
Resistor ratio	R_1/R_2	0.42	0.47	0.52	-


AC Characteristics

Transition frequency $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	160	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	3	-	pF


¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

²Pulse test: $t < 300\mu\text{s}$; $D < 2\%$


DC current gain $h_{FE} = f(I_C)$
 $V_{CE} = 5 \text{ V}$ (common emitter configuration)

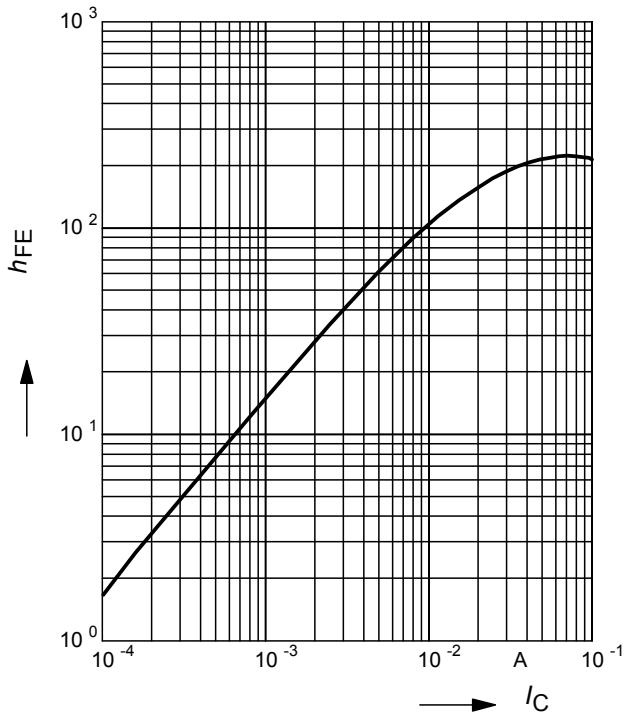


Input on Voltage $V_{i(on)} = f(I_C)$
 $V_{CE} = 0.3 \text{ V}$ (common emitter configuration)

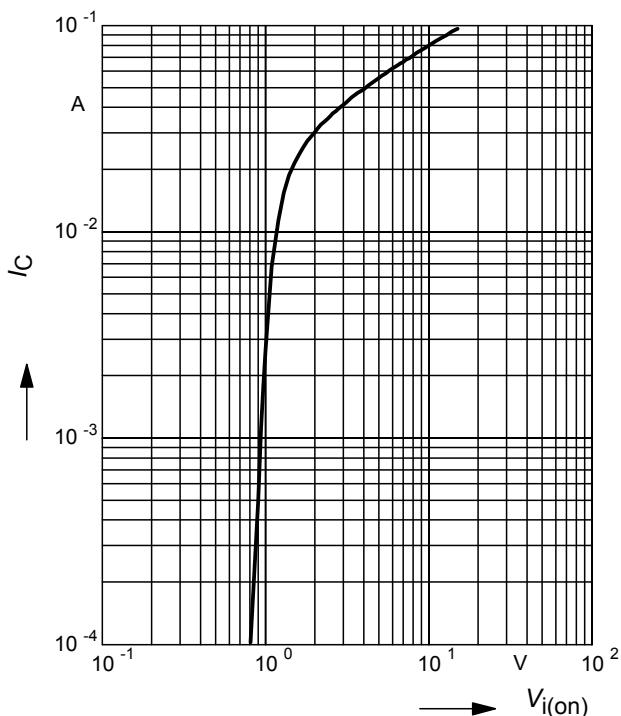

Collector-emitter saturation voltage
 $V_{CEsat} = f(I_C)$, $h_{FE} = 20$

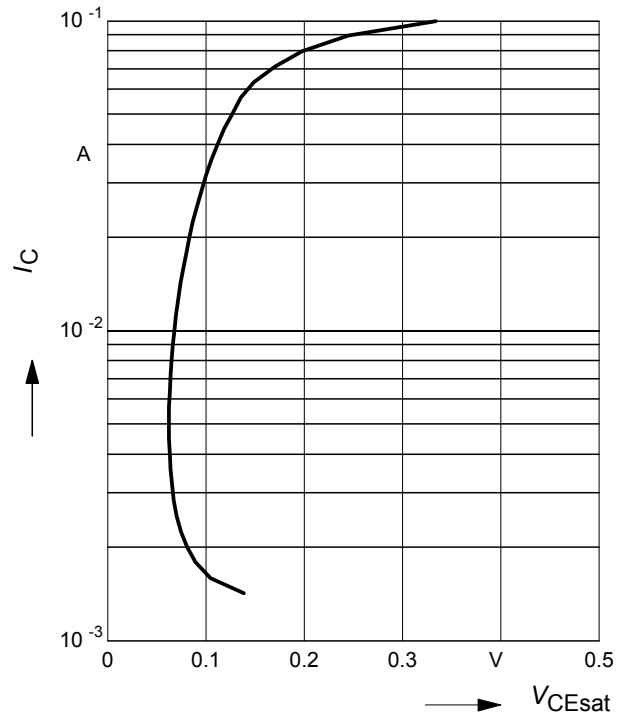


Input off voltage $V_{i(off)} = f(I_C)$
 $V_{CE} = 5 \text{ V}$ (common emitter configuration)

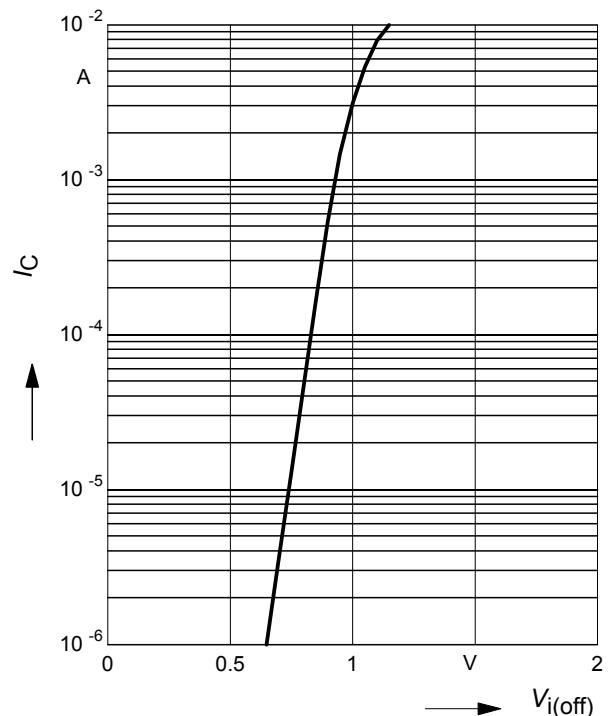


Total power dissipation $P_{\text{tot}} = f(T_S)$


BCR164F

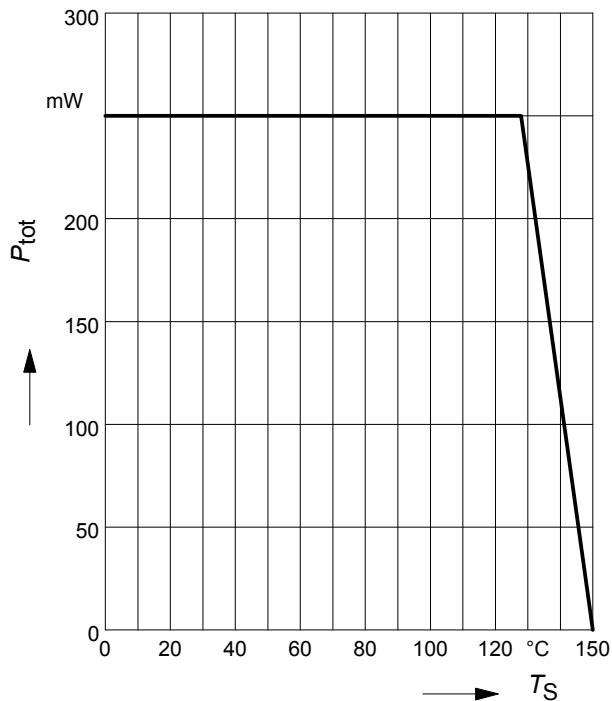
Total power dissipation $P_{\text{tot}} = f(T_S)$


BCR164T

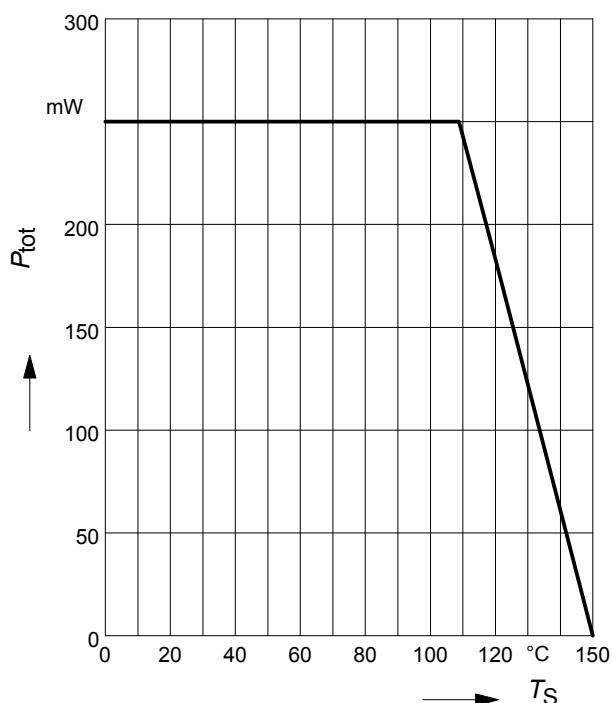
Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR164L3

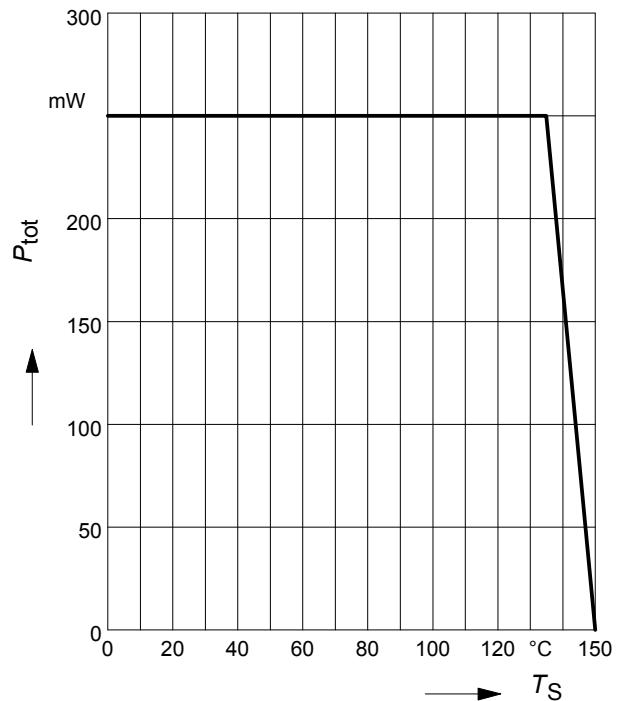
Permissible Puls Load $R_{\text{thJS}} = f(t_p)$


BCR164F

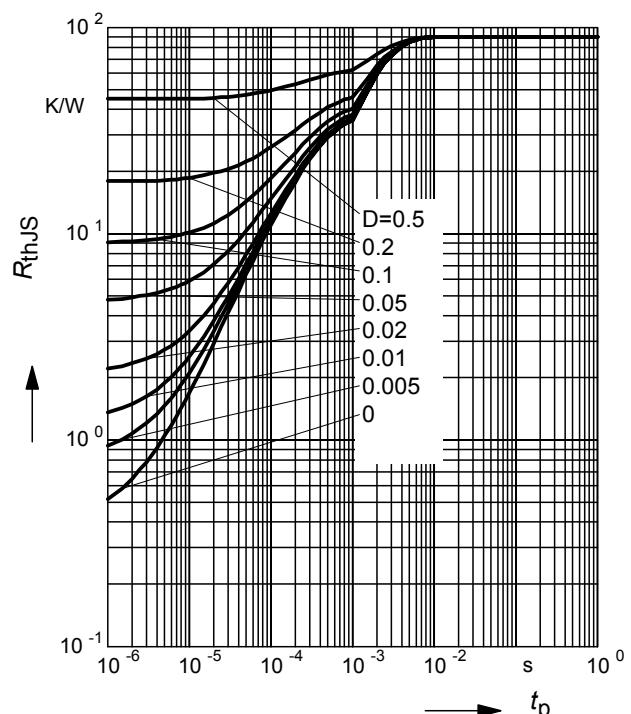

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$


BCR164F

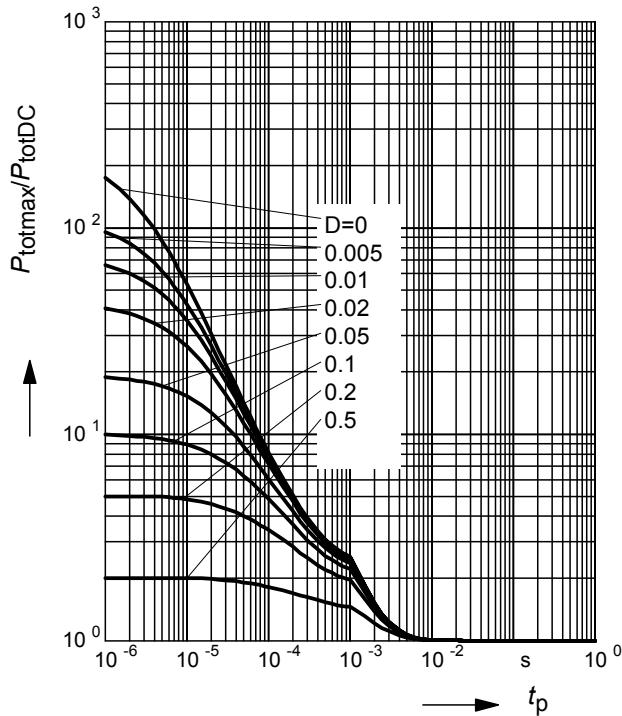

Permissible Pulse Load


$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR164L3

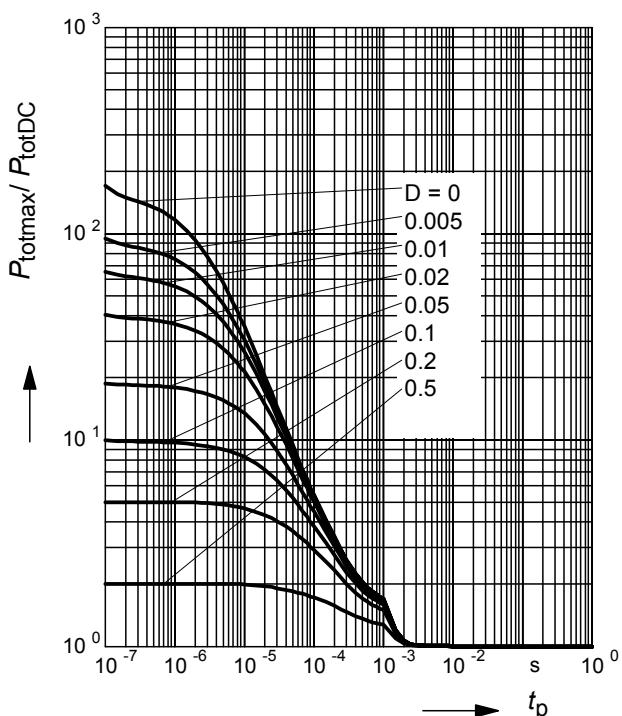


Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR164L3

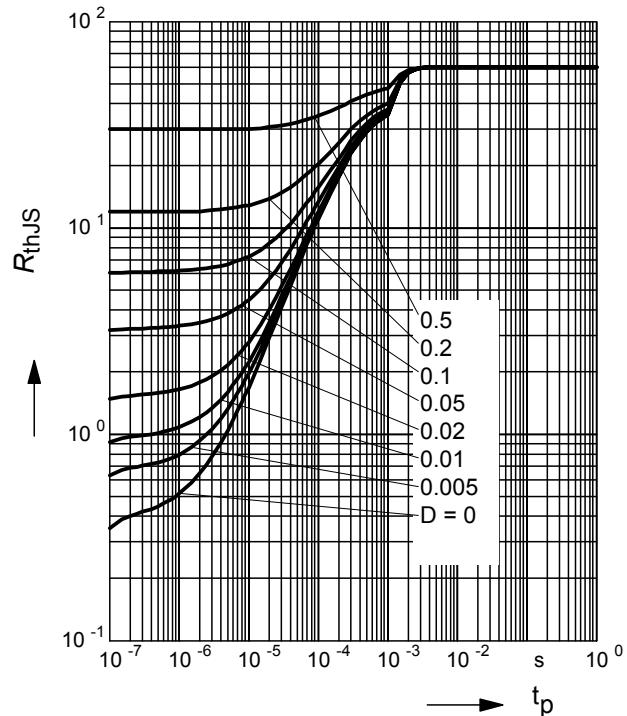

Permissible Puls Load $R_{\text{thJS}} = f(t_p)$

BCR164T

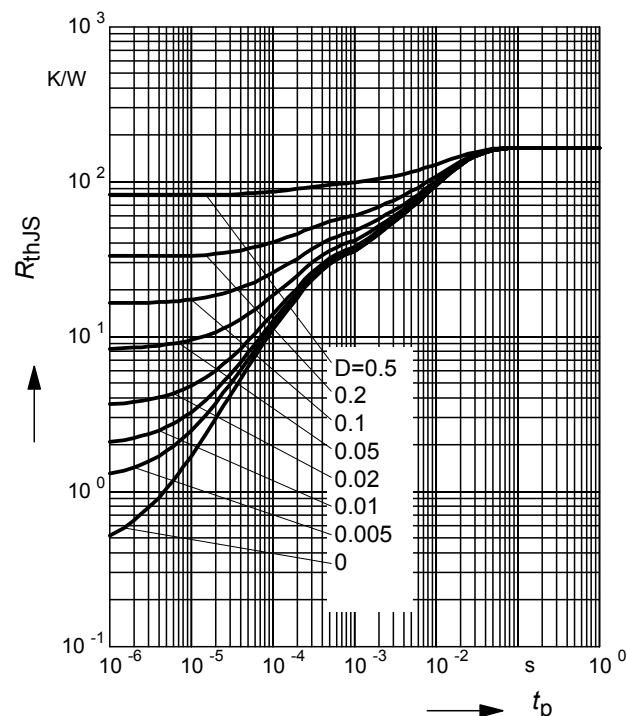

Permissible Pulse Load

$$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$$

BCR164T

