



查询LM385BDM-1.2供应商

LINFINITY

MICROELECTRONICS

THE INFINITE POWER OF INNOVATION

捷多邦, 专业PCB打样工厂, 24小时加急出货 **Doc #: 385**

LM385/385B

1.2 & 2.5V MICROPPOWER VOLTAGE REFERENCE

PRODUCTION DATA SHEET

DESCRIPTION

The LM385/385B Micropower Voltage References are two terminal bandgap reference diodes designed and optimized for accurate low power operation in portable and other power sensitive systems. Operating currents are guaranteed from as low as 15 μ A up to 20mA for the LM385/385B-1.2, and 20 μ A up to 20mA for the LM385/385B-2.5, giving designers a great deal of flexibility in optimizing power consumption, noise and ultimate application performance. As an added feature, the references output impedance is extraordinarily low over the entire operating range of quiescent currents. This enables an extremely wide dynamic load range with little effect on

the overall reference accuracy.

The LM385 family is available in fixed 1.2V and 2.5V reference values. Process and circuit design optimization provide for high accuracy with initial tolerance values of 1% for the LM385B-1.2, 2% for the LM385-1.2, 1.5% for the LM385B-2.5, and 3% for the LM385-2.5. Complementing their initial accuracy, the bandgap reference is temperature compensated to deliver 20ppm performance over the 0° to 70°C operating temperature range.

The LM385 family from Linfinity is a pin-for-pin replacement for the LM385/385B family of voltage references.

KEY FEATURES


- GUARANTEED 1% INITIAL ACCURACY (LM385B-1.2)
- GUARANTEED 2.5% INITIAL ACCURACY (LM385-1.2)
- GUARANTEED 1.5% INITIAL ACCURACY (LM385B-2.5)
- GUARANTEED 3% INITIAL ACCURACY (LM385-2.5)
- GUARANTEED 20 μ A OPERATING CURRENT
- LOW TEMPERATURE COEFFICIENT
- OPERATING CURRENT OF 20 μ A TO 20mA
- VERY LOW DYNAMIC IMPEDANCE . . . 1 Ω

APPLICATIONS


- PORTABLE METER REFERENCES
- PORTABLE TEST INSTRUMENTS
- BATTERY OPERATED SYSTEMS
- CURRENT LOOP INSTRUMENTATION

PRODUCT HIGHLIGHT

1.2V REFERENCE

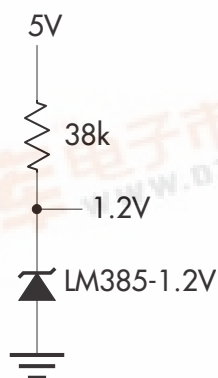

MICROPPOWER REFERENCE FROM 9V BATTERY

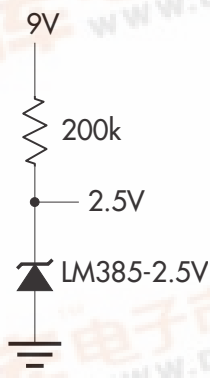

PACKAGE ORDER INFORMATION

T _A (°C)	Reference Voltage	Initial Tolerance	DM Plastic SOIC 8-pin	LP Plastic TO-92 3-pin
0 to 70	1.2V	±30mV	LM385DM-1.2	LM385LP-1.2
		±12mV	LM385BDM-1.2	LM385BLP-1.2
	2.5V	±75mV	LM385DM-2.5	LM385LP-2.5
		±38mV	LM385BDM-2.5	LM385BLP-2.5

Note: All surface-mount packages are available in Tape & Reel.
Append the letter "T" to part number. (i.e. LM385DM-2.5T)

FOR FURTHER INFORMATION CALL (714) 898-8121



LM385/385B

1.2 & 2.5V MICROPPOWER VOLTAGE REFERENCE

PRODUCTION DATA SHEET

ABSOLUTE MAXIMUM RATINGS (Note 1)

Reverse Breakdown Current	30mA
Forward Current	10mA
Operating Temperature Range	
LM385	0°C to 70°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (soldering, 10 seconds)	300°C

Note 1. Values beyond which damage may occur. All voltages are specified with respect to ground, and all currents are positive into the specified terminal

THERMAL DATA

DM PACKAGE:


THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA}	165°C/W
---	---------

LP PACKAGE:


THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA}	165°C/W
---	---------

The θ_{JA} numbers are guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

PACKAGE PIN OUTS



DM PACKAGE
(Top View)



LP PACKAGE
(Top View)

1.2 & 2.5V MICROPOWER VOLTAGE REFERENCE

PRODUCTION DATA SHEET

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, these specifications apply to $T_A = 25^\circ\text{C}$. Typ number represents $T_A = 25^\circ\text{C}$ value.)

LM385/385B-1.2

Parameter	Symbol	Test Conditions	LM385/385B-1.2			Units
			Min.	Typ.	Max.	
Reverse Breakdown Voltage	V_Z	$I_{MIN} \leq I_R \leq I_{MAX}$	1.205	1.235	1.260	V
		$I_{MIN} \leq I_R \leq I_{MAX}$	1.223	1.235	1.247	V
Average Temperature Coefficient	$\frac{\Delta V_Z}{\Delta \text{Temp}}$	$I_R = 100\mu\text{A}$		20		ppm/ $^\circ\text{C}$
Minimum Operating Current	I_{MIN}			8	15	μA
Reverse Breakdown Voltage Chang with Current	e ΔI_R	ΔV_Z $I_{MIN} \leq I_R \leq 1\text{mA}$			1.5	mV
		$1\text{mA} \leq I_R \leq 20\text{mA}$			20	mV
Reverse Dynamic Impedance	r_z	$I_R = 100\mu\text{A}$		1		Ω
Wide Band Noise (RMS)	e_n	$I_R = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		60		μV
Long Term Stability	$\frac{\Delta V_Z}{\Delta \text{Time}}$	$I_R = 100\mu\text{A}$, $T_A = 25^\circ\text{C} \pm 0.1^\circ\text{C}$		20		ppm/kHr

LM385/385B-2.5

Parameter	Symbol	Test Conditions	LM385/385B-2.5			Units
			Min.	Typ.	Max.	
Reverse Breakdown Voltage	V_Z	$I_{MIN} \leq I_R \leq I_{MAX}$	2.425	2.500	2.575	V
		$I_{MIN} \leq I_R \leq I_{MAX}$	2.462	2.500	2.538	V
Average Temperature Coefficient	$\frac{\Delta V_Z}{\Delta \text{Temp}}$	$I_R = 100\mu\text{A}$		20		ppm/ $^\circ\text{C}$
Minimum Operating Current	I_{MIN}			13	20	μA
Reverse Breakdown Voltage Chang with Current	e ΔI_R	ΔV_Z $I_{MIN} \leq I_R \leq 1\text{mA}$			2	mV
		$1\text{mA} \leq I_R \leq 20\text{mA}$			20	mV
Reverse Dynamic Impedance	r_z	$I_R = 100\mu\text{A}$, $f = 20\text{Hz}$		1		Ω
Wide Band Noise (RMS)	e_n	$I_R = 100\mu\text{A}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		120		μV
Long Term Stability	$\frac{\Delta V_Z}{\Delta \text{Time}}$	$I_R = 100\mu\text{A}$, $T_A = 25^\circ\text{C} \pm 0.1^\circ\text{C}$		20		ppm/kHr

GRAPH / CURVE INDEX

Characteristic Curves
LM385/385B-1.2

FIGURE

1. RESPONSE TIME
2. REVERSE CHARACTERISTICS
3. FORWARD CHARACTERISTICS
4. TEMPERATURE DRIFT
5. REVERSE VOLTAGE CHANGE
6. REVERSE DYNAMIC IMPEDANCE
7. NOISE VOLTAGE

Characteristic Curves
LM385/385B-2.5

FIGURE

8. RESPONSE TIME
9. REVERSE CHARACTERISTICS
10. FORWARD CHARACTERISTICS
11. TEMPERATURE DRIFT
12. REVERSE DYNAMIC IMPEDANCE
13. NOISE VOLTAGE

LM385/385B

1.2 & 2.5V MICROPOWER VOLTAGE REFERENCE

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES — LM385/385B-1.2V

FIGURE 1. — RESPONSE TIME

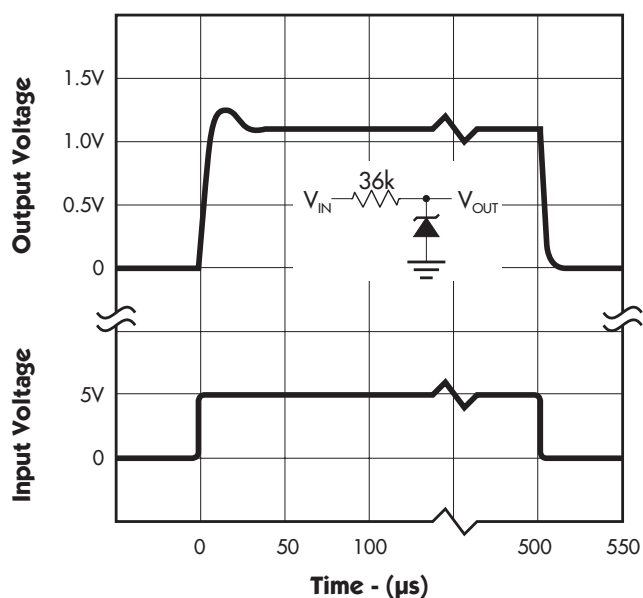


FIGURE 2. — REVERSE CHARACTERISTICS

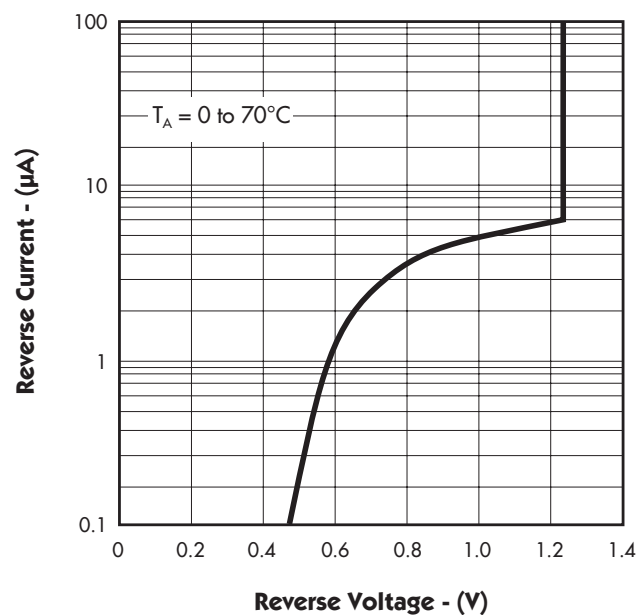


FIGURE 3. — FORWARD CHARACTERISTICS


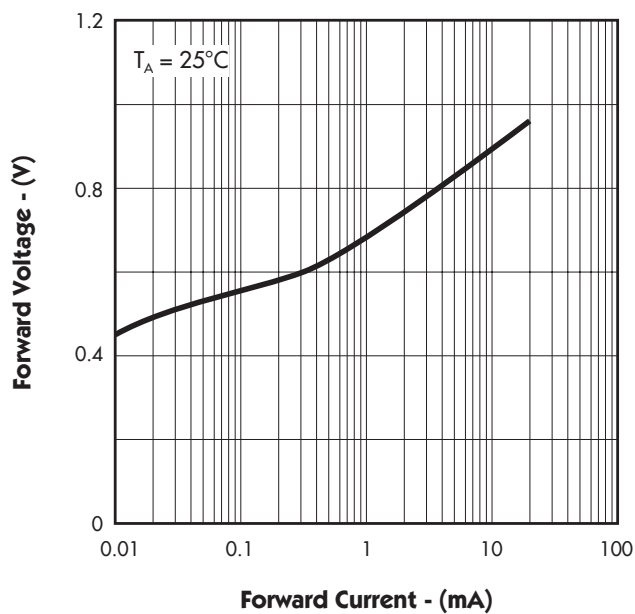


FIGURE 4. — TEMPERATURE DRIFT

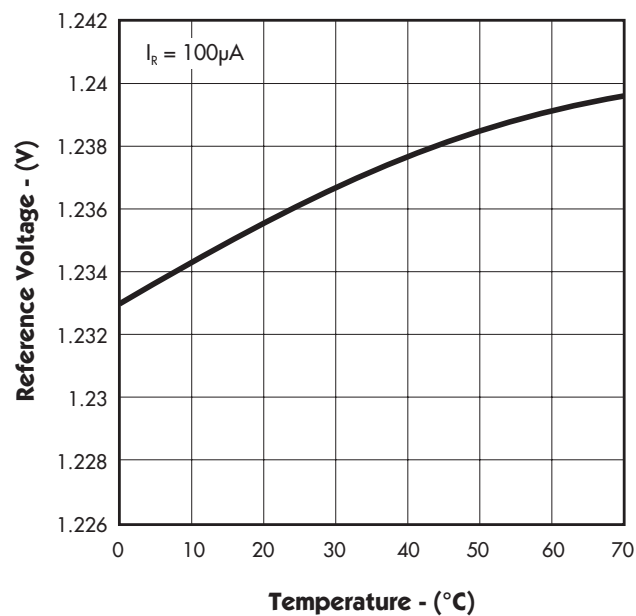

1.2 & 2.5V MICROPPOWER VOLTAGE REFERENCE

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES — LM385/385B-1.2V

FIGURE 5. — REVERSE VOLTAGE CHANGE

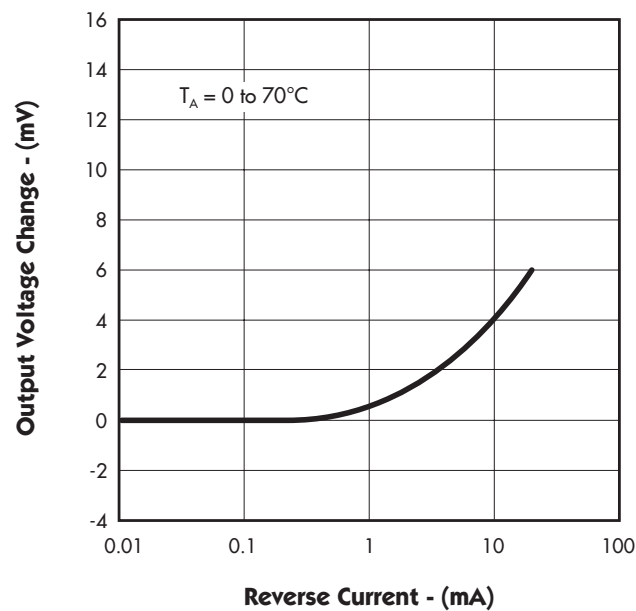


FIGURE 6. — REVERSE DYNAMIC IMPEDANCE


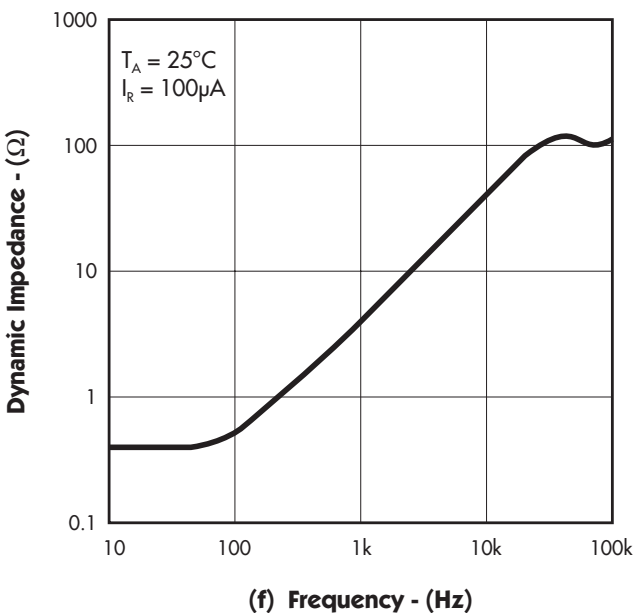


FIGURE 7. — NOISE VOLTAGE

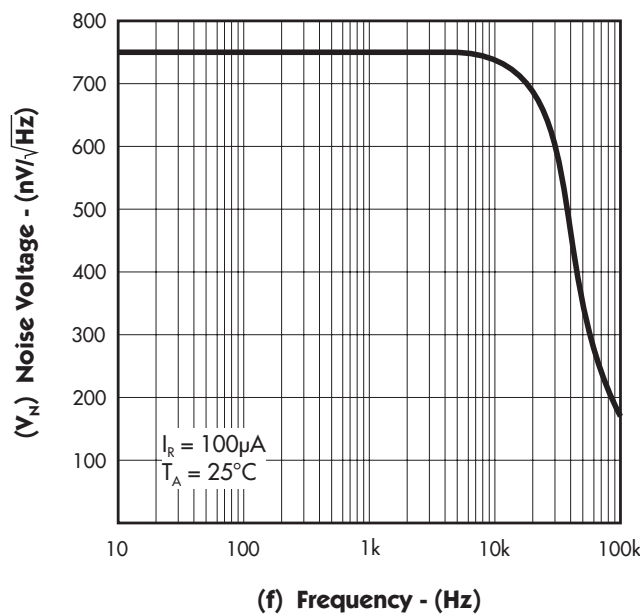

LM385/385B

1.2 & 2.5V MICROPOWER VOLTAGE REFERENCE

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES — LM385/385B-2.5V

FIGURE 8. — RESPONSE TIME

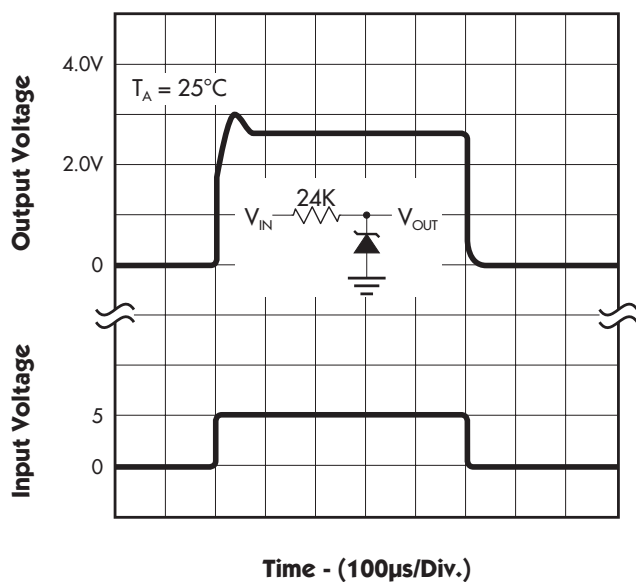


FIGURE 9. — REVERSE CHARACTERISTICS

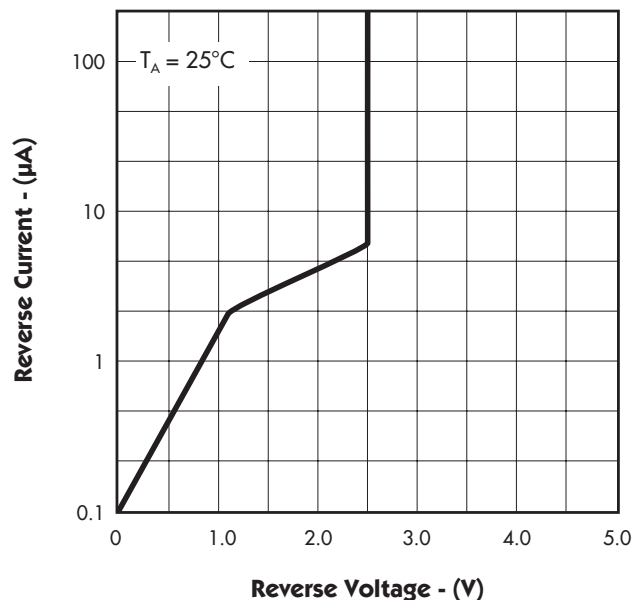


FIGURE 10. — FORWARD CHARACTERISTICS


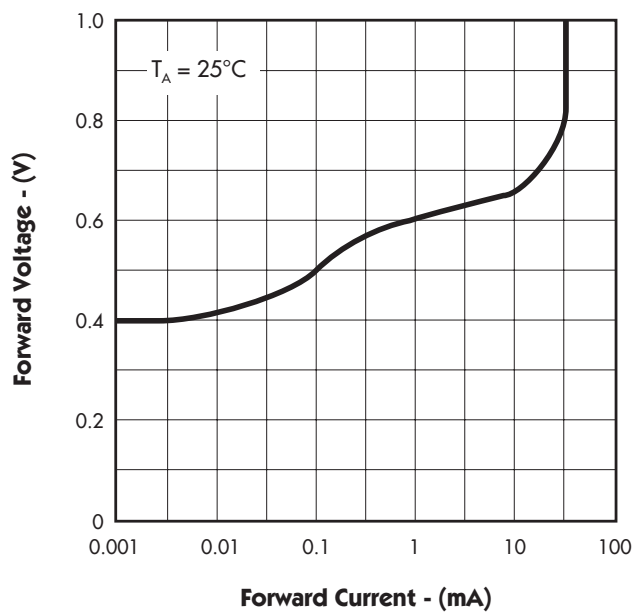


FIGURE 11. — TEMPERATURE DRIFT

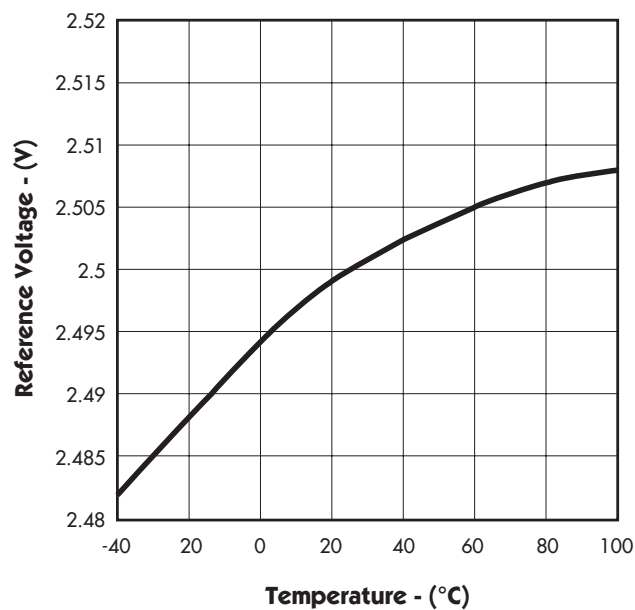

1.2 & 2.5V MICROPWR VOLTAGE REFERENCE

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES — LM385/385B-2.5V

FIGURE 12. — REVERSE DYNAMIC IMPEDANCE

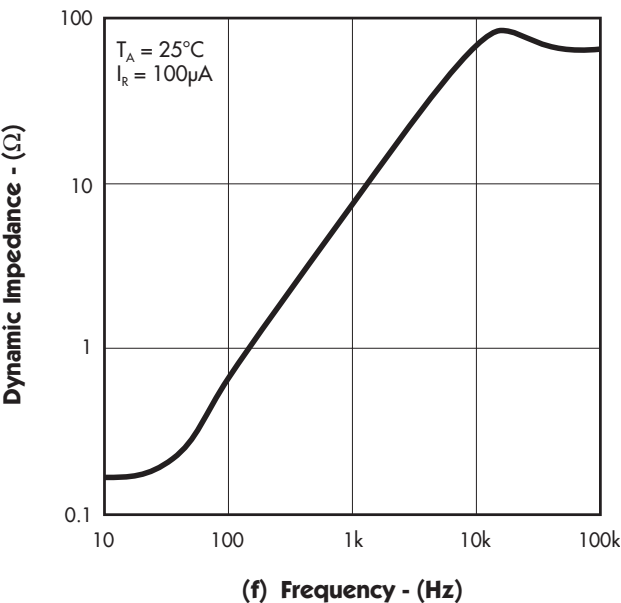


FIGURE 13. — NOISE VOLTAGE

