

查询BFT75供应商

捷多邦，专业PCB打样工厂，24小时加急出货

25C D ■ 8235605 0004713 5 ■ SIEG

T-31-17


NPN Silicon RF Broadband Transistor

BFT 75

SIEMENS AKTIENGESELLSCHAFT

BFT 75 is an epitaxial NPN silicon planar transistor in TO 236 plastic package (23A 3 DIN 41869), intended for use in low-noise input and intermediate stages in RF amplifiers up to the GHz range, especially for high Q antenna and broadband amplifiers in film circuits. The transistor is marked "KA".

Type	Mark	Ordering code
BFT 75	KA	Q62702-F513

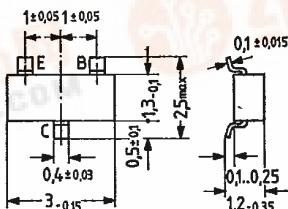

Approx. weight 0.02 g Dimensions in mm

Maximum ratings

Collector-emitter voltage	V_{CEO}	15	V
Collector-emitter voltage ($R_{BE} \leq 50 \Omega$)	V_{CER}	20	V
Collector-base voltage	V_{CBO}	20	V
Base-emitter voltage	V_{EBO}	2.5	V
Collector current	I_C	50	mA
Base current	I_B	10	mA
Storage temperature range	T_{stg}	-55 to +125	°C
Junction temperature	T_j	150	°C
Total power dissipation ($T_{amb} \leq 25^\circ\text{C}$)	P_{tot}	250	mW

Thermal resistance

Junction to ambient air	R_{thJA}	≤ 500	K/W
Junction to substrate back ¹⁾	R_{thJSB}	≤ 400	K/W

1) Ceramic substrate 0.7 mm; 2.5 cm² area

25C D ■ 8235605 0004714 7 ■ SIEG

25C 04714 D ~~T-31-17~~

BFT 75

SIEMENS AKTIENGESELLSCHAFT

Static characteristics ($T_{amb} = 25^\circ C$)

Collector cutoff current ($V_{CB} = 10 V$ ($V_{CB} = 10 V$; $T_{amb} = 60^\circ C$))	I_{CBO}	≤ 50	nA
Collector cutoff current ($V_{CE} = 20 V$; $V_{BE} = 0$)	I_{CBO}	≤ 0.5	μA
Emitter cutoff current ($V_{EB} = 2 V$)	I_{CES}	≤ 100	μA
DC current gain ($I_C = 25 mA$; $V_{CE} = 8 V$)	I_{EBO}	≤ 10	μA
($I_C = 50 mA$; $V_{CE} = 5 V$)	h_{FE}	≥ 30	-
	h_{FE}	≥ 30	-

Dynamic characteristics ($T_{amb} = 25^\circ C$)

Small signal current gain ($I_C = 25 mA$; $V_{CE} = 8 V$; $f = 1 kHz$)	h_{fe}	80	-
Transition frequency ($I_C = 25 mA$; $V_{CE} = 8 V$; $f = 200 MHz$)	f_T	5	GHz
($I_C = 50 mA$; $V_{CE} = 5 V$; $f = 200 MHz$)	f_T	4.5	GHz
Output capacitance ($V_{CB} = 8 V$; $I_E = 0$)	C_{ob}	0.8	pF
Input capacitance ($V_{EB} = 0.5 V$; $I_E = 0$)	C_{ib}	2.1	pF
Reverse transfer capacitance ($I_C = 1 mA$; $V_{CE} = 8 V$)	C_{12e}	0.65	pF
Noise figure ($I_C = 10 mA$; $V_{CE} = 8 V$; $f = 800 MHz$; $R_g = 60 \Omega$)	NF	2.8	dB
($I_C = 3 mA$; $V_{CE} = 8 V$; $f = 500 MHz$; R_{gopt})	NF_{opt}	1.9	dB
Power gain ($I_C = 25 mA$; $V_{CE} = 8 V$; $f = 800 MHz$, $R_g = 60 \Omega$)	G_{pe}	12	dB
Output voltage ¹⁾ ($I_C = 25 mA$; $V_{CE} = 8 V$; $d_{IM} = 60 dB$; $R_L = R_g = 75 \Omega$)	V_0	350	mV

1) Three tone modulation f approx. 800 MHz

25C D ■ 8235605 0004715 9 ■ SIEG

25C 04715 D T-31-17

BFT 75


SIEMENS AKTIENGESELLSCHAFT

S parameter:Operating point: $V_{CE} = 5$ V; $I_C = 30$ mA, $Z_o = 50 \Omega$

f (GHz)	S_{11e}	φ	S_{21e}	φ	S_{12e}	φ	S_{22e}	φ
0,1	0,316	-110	25,317	115	0,021	68	0,575	-38
0,2	0,260	-141	14,120	99	0,036	69	0,386	-32
0,3	0,262	-164	9,469	90	0,051	71	0,305	-37
0,4	0,246	-166	7,250	84	0,067	70	0,332	-31
0,5	0,241	176	5,848	80	0,082	70	0,278	-31
0,6	0,251	178	4,855	76	0,096	69	0,304	-37
0,7	0,227	167	4,253	72	0,112	68	0,314	-27
0,8	0,246	166	3,673	67	0,126	66	0,247	-31
0,9	0,217	159	3,346	64	0,143	64	0,278	-44
1,0	0,266	150	3,008	61	0,156	63	0,322	-37
1,1	0,241	155	2,782	57	0,171	62	0,254	-35
1,2	0,249	139	2,540	54	0,185	60	0,281	-49
1,3	0,262	139	2,365	50	0,199	57	0,291	-46
1,4	0,282	131	2,221	47	0,215	55	0,246	-50
1,5	0,277	134	2,120	44	0,229	54	0,312	-62
1,6	0,283	122	1,992	40	0,238	52	0,308	-49
1,7	0,327	121	1,863	38	0,251	51	0,181	-54
1,8	0,311	122	1,737	33	0,259	48	0,286	-92
1,9	0,312	114	1,719	30	0,281	45	0,361	-68
2,0	0,330	112	1,662	29	0,295	44	0,251	-56

Total perm. power dissipation
versus temperature

mW $P_{tot} = f(T_{amb})$

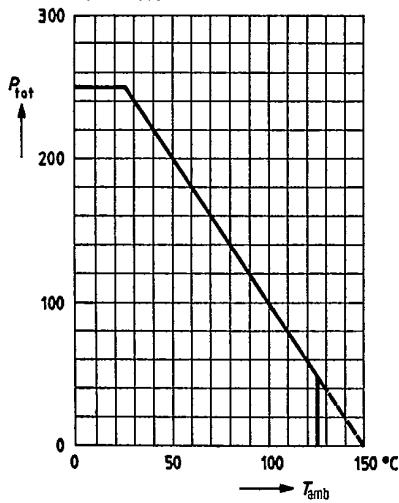

2092

C-01

761