




**ELECTRONIC LAMP BALLASTS RECTIFIER**  
**Reverse Voltage - 1100 Volts**  
**Forward Current - 1.0 Ampere**

**Features**

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:  
 250°C/10 seconds, 0.375" (9.5mm) lead length,  
 5 lbs. (2.3Kg) tension

**DO-41**

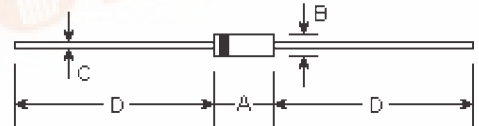

**Mechanical Data**

- **Case:** DO-41 molded plastic body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.012 ounce, 0.33 gram

DIM	DIMENSIONS				Note
	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.165	0.205	4.2	5.2	
B	0.079	0.106	2.0	2.7	ϕ
C	0.028	0.034	0.71	0.86	ϕ
D	1.000	-	25.40	-	

**Maximum Ratings and Electrical Characteristics**


Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	BHT18	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	1100	Volts
Maximum RMS voltage	$V_{RMS}$	770	Volts
Maximum DC blocking voltage	$V_{DC}$	1100	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0	Amp
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method)	$I_{FSM}$	30.0	Amps
Maximum instantaneous forward voltage at 1.0A	$V_F$	1.0	Volts
Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{R(AV)}$	30.0	$\mu\text{A}$
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	$I_R$	1.0 30.0	$\mu\text{A}$
Typical reverse recovery time (Note 1)	$T_{rr}$	30.0	$\mu\text{S}$
Typical junction capacitance (Note 2)	$C_J$	15.0	$\mu\text{F}$
Typical thermal resistance (Note 3)	$R_{\theta JA}$ $R_{\theta JL}$	50.0 25.0	$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-50 to +175	$^\circ\text{C}$

Notes:

(1) Measured on Tektronix Type "S" recovery plug-in. Tektronix 545 Scope or equivalent,  $I_{FM}=20\text{mA}$ ,  $I_{RM}=1\text{mA}$

(2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts



# RATINGS AND CHARACTERISTIC CURVES

