

查询BPX90供应商

捷多邦，专业PCB打样工厂，24小时加急出货



SIEMENS AKTIENGESELLSCHAFT 47E ■ 8235605 0027440 ■ SIEG

SIEMENS

BPX 90

WITH DAYLIGHT FILTER BPX 90K  
PLANAR SILICON PHOTODIODE

T-41-53

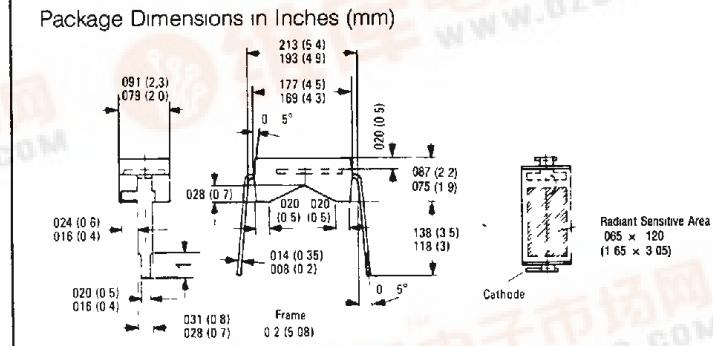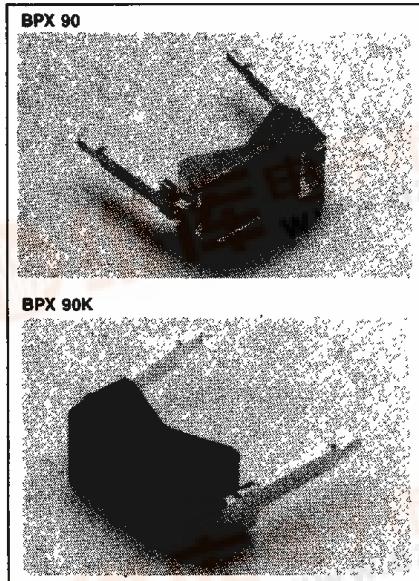

#### Characteristics ( $T_{amb} = 25^\circ C$ )

	Symbol	BPX90	BPX90K	Unit
Photosensitivity ( $V_R = 5 V$ , Note 1) ( $V_R = 5 V$ , $\lambda=950 \text{ nm}$ $E_e = 0.5 \text{ mW/cm}^2$ )	S	45 ( $\geq 25$ ) —	13 ( $\geq 8$ )	nA/lx $\mu\text{A}$
Wavelength of Max Photosensitivity	$\lambda_{Smax}$	850	950	nm
Spectral Range of Photosensitivity ( $S = 10\%$ of $S_{max}$ )	$\lambda$	400 1100 5 5	800 1150 5	nm $\text{mm}^2$
Radiant Sensitive Area	A			
Dimensions of the Radiant Sensitive Area	L x W	1.75 x 3.15	1.65 x 3.05	mm
Distance Between Chip Surface and Package Surface	H	0.5	0.5	mm
Half Angle	$\varphi$	$\pm 60$	$\pm 60$	Deg
Dark Current ( $V_R = 10 V$ )	$I_D$	5 ( $\leq 200$ )	5 ( $\leq 200$ )	nA
Spectral Photosensitivity ( $\lambda = 850 \text{ nm}$ )	$S_\lambda$	0.50	0.48	A/W
Quantum Efficiency ( $\lambda = 850 \text{ nm}$ )	$\eta$	0.73	0.62	Electrons Photon
Open Circuit Voltage ( $E_e = 0.5 \text{ mW/cm}^2$ $\lambda = 950 \text{ nm}$ )	$V_O$	450 ( $\geq 380$ )	400 ( $\geq 340$ )	mV
Short Circuit Current ( $E_e = 0.5 \text{ mW/cm}^2$ $\lambda = 950 \text{ nm}$ )	$I_{SC}$	45 ( $\geq 25$ )	13 ( $\geq 8$ )	$\mu\text{A}$
Rise and Fall Time of the Photocurrent from 10% to 90% and from 90% to 10% of the Final Value	$t_r$ $t_f$	1.3	1.3	$\mu\text{sec}$
( $R_L = 1 \text{ k}\Omega$ , $V_R = 5 V$ , $\lambda = 830 \text{ nm}$ , $I_p = 45 \mu\text{A}/BPX90$ , $I_p = 30 \mu\text{A}/BPX90K$ )				
Forward Voltage ( $I_F = 100 \text{ mA}$ , $E_e = 0$ $T_{amb} = 25^\circ C$ )	$V_F$	1.3	1.3	V
Capacitance ( $V_R = 0 V$ , $f = 1 \text{ MHz}$ $E_V = 0 \text{ lx}$ )	$C_O$	430	430	pF
( $V_R = 10 V$ , $f = 1 \text{ MHz}$ $E_V = 0 \text{ lx}$ )	$C_{10}$	100	100	pF
Temperature Coefficient $V_O$	$TC_V$	-2.6	-2.6	mV/K
Temperature Coefficient $I_S$	$TC_I$	0.18	0.18	%/K
Noise Equivalent Power ( $V_R = 1 V$ )	NEP	$8 \times 10^{-14}$	$8 \times 10^{-14}$	$\frac{\text{W}}{\sqrt{\text{Hz}}}$
Detection Limit ( $V_R = 1 V$ )	D	$2.9 \times 10^{12}$	$2.9 \times 10^{12}$	$\frac{\text{cm} \sqrt{\text{Hz}}}{\text{W}}$

Photodiodes

#### FEATURES

- Transparent Plastic Package – BPX 90
- Daylight Filter – BPX 90K
- Silicon Planar Photodiode
- 0.2" Lead Spacing
- High Sensitivity, BPX 90: 45 nA/lx;  
BPX 90K: 13 nA/lx
- Lead Bend Option (for SMD)

#### DESCRIPTION

The BPX90 and BPX90K are planar silicon photodiodes. The BPX90 is in a transparent plastic package. The BPX90K is in a black plastic package with IR filter. Its terminals are soldering tabs arranged in 0.2" (5.08 mm) lead spacing. Due to its design, the diode can be easily assembled on PC boards. The flat back of the epoxy resin case makes rigid fixing of the component feasible. Arrays can be realized by multiple arrangements.

This versatile photodetector is suitable for diode as well as voltaic cell operation. The signal/noise ratio is particularly favorable, even at low illuminances. The open circuit voltage at low illuminances is higher than with comparable mesa photovoltaic cells.

#### Maximum Ratings

Reverse Voltage ( $V_R$ )	32 V
Operating and Storage Temperature Range	-40 to +80°C
Soldering Temperature in a 2 mm Distance from the Case Bottom ( $t \leq 3 \text{ s}$ ) ( $T_S$ )	230°C
Power Dissipation ( $P_{tot}$ )	100 mW

<sup>1</sup>The illuminance indicated refers to unfiltered radiation of a tungsten-filament lamp at a color temperature of 2856 K (Standard light A in accordance with DIN 5033 and IEC publ. 306 1).

