

## Smart Two Channel Highside Power Switch


### Features

- Overload protection
- Current limitation
- Short circuit protection
- Thermal shutdown
- Overvoltage protection (including load dump)
- Reverse battery protection<sup>1)</sup>
- Undervoltage and overvoltage shutdown with auto-restart and hysteresis
- Open drain diagnostic output
- Open load detection in ON-state
- CMOS compatible input
- Loss of ground and loss of  $V_{bb}$  protection
- Electrostatic discharge (ESD) protection

### Product Summary

Overvoltage protection	$V_{bb(AZ)}$	43	V
Operating voltage	$V_{bb(on)}$	5.0 ... 24	V
	channels:	each	both parallel
On-state resistance	$R_{ON}$	100	50 mΩ
Load current (ISO)	$I_{L(ISO)}$	4.4	8.5 A
Current limitation	$I_{L(SCR)}$	10	10 A

TO-220AB/7

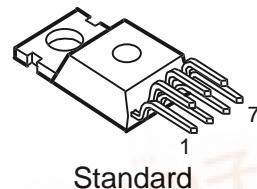


Standard

### Application

- μC compatible power switch with diagnostic feedback for 12 V DC grounded loads
- Most suitable for resistive and lamp loads

### General Description

N channel vertical power FET with charge pump, ground referenced CMOS compatible input and diagnostic feedback, monolithically integrated in Smart SIPMOS® technology. Fully protected by embedded protection functions.

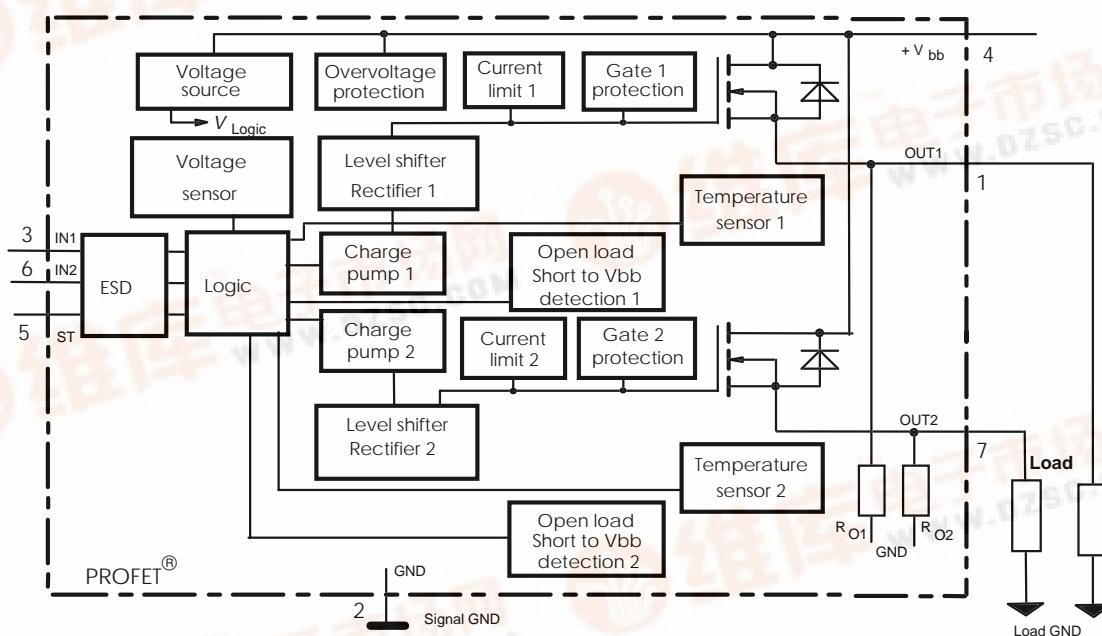

Pin	Symbol	Function
1	OUT1 (Load, L)	Output 1, protected high-side power output of channel 1
2	GND	Logic ground
3	IN1	Input 1, activates channel 1 in case of logical high signal
4	V <sub>bb</sub>	Positive power supply voltage, the tab is shorted to this pin
5	ST	Diagnostic feedback: open drain, low on failure
6	IN2	Input 2, activates channel 2 in case of logical high signal
7	OUT2 (Load, L)	Output 2, protected high-side power output of channel 2

**Maximum Ratings** at  $T_j = 25^\circ\text{C}$  unless otherwise specified

Parameter	Symbol	Values	Unit
Supply voltage (overvoltage protection see page 3)	$V_{bb}$	43	V
Supply voltage for full short circuit protection $T_{j\text{ Start}}=-40 \dots +150^\circ\text{C}$	$V_{bb}$	24	V
Load dump protection <sup>2)</sup> $V_{\text{Load Dump}} = U_A + V_s$ , $U_A = 13.5 \text{ V}$ $R_l^{(3)} = 2 \Omega$ , $R_L = 2.7 \Omega$ , $t_d = 200 \text{ ms}$ , IN= low or high	$V_{\text{Load dump}}^{(4)}$	60	V
Load current (Short circuit current, see page 4)	$I_L$	self-limited	A
Operating temperature range	$T_j$	-40 ...+150	$^\circ\text{C}$
Storage temperature range	$T_{\text{stg}}$	-55 ...+150	
Power dissipation (DC), $T_C \leq 25^\circ\text{C}$	$P_{\text{tot}}$	75	W
Electrostatic discharge capability (ESD) (Human Body Model) acc. MIL-STD883D, method 3015.7 and ESD assn. std. S5.1-1993	$V_{\text{ESD}}$ IN: all other pins:	1.0 2.0	kV
Input voltage (DC)	$V_{\text{IN}}$	-10 ... +16	V
Current through input pin (DC)	$I_{\text{IN}}$	$\pm 2.0$	mA
Current through status pin (DC) see internal circuit diagrams page 6	$I_{\text{ST}}$	$\pm 5.0$	

### Thermal Characteristics

Parameter and Conditions	Symbol	Values			Unit
		min	typ	max	
Thermal resistance chip - case, both channels: each channel: junction - ambient (free air):	$R_{\text{thJC}}$	-- -- --	-- -- --	1.7 3.4 75	K/W
	$R_{\text{thJA}}$				

2) Supply voltages higher than  $V_{bb(AZ)}$  require an external current limit for the GND and status pins, e.g. with a  $150 \Omega$  resistor in the GND connection and a  $15 \text{ k}\Omega$  resistor in series with the status pin. A resistor for the protection of the input is integrated.

3)  $R_l$  = internal resistance of the load dump test pulse generator

4)  $V_{\text{Load dump}}$  is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839

### Electrical Characteristics

Parameter and Conditions, each channel at $T_j = 25^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	

### Load Switching Capabilities and Characteristics

On-state resistance (pin 4 to 1 or 7) $I_L = 2\text{ A}$ each channel	$T_j = 25^\circ\text{C}$ : $T_j = 150^\circ\text{C}$ :	$R_{ON}$	--	80 160	100 200	$\text{m}\Omega$
Nominal load current, ISO Norm (pin 4 to 1 or 7) $V_{ON} = 0.5\text{ V}$ , $T_C = 85^\circ\text{C}$	each channel: both channels parallel:	$I_{L(\text{ISO})}$	3.5 6.8	4.4 8.5	-- --	A
Output current (pin 1 or 7) while GND disconnected or GND pulled up, $V_{bb}=30\text{ V}$ , $V_{IN}=0$ , see diagram page 7		$I_{L(\text{GNDhigh})}$	--	--	10	mA
Turn-on time	IN $\sqcap$ to 90% $V_{OUT}$ :	$t_{on}$	80	200	400	$\mu\text{s}$
Turn-off time	IN $\sqcup$ to 10% $V_{OUT}$ :	$t_{off}$	80	200	400	
$R_L = 12\text{ }\Omega$ , $T_j = -40...+150^\circ\text{C}$						
Slew rate on 10 to 30% $V_{OUT}$ , $R_L = 12\text{ }\Omega$ , $T_j = -40...+150^\circ\text{C}$		$dV/dt_{on}$	0.1	--	1	$\text{V}/\mu\text{s}$
Slew rate off 70 to 40% $V_{OUT}$ , $R_L = 12\text{ }\Omega$ , $T_j = -40...+150^\circ\text{C}$		$-dV/dt_{off}$	0.1	--	1	$\text{V}/\mu\text{s}$

### Operating Parameters

Operating voltage <sup>5)</sup>	$T_j = -40...+150^\circ\text{C}$ :	$V_{bb(\text{on})}$	5.0	--	34	V
Operating voltage <sup>6)</sup>	$T_j = -40...+150^\circ\text{C}$ :	$V_{bb(\text{on})}$	5.0	--	24	V
Undervoltage shutdown	$T_j = -40...+150^\circ\text{C}$ :	$V_{bb(\text{under})}$	3.5	--	5.0	V
Undervoltage restart	$T_j = -40...+25^\circ\text{C}$ : $T_j = +150^\circ\text{C}$ :	$V_{bb(\text{u rst})}$	--	--	5.0 7.0	V
Undervoltage restart of charge pump see diagram page 10	$T_j = -40...+150^\circ\text{C}$ :	$V_{bb(\text{ucp})}$	--	5.6	7.0	V
Undervoltage hysteresis $\Delta V_{bb(\text{under})} = V_{bb(\text{u rst})} - V_{bb(\text{under})}$		$\Delta V_{bb(\text{under})}$	--	0.2	--	V
Oversupply shutdown	$T_j = -40...+150^\circ\text{C}$ :	$V_{bb(\text{over})}$	24	--	34	V
Oversupply restart	$T_j = -40...+150^\circ\text{C}$ :	$V_{bb(\text{o rst})}$	23	--	--	V
Oversupply hysteresis	$T_j = -40...+150^\circ\text{C}$ :	$\Delta V_{bb(\text{over})}$	--	0.5	--	V
Oversupply protection <sup>7)</sup>	$T_j = -40...+150^\circ\text{C}$ : $I_{bb} = 40\text{ mA}$	$V_{bb(\text{AZ})}$	42	47	--	V
Standby current (pin 4)						
$V_{IN}=0$	$T_j = -40...+25^\circ\text{C}$ : $T_j = 150^\circ\text{C}$ :	$I_{bb(\text{off})}$	--	14 17	30 35	$\mu\text{A}$

<sup>5)</sup> At supply voltage increase up to  $V_{bb} = 5.6\text{ V}$  typ without charge pump,  $V_{OUT} \approx V_{bb} - 2\text{ V}$

<sup>6)</sup> At supply voltage increase up to  $V_{bb} = 5.6\text{ V}$  typ without charge pump,  $V_{OUT} \approx V_{bb} - 2\text{ V}$

<sup>7)</sup> See also  $V_{ON(CL)}$  in table of protection functions and circuit diagram page 7.

Parameter and Conditions, each channel at $T_j = 25^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	
Leakage output current (included in $I_{bb(\text{off})}$ ) $V_{IN}=0$	$I_{L(\text{off})}$	--	--	12	$\mu\text{A}$
Operating current (Pin 2) <sup>8)</sup> , $V_{IN}=5\text{ V}$ both channels on, $T_j = -40\ldots+150^\circ\text{C}$	$I_{GND}$	--	4	6	$\text{mA}$
Operating current (Pin 2) <sup>8)</sup> one channel on, $T_j = -40\ldots+150^\circ\text{C}$ :	$I_{GND}$	--	2	3	$\text{mA}$

### Protection Functions

Initial peak short circuit current limit (pin 4 to 1 or 7)	$I_{L(\text{SCp})}$				
$T_j = -40^\circ\text{C}$ : $T_j = 25^\circ\text{C}$ : $T_j = +150^\circ\text{C}$ :		16 12 7	22 18 11	28 24 15	A
Repetitive short circuit shutdown current limit $T_j = T_{jt}$ (see timing diagrams, page 9)	$I_{L(\text{SCR})}$	--	10	--	A
Thermal overload trip temperature	$T_{jt}$	150	--	--	$^\circ\text{C}$
Thermal hysteresis	$\Delta T_{jt}$	--	10	--	K
Reverse battery (pin 4 to 2) <sup>9)</sup>	$-V_{bb}$	--	--	32	V
Reverse battery voltage drop ( $V_{out} > V_{bb}$ ) $I_L = -2.9\text{ A}$ , each channel	$T_j=150^\circ\text{C}$ : $-V_{ON(\text{rev})}$	--	610	--	$\text{mV}$

### Diagnostic Characteristics

Open load detection current (on-condition, )	$T_j=-40^\circ\text{C}$ : $T_j=25^\circ\text{C}$ : $T_j=150^\circ\text{C}$ :	$I_{L(\text{OL})}$	800 800 550	-- -- --	1450 1300 1200	mA
Open load detection voltage <sup>10)</sup> (off-condition)	$T_j=-40..150^\circ\text{C}$ :	$V_{OUT(\text{OL})}$	2	3	4	V
Internal output pull down (pin 1 or 7 to 2), $V_{OUT}=5\text{ V}$ , $T_j=-40..150^\circ\text{C}$		$R_O$	4	10	30	$\text{k}\Omega$

8) Add  $I_{ST}$ , if  $I_{ST} > 0$ , add  $I_{IN}$ , if  $V_{IN} > 5.5\text{ V}$

9) Requires 150  $\Omega$  resistor in GND connection. The reverse load current through the intrinsic drain-source diode has to be limited by the connected load. Note that the power dissipation is higher compared to normal operating conditions due to the voltage drop across the intrinsic drain-source diode. The temperature protection is not active during reverse current operation! Input and Status currents have to be limited (see max. ratings page 2 and circuit page 7).

10) External pull up resistor required for open load detection in off state.

Parameter and Conditions, each channel at $T_j = 25^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified	Symbol	Values			Unit
		min	typ	max	

### Input and Status Feedback<sup>11)</sup>

Input resistance $T_j = -40..150^\circ\text{C}$ , see circuit page 6	$R_I$	2.5	3.5	6	$\text{k}\Omega$
Input turn-on threshold voltage  $T_j = -40..+150^\circ\text{C}$ :	$V_{IN(T+)}$	1.7	--	3.5	$\text{V}$
Input turn-off threshold voltage  $T_j = -40..+150^\circ\text{C}$ :	$V_{IN(T-)}$	1.5	--	--	$\text{V}$
Input threshold hysteresis	$\Delta V_{IN(T)}$	--	0.5	--	$\text{V}$
Off state input current (pin 3 or 6), $V_{IN} = 0.4\text{ V}$ , $T_j = -40..+150^\circ\text{C}$	$I_{IN(off)}$	1	--	50	$\mu\text{A}$
On state input current (pin 3 or 6), $V_{IN} = 3.5\text{ V}$ , $T_j = -40..+150^\circ\text{C}$	$I_{IN(on)}$	20	50	90	$\mu\text{A}$
Delay time for status with open load after switch off (other channel in off state) (see timing diagrams, page 10), $T_j = -40..+150^\circ\text{C}$	$t_{d(ST OL4)}$	100	320	800	$\mu\text{s}$
Delay time for status with open load after switch off (other channel in on state) (see timing diagrams, page 10), $T_j = -40..+150^\circ\text{C}$	$t_{d(ST OL5)}$	--	5	20	$\mu\text{s}$
Status invalid after positive input slope (open load) $T_j = -40 \dots +150^\circ\text{C}$ :	$t_{d(ST)}$	--	200	600	$\mu\text{s}$
Status output (open drain)					
Zener limit voltage $T_j = -40\dots+150^\circ\text{C}$ , $I_{ST} = +1.6\text{ mA}$ : ST low voltage $T_j = -40\dots+25^\circ\text{C}$ , $I_{ST} = +1.6\text{ mA}$ : $T_j = +150^\circ\text{C}$ , $I_{ST} = +1.6\text{ mA}$ :	$V_{ST(\text{high})}$ $V_{ST(\text{low})}$	5.4 --	6.1 --	-- 0.4	$\text{V}$
		--	--	0.6	

<sup>11)</sup> If a ground resistor  $R_{GND}$  is used, add the voltage drop across this resistor.

### Truth Table

	IN1	IN2	OUT1	OUT2	ST BTS620L1 BTS621L1
<b>Normal operation</b>	L	L	L	L	H
	L	H	L	H	H
	H	L	H	L	H
	H	H	H	H	H
<b>Open load</b>	Channel 1	L	L	Z	L
	L	H	Z	H	H(L <sup>12</sup> )
	H	X	H	X	L
	Channel 2	L	L	L	Z
	H	L	H	Z	H(L <sup>12</sup> )
	X	H	X	H	L
<b>Short circuit to V<sub>bb</sub></b>	Channel 1	L	L	H	L
	L	H	H	H	H
	H	X	H	X	H(L <sup>14</sup> )
	Channel 2	L	L	L	H
	H	L	H	H	H
	X	H	X	H	H(L <sup>14</sup> )
<b>Overtemperature</b>	both channel	L	L	L	H
	X	H	L	L	L
	H	X	L	L	L
	Channel 1	L	X	L	X
	H	X	L	X	L
	Channel 2	X	L	X	L
	X	H	X	L	H
<b>Undervoltage/ Overvoltage</b>		X	X	L	L
					H

L = "Low" Level


X = don't care

Z = high impedance, potential depends on external circuit


H = "High" Level

Status signal after the time delay shown in the diagrams (see fig 5. page 10)

### Terms

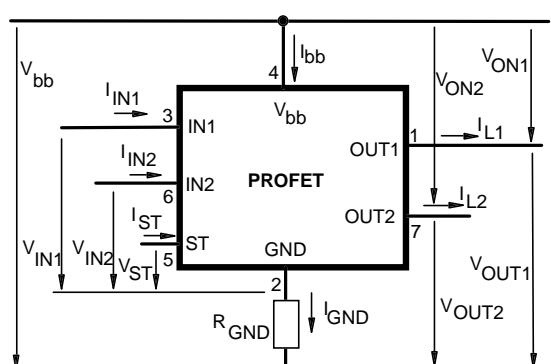

### Input circuit (ESD protection)

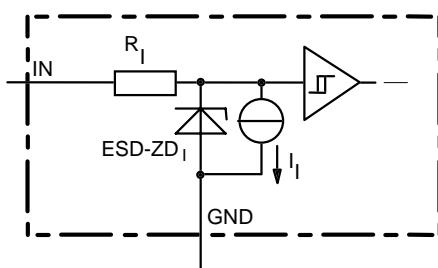


ESD zener diodes are not to be used as voltage clamp at DC conditions. Operation in this mode may result in a drift of the zener voltage (increase of up to 1 V).

12) With additional external pull up resistor

13) An external short of output to  $V_{bb}$ , in the off state, causes an internal current from output to ground. If  $R_{GND}$  is used, an offset voltage at the GND and ST pins will occur and the  $V_{ST\ low}$  signal may be errorious.


14) Low resistance to  $V_{bb}$  may be detected in the ON-state by the no-load-detection

### Status output

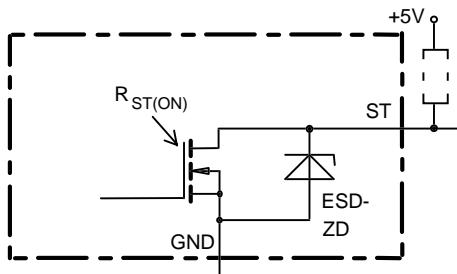


ESD-Zener diode: 6.1 V typ., max 5 mA;  
 $R_{ST(ON)} < 380 \Omega$  at 1.6 mA, ESD zener diodes are not to be used as voltage clamp at DC conditions.  
 Operation in this mode may result in a drift of the zener voltage (increase of up to 1 V).

### overvoltage output clamp

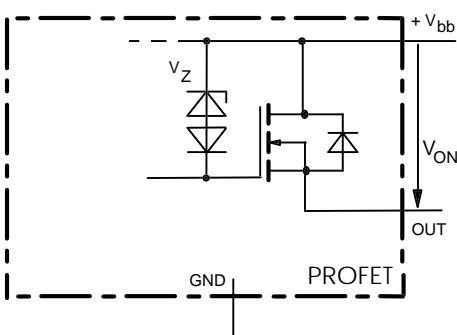

$V_{ON}$  clamped to 47 V typ.


### Overvolt. and reverse batt. protection

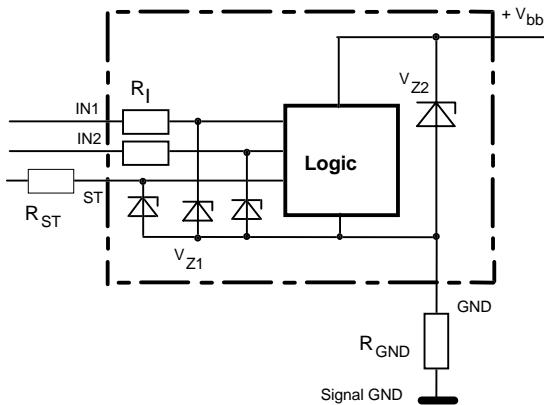


$V_{Z1} = 6.1$  V typ.,  $V_{Z2} = 47$  V typ.,  $R_j = 3.5$  k $\Omega$  typ,  
 $R_{GND} = 150$   $\Omega$

### Open-load detection


ON-state diagnostic condition:  $V_{ON} < R_{ON} * I_{L(OL)}$ ; IN high

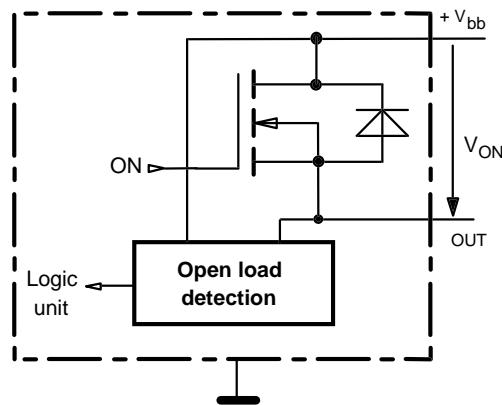

OFF-state diagnostic condition:  $V_{OUT} > 3$  V typ.; IN low

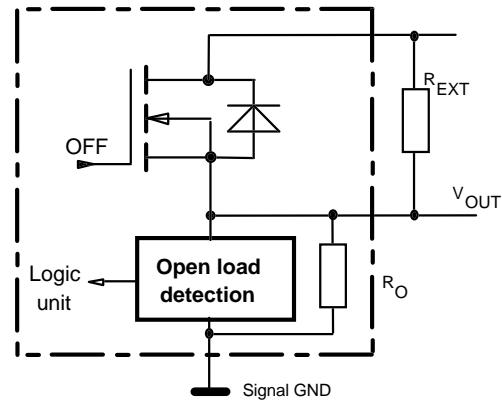


### GND disconnect

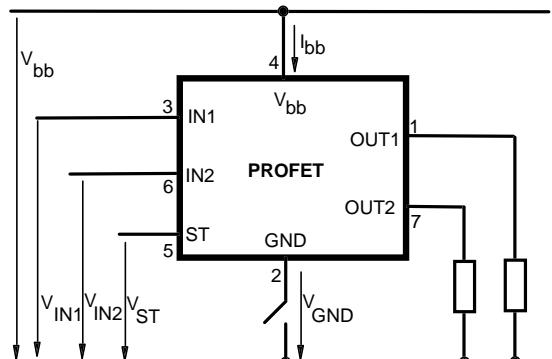

In case of Input=high is  $V_{OUT} \approx V_{IN} - V_{IN(T+)}$ .

Due to  $V_{GND} > 0$ , no  $V_{ST} = \text{low}$  signal available.

### GND disconnect with GND pull up

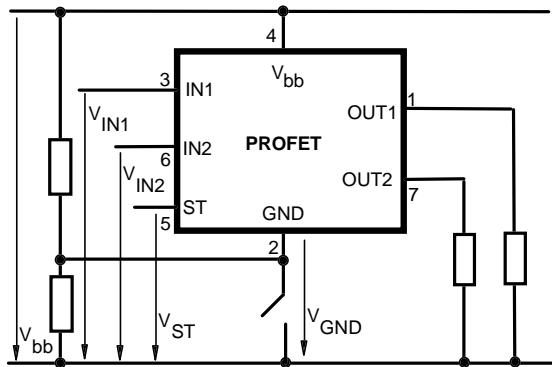


If  $V_{GND} > V_{IN} - V_{IN(T+)}$  device stays off  
Due to  $V_{GND} > 0$ , no  $V_{ST} = \text{low signal available}$ .

### Typ. transient thermal impedance chip case

$Z_{thJC} = f(t_p)$ , one Channel active


$Z_{thJC}$  [K/W]

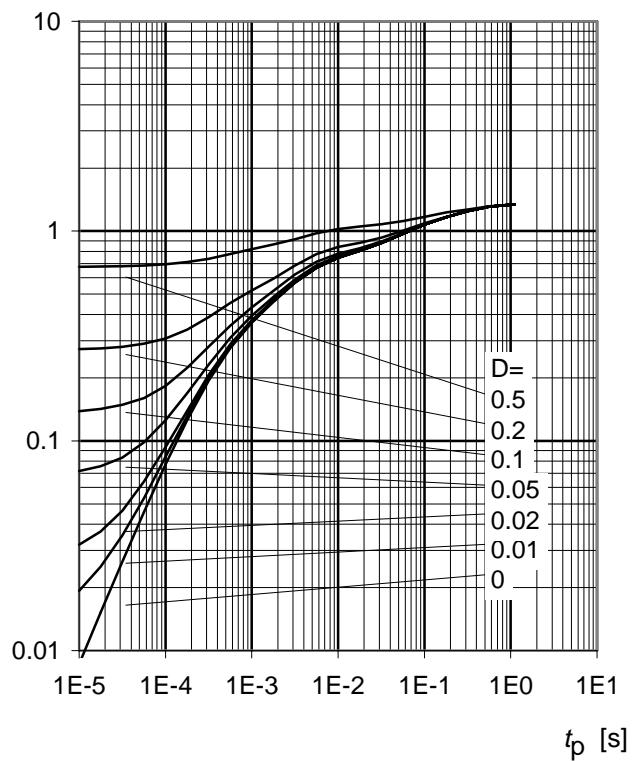

### Typ. transient thermal impedance chip case

$Z_{thJC} = f(t_p)$ , both Channel active


$Z_{thJC}$  [K/W]

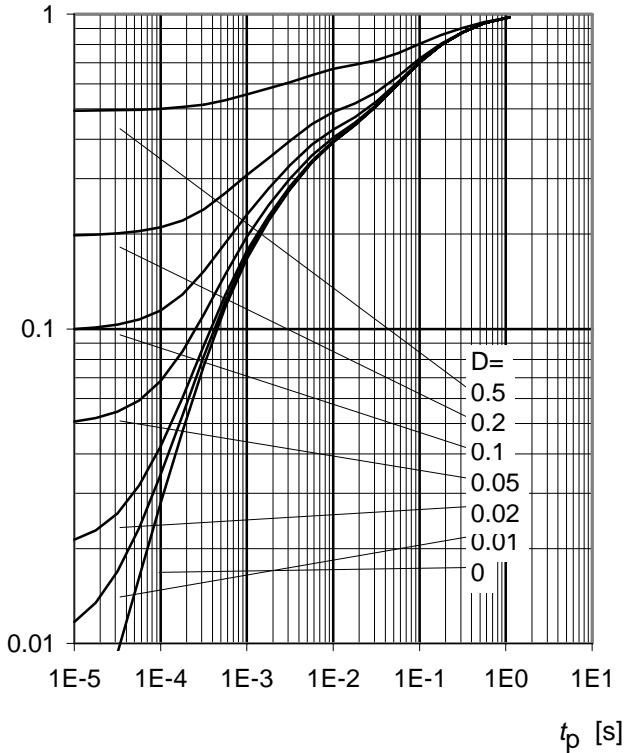


### Timing diagrams

Both channels are symmetric and consequently the diagrams are valid for each channel as well as for permuted channels


**Figure 1a:**  $V_{bb}$  turn on:

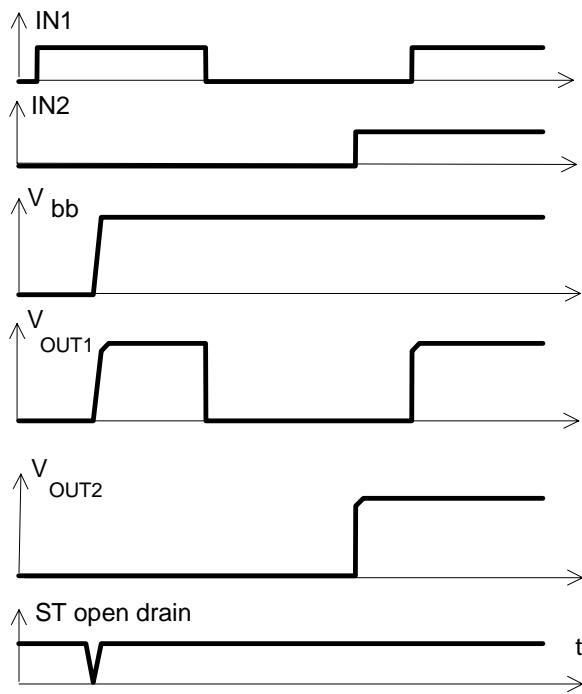


**Figure 3a:** Short circuit  
shut down by overtemperature, reset by cooling

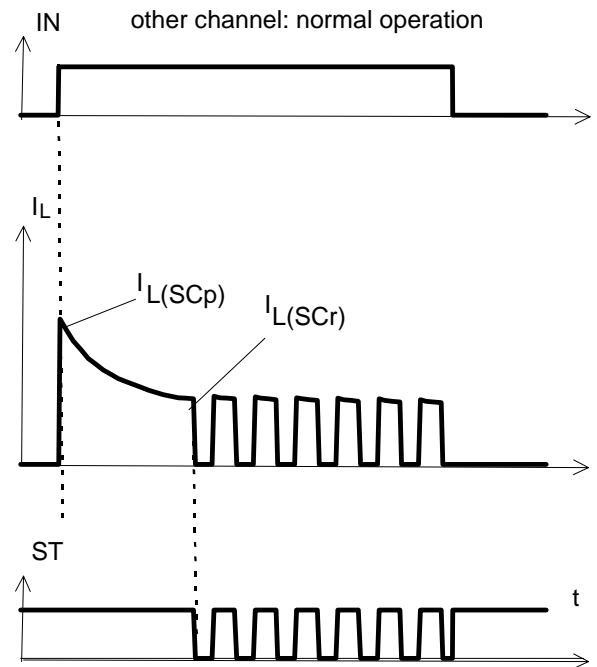


**Figure 2a:** Switching a lamp:

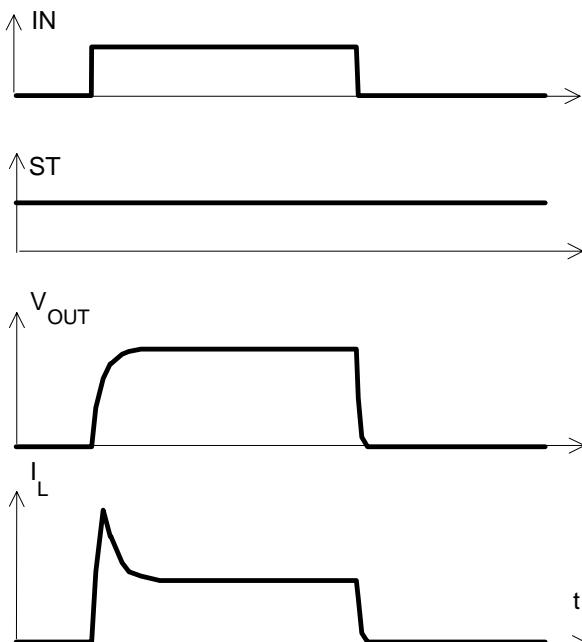


**Figure 4a:** Overtemperature:  
Reset if  $T_j < T_{jt}$

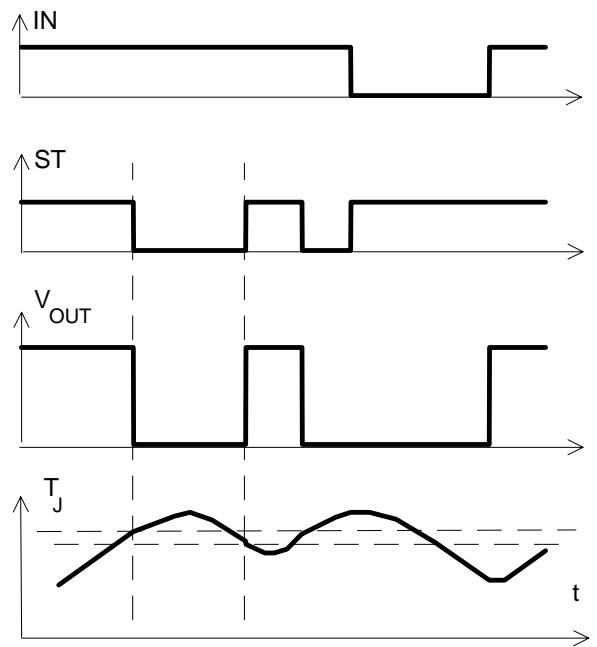


**Figure 5a:** Open load: detection in ON-state, open load occurs in on-state

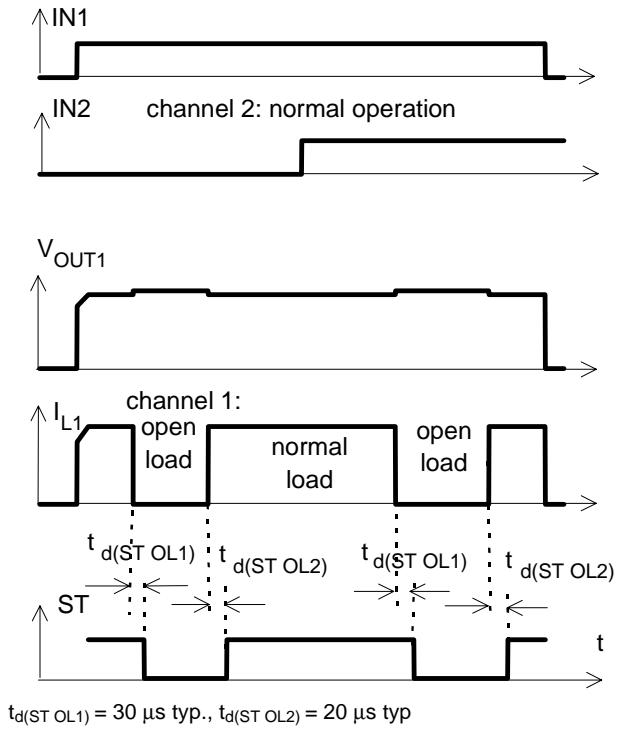


**Figure 5b:** Open load: detection in ON-state, turn on/off to open load

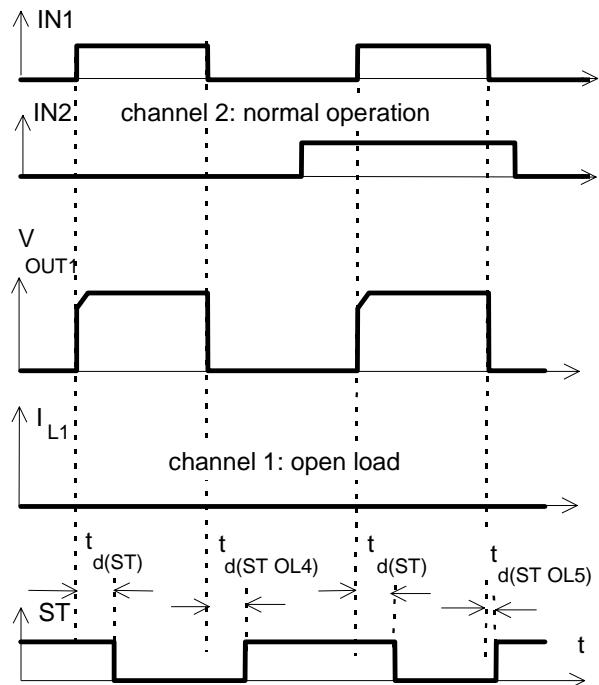


**Figure 5c:** Open load: detection in ON- and OFF-state (with R<sub>EXT</sub>), turn on/off to open load

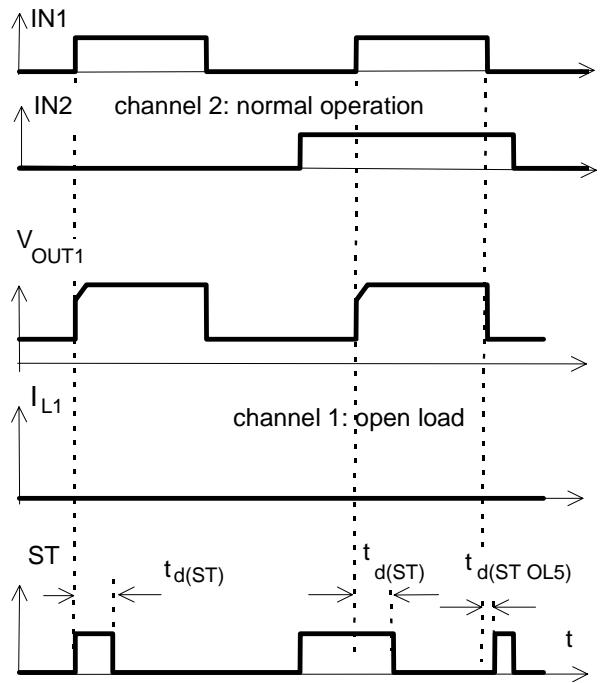


**Figure 6a:** Undervoltage:

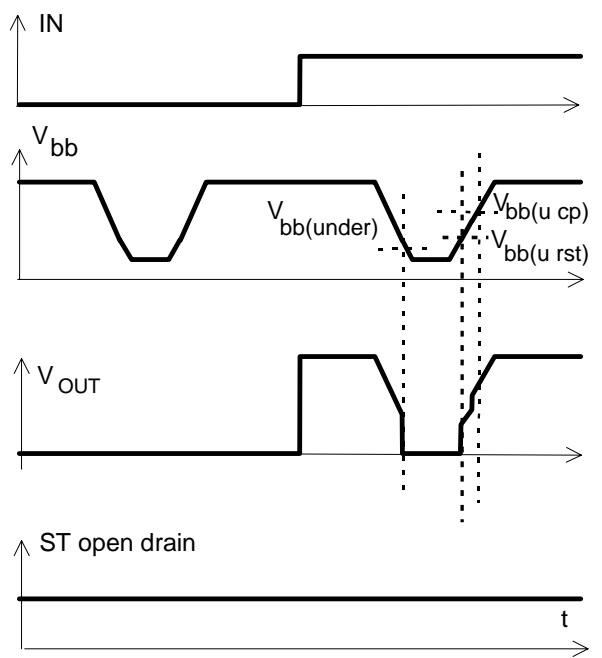

**Figure 6b:** Undervoltage restart of charge pump

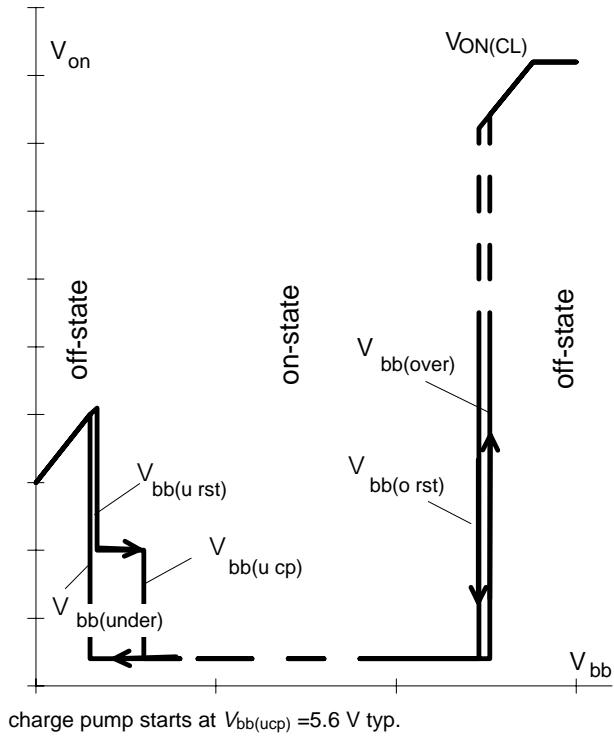

**Figure 7a:** Overvoltage:

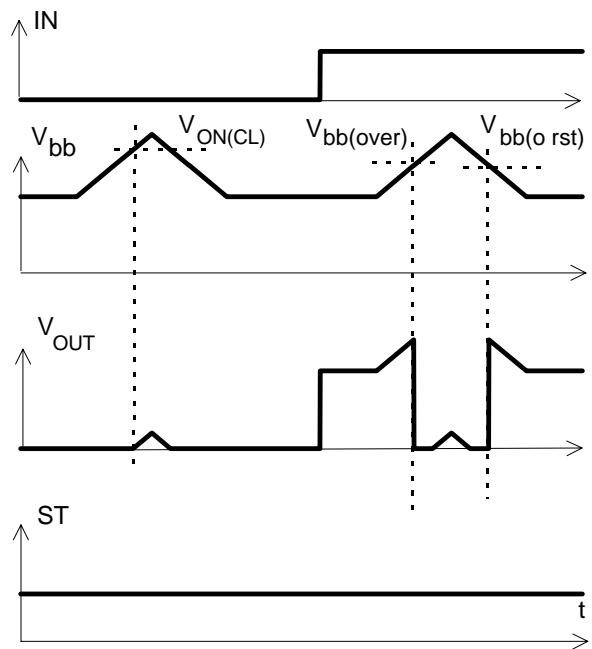


**Package and Ordering Code**

All dimensions in mm

**Standard TO-220AB/7****Ordering code**

BTS620L1	Q67060-S6301-A2
----------	-----------------

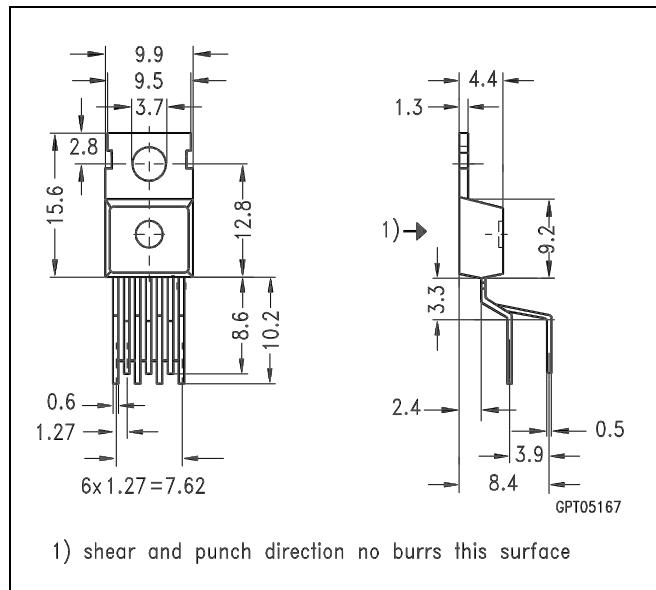**Changed since 04.96**

Date	Change
Dec 1996	td(ST OL4) max reduced from 1500 to 800µs, typical from 400 to 320µs, min limit unchanged
	Zth specification added
	max Output leakage current IL(off) reduced from 20 to 12 µA
	increased ESD capability
	Typ. reverse battery voltage drop - V <sub>ON(rev)</sub> added