




Tone generator LSI for cellular phones BU8766FV

●Description

The BU8766FV is a tone generator IC for producing a triple chord that has both a RAM and sequencer to reduce the load of CPU soft. Cellular phones can give a musical performance by down-loading melody data from the C-MIDI format. This IC corresponds to three master clocks and has an adjustment function for a parameter needed to generate a chord. Waveform parameter can be selected from sine wave and special square wave.

●Dimension (Units : mm)

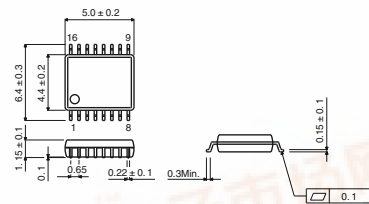

SSOP-B16

●Features

- 1) Triple chord can be generated by control from CPU.
- 2) CPU soft load can be decreased by incorporating RAM and sequencer.
- 3) RAM 1kByte as a buffer for download data.
- 4) Can adjust parameter needed to generate a chord.
- 5) DTMF generating function
- 6) Can select a wave parameter for generating sound. (sine wave/special square wave)
- 7) Control from CPU by serial data

●Applications

Cellular phones with a function to register melody at receiving the call

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	VDD	- 0.3 ~ + 4.5	V
Power dissipation	Pd	450 *	mW
Operating temperature range	Topr	- 40 ~ + 85	°C
Storage temperature range	Tstg	- 50 ~ + 125	°C

* Derating : 4.5mW / °C for operation above Ta=25°C

Recommended Operating Conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	VDD	2.2	2.5	3.6	V



Electrical characteristics (Unless otherwise noted: Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions		
< Digital DC characteristics >								
High level input voltage	VIH	0.7VDD	-	-	V			
Low level input voltage	VIL	-	-	0.3VDD	V			
High level input current	IIH	-	-	10	μ A	VIH=VDD		
Low level input current	IIL	- 10	-	-	μ A	VIH=GND		
High level output voltage	VCH	VDD- 0.3	-	-	V	IOH=- 0.8mA		
Low level output voltage	VCL	-	-	GND+ 0.3	V	IOL=0.8mA		
< Analog DC characteristics >								
VREF pin voltage	VAGND	0.475VDD	0.5VDD	0.525VDD	V	ICUT=0A(No load)		
ANOUT pin voltage	VOUT	0.47VDD	0.5VDD	0.53VDD	V	ICUT=0A(No load)		
< Whole characteristics(VDD=2.5V) >								
Circuit current	IDD1	-	-	1	μ A	RESET=L	Other inputs=L	No load
	IDD2	-	1500	2200	μ A	RESET=H	MCLK=2.688MHz	
	IDD3	-	1700	2500	μ A	Other inputs=L	MCLK=3.25MHz	
	IDD4	-	2500	3400	μ A		MCLK=4.92MHz	
VREF pin rise time	tRVR	-	25	40	nS	At CVREF=1μ F, RESET=L H		

Block Diagram

