



BYT 12PI-1000


FAST RECOVERY RECTIFIER DIODE

- VERY HIGH REVERSE VOLTAGE CAPABILITY
- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING
- INSULATED: Capacitance 7pF

SUITABLE APPLICATIONS

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.

Insulating voltage 2500 V_{RMS}

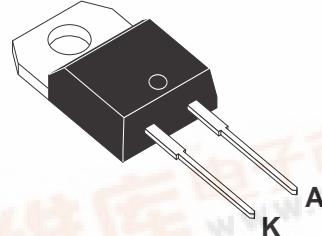

Isolated
TO220AC
(Plastic)

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
V _{RRM}	Repetitive Peak Reverse Voltage		1000	V
V _{RSM}	Non Repetitive Peak Reverse Voltage		1000	V
I _{FRM}	Repetitive Peak Forward Current	t _p ≤ 10μs	150	A
I _{F (RMS)}	RMS Forward Current		25	A
I _{F (AV)}	Average Forward Current	T _c = 50°C δ = 0.5	12	A
I _{FSM}	Surge non Repetitive Forward Current	t _p = 10ms Sinusoidal	75	A
P	Power Dissipation	T _c = 50°C	25	W
T _{stg} T _j	Storage and Junction Temperature Range		- 40 to + 150 - 40 to + 150	°C

THERMAL RESISTANCE

Symbol	Test Conditions	Value	Unit
R _{th (j - c)}	Junction-case	4	°C/W

BYT 12PI-1000

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
I_R	$T_j = 25^\circ C$	$V_R = V_{RRM}$			50	μA
	$T_j = 100^\circ C$				2.5	mA
V_F	$T_j = 25^\circ C$	$I_F = 12A$			1.9	V
	$T_j = 100^\circ C$				1.8	

RECOVERY CHARACTERISTICS

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
t_{rr}	$T_j = 25^\circ C$	$I_F = 1A$	$di_F/dt = -15A/\mu s$	$V_R = 30V$		155	ns
		$I_F = 0.5A$	$I_R = 1A$	$I_{rr} = 0.25A$		65	

TURN-OFF SWITCHING CHARACTERISTICS (Without Series Inductance)

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
t_{IRM}	$di_F/dt = -50A/\mu s$	$V_{CC} = 200 V \quad I_F = 12A$ $L_p \leq 0.05\mu H \quad T_j = 100^\circ C$ See figure 11			200	ns
	$di_F/dt = -100A/\mu s$			120		
I_{RM}	$di_F/dt = -50A/\mu s$				7.8	A
	$di_F/dt = -100A/\mu s$			9		

TURN-OFF OVERVOLTAGE COEFFICIENT (With Series Inductance)

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$C = \frac{V_{RP}}{V_{CC}}$	$T_j = 100^\circ C$	$V_{CC} = 200V$	$I_F = I_F(AV)$			4.5	

To evaluate the conduction losses use the following equations:

$$V_F = 1.47 + 0.026 I_F \quad P = 1.47 \times I_F(AV) + 0.026 I_F^2(RMS)$$

Figure 1. Low frequency power losses versus average current

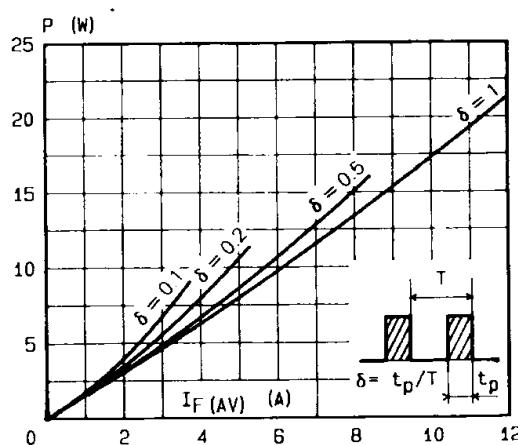


Figure 2. Peak current versus form factor

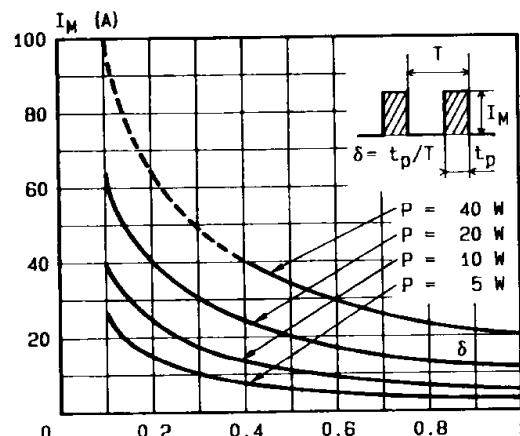


Figure 3. Non repetitive peak surge current versus overload duration

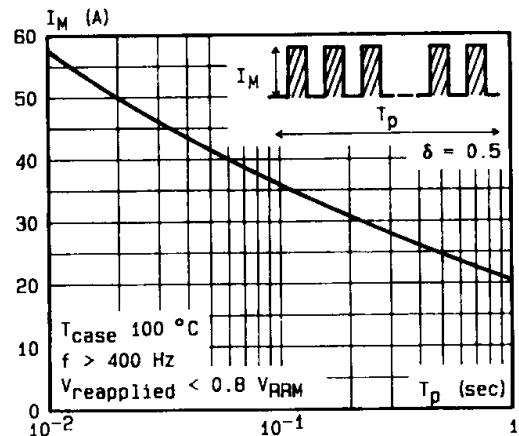


Figure 5. Voltage drop versus forward current

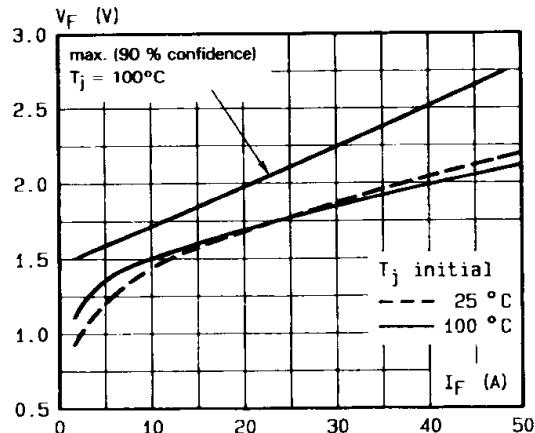


Figure 7. Recovery time versus di_F/dt

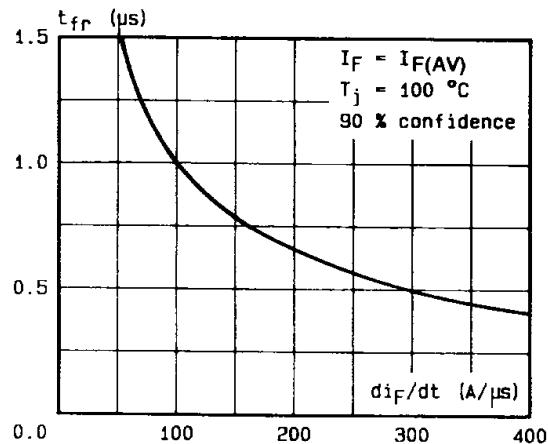


Figure 4. Thermal impedance versus pulse width

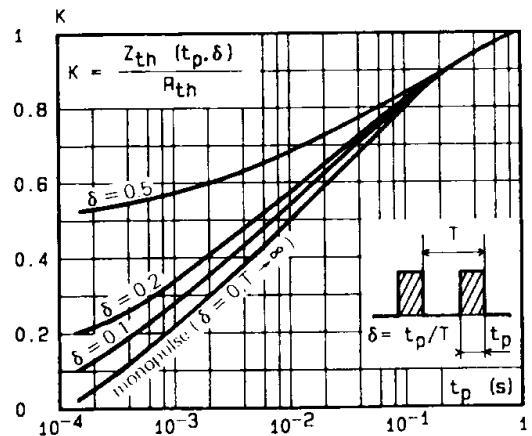


Figure 6. Recovery charge versus di_F/dt


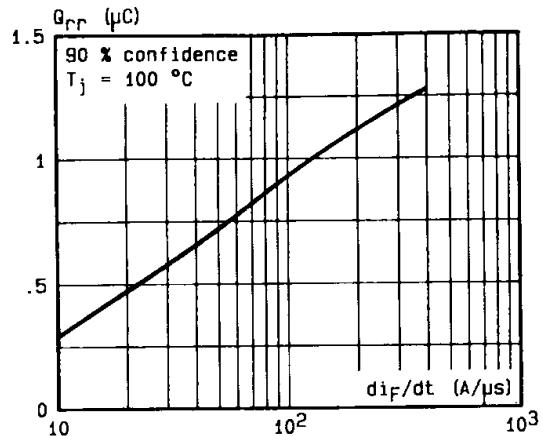


Figure 8. Peak reverse current versus di_F/dt

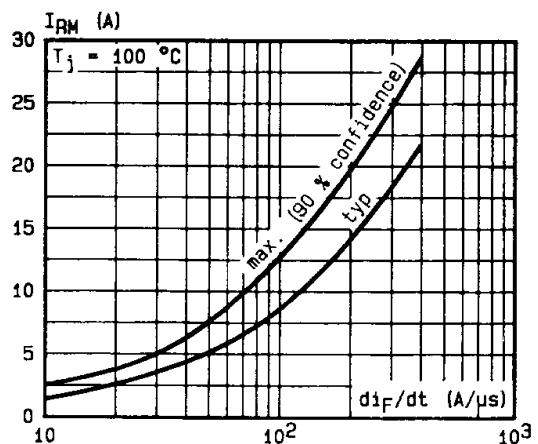

BYT 12PI-1000

Figure 9. Peak forward voltage versus di_F/dt .

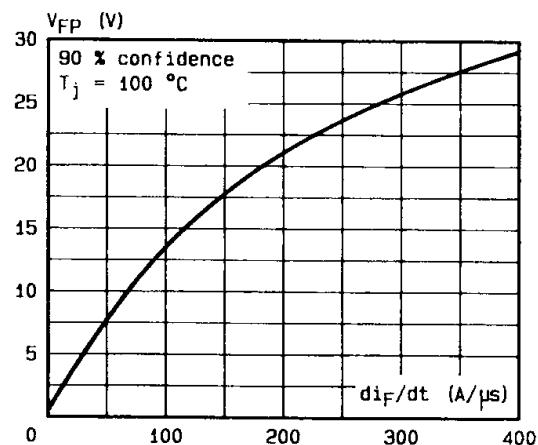


Figure 11. Turn-off switching characteristics (without series inductance).


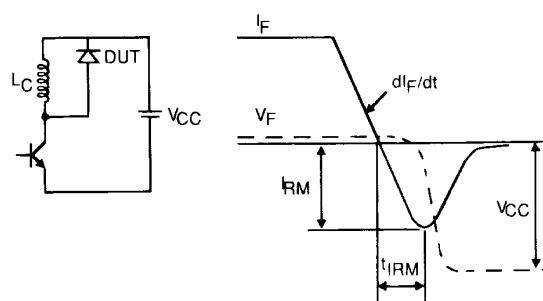


Figure 12. Turn-off switching characteristics (with series inductance)

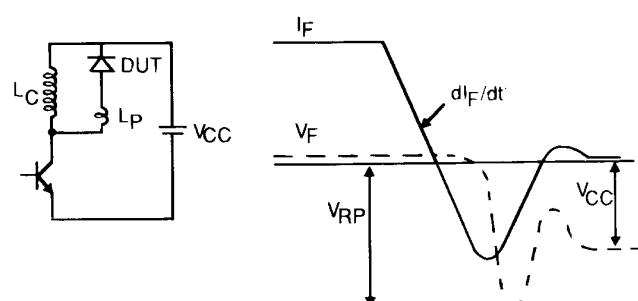

PACKAGE MECHANICAL DATA :
Isolated TO220AC Plastic

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.20		15.90	0.598		0.625
a1		3.75			0.147	
a2	13.00		14.00	0.511		0.551
B	10.00		10.40	0.393		0.409
b1	0.61		0.88	0.024		0.034
b2	1.23		1.32	0.048		0.051
C	4.40		4.60	0.173		0.181
c1	0.49		0.70	0.019		0.027
c2	2.40		2.72	0.094		0.107
e	4.80		5.40	0.189		0.212
F	6.20		6.60	0.244		0.259
I	3.75		3.85	0.147		0.151
I4	15.80	16.40	16.80	0.622	0.646	0.661
L	2.65		2.95	0.104		0.116
I2	1.14		1.70	0.044		0.066
M		2.60			0.102	

- **Marking:** type number
- **Cooling method:** by conduction (method C)
- **Weight :** 1.86g
- **Recommended torque value :** 80cm. N
- **Maximum torque value :** 100cm. N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>