



# BYT16P-400

## FAST RECOVERY RECTIFIER DIODES

### MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	<b>16 A</b>
$V_{RRM}$	<b>400 V</b>
$V_F(max)$	<b>1.4 V</b>
$t_{rr}(max)$	<b>35 ns</b>


### FEATURES AND BENEFITS

- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING

### DESCRIPTION

This double rectifier is suited for Switch Mode Power Supplies and other power converters.

This device is intended to free-wheeling function in converters and motor control circuits.

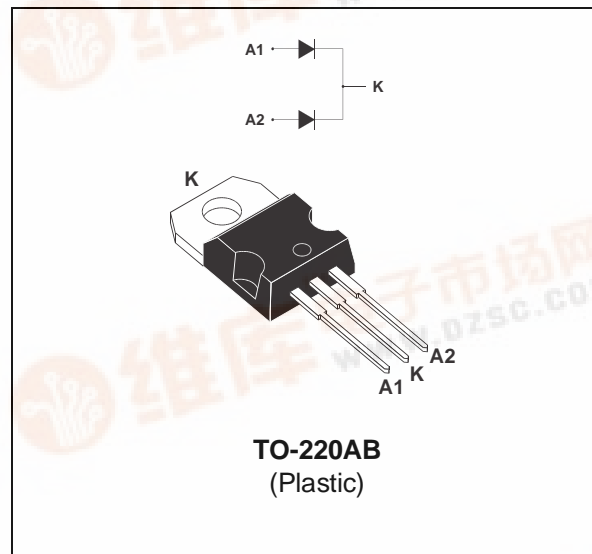

### ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		400	V
$I_{FRM}$	Repetitive peak forward current	$t_p=5\ \mu s$ $F=1kHz$	300	A
$I_{F(RMS)}$	RMS forward current		30	A
$I_{F(AV)}$	Average forward current	$T_c = 100^\circ C$ $\delta = 0.5$	16	A
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10\ ms$ Sinusoidal	100	A
$T_{stg}$	Storage temperature range		- 40 to + 150	$^\circ C$
$T_j$	Maximum operating junction temperature		150	$^\circ C$



## BYT16P-400

### THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	Junction to case	Per diode	3.75	°C/W
		Total	2	
$R_{th(c)}$		Coupling	0.25	

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j(\text{diode 1}) = P(\text{diode}) \times R_{th(j-c)} (\text{Per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$V_F^*$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 8\text{ A}$			1.5	V
		$T_j = 100^\circ\text{C}$				1.4	
$I_R^{**}$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			15	$\mu\text{A}$
		$T_j = 100^\circ\text{C}$				2.5	mA

Pulse test : \*  $t_p = 380\ \mu\text{s}$ ,  $\delta < 2\%$

\*\*  $t_p = 5\ \text{ms}$ ,  $\delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 1.1 \times I_{F(AV)} + 0.024 I_{F(RMS)}^2$$

### RECOVERY CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$t_{rr}$	$T_j = 25^\circ\text{C}$	$I_F = 1\text{ A}$ $V_R = 30\text{ V}$ $dI_F/dt = -15\text{ A}/\mu\text{s}$			75	ns
		$I_F = 0.5\text{ A}$ $I_R = 1\text{ A}$ $I_{rr} = 0.25\text{ A}$			35	

### TURN-OFF SWITCHING CHARACTERISTICS

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$t_{IRM}$	Maximum reverse recovery time	$dI_F/dt = -32\ \text{A}/\mu\text{s}$	$V_{CC} = 200\ \text{V}$ $I_F = 8\ \text{A}$ $L_p \leq 0.05\ \mu\text{H}$ $T_j = 100^\circ\text{C}$ (see fig. 11)			75	ns
		$dI_F/dt = -64\ \text{A}/\mu\text{s}$				50	
$I_{RM}$	Maximum reverse recovery current	$dI_F/dt = -32\ \text{A}/\mu\text{s}$	$T_j = 100^\circ\text{C}$ (see fig. 11)			2.2	A
		$dI_F/dt = -64\ \text{A}/\mu\text{s}$				2.8	
$C = \frac{V_{RP}}{V_{CC}}$	Turn-off overvoltage coefficient	$T_j = 100^\circ\text{C}$ $V_{CC} = 120\text{ V}$ $I_F = I_{F(AV)}$ $dI_F/dt = -8\text{ A}/\mu\text{s}$ $L_p = 9\ \mu\text{H}$ (see fig. 12)			3.3		/

Fig. 1: Low frequency power losses versus average current.

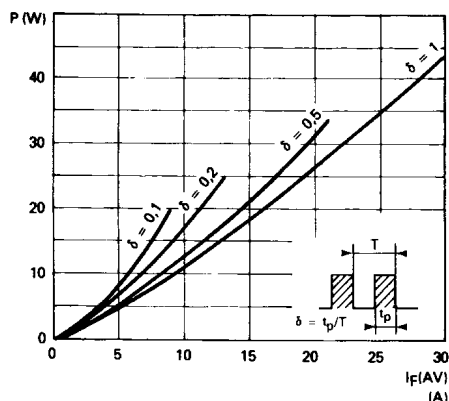


Fig. 2: Peak current versus form factor.

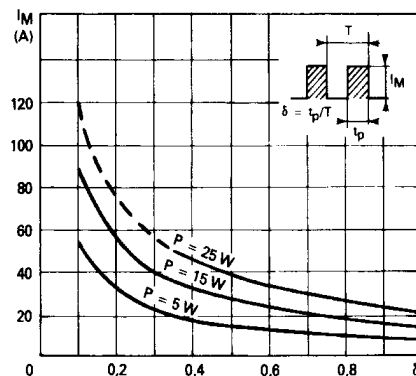


Fig. 3: Non repetitive peak surge current versus overload duration.

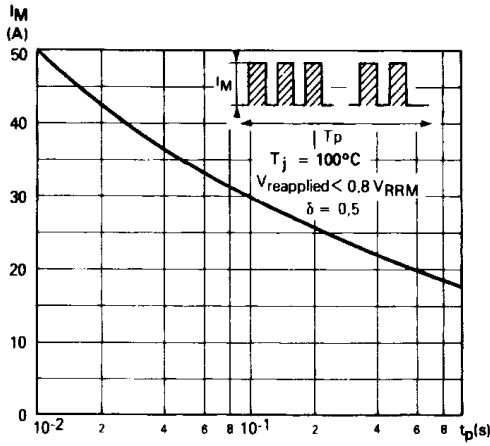


Fig. 4: Thermal impedance versus pulse width.

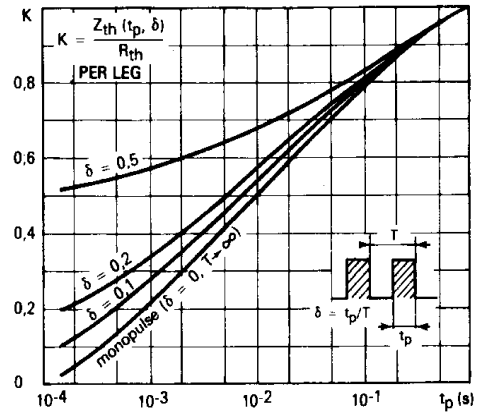


Fig. 5: Voltage drop versus forward current.

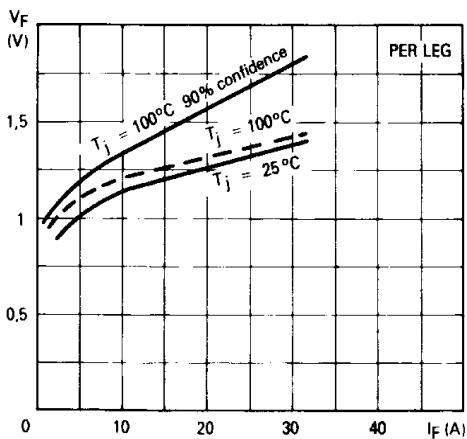


Fig. 6: Recovery charge versus di\_F/dt.

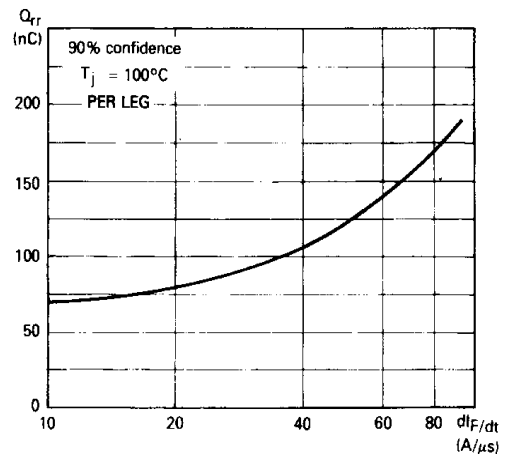


Fig. 7: Recovery time versus di\_F/dt.



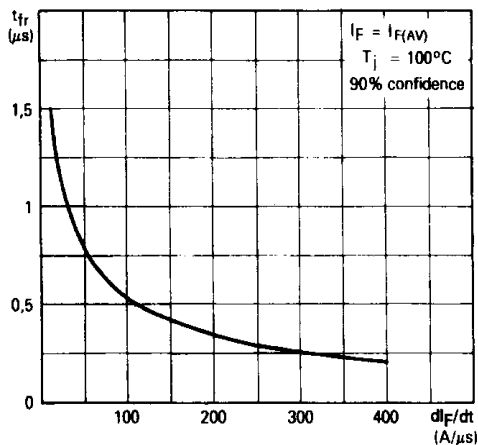


Fig. 8: Peak reverse current versus di\_F/dt.

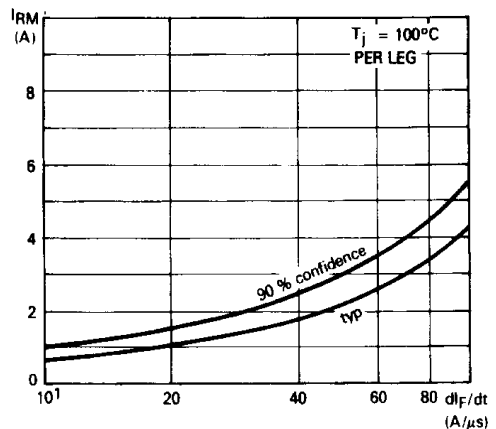


## BYT16P-400


**Fig. 9:** Peak forward voltage versus  $di_F/dt$ .

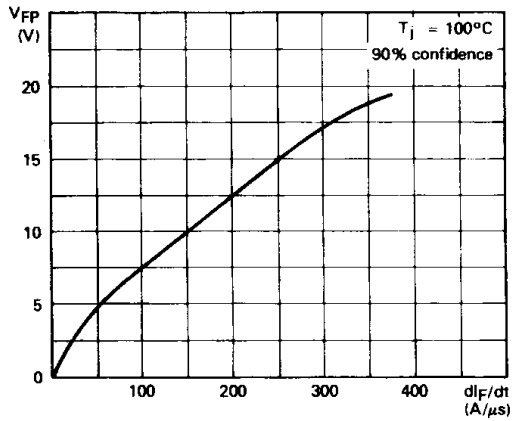


**Fig. 10:** Dynamic parameters versus junction temperature.

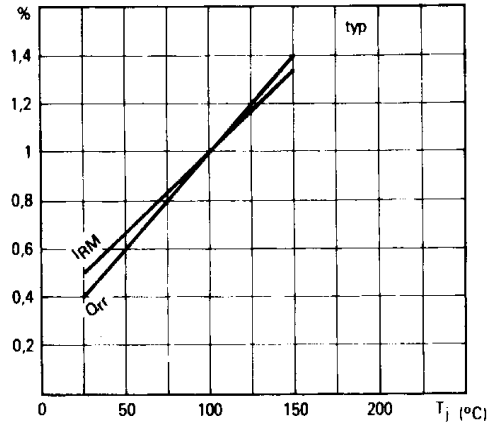


**Fig. 11:** Turn-off switching characteristics (without series inductance).

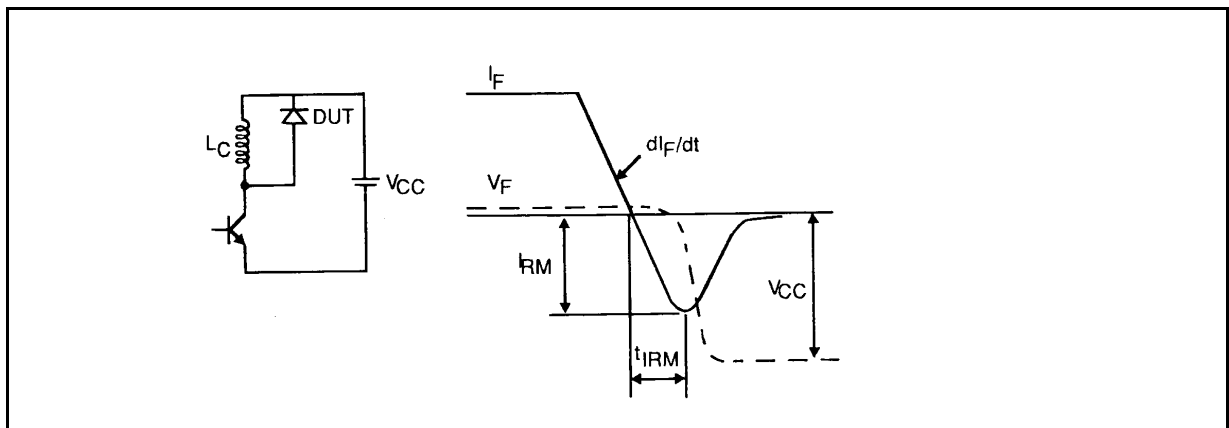

**Fig. 12:** Turn-off switching characteristics (with series inductance).

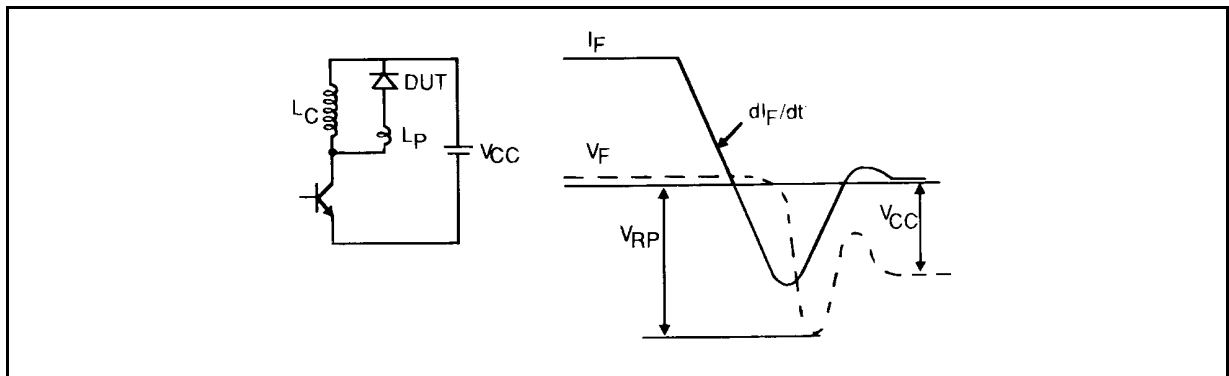

**PACKAGE MECHANICAL DATA**  
TO-220AB

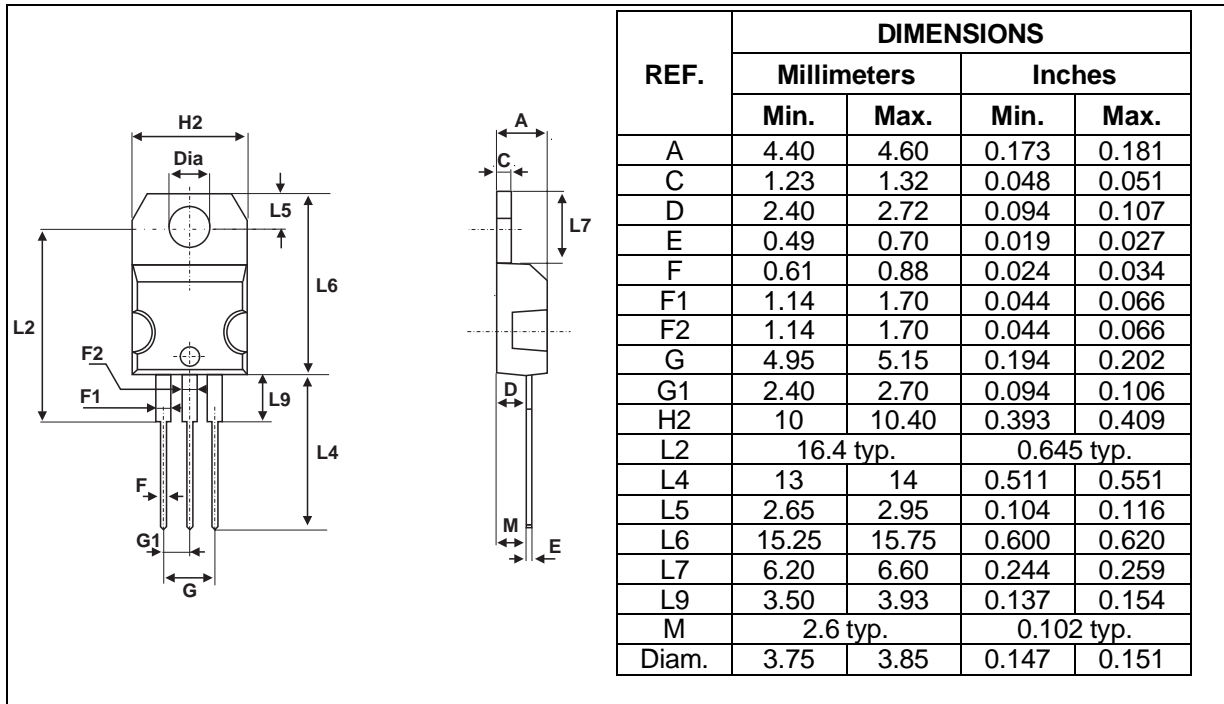

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
BYT16P-400	BYT16P-400	TO-220AB	2.03 g.	30	Tube

- Cooling method: by conduction (C)
- Recommended torque value: 0.08 N.m.
- Maximum torque value: 0.10 N.m.
- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>