


BYV32-50 THRU BYV32-200

FAST EFFICIENT PLASTIC RECTIFIER

Reverse Voltage - 50 to 150 Volts

Forward Current - 18.0 Amperes


TO-220AB

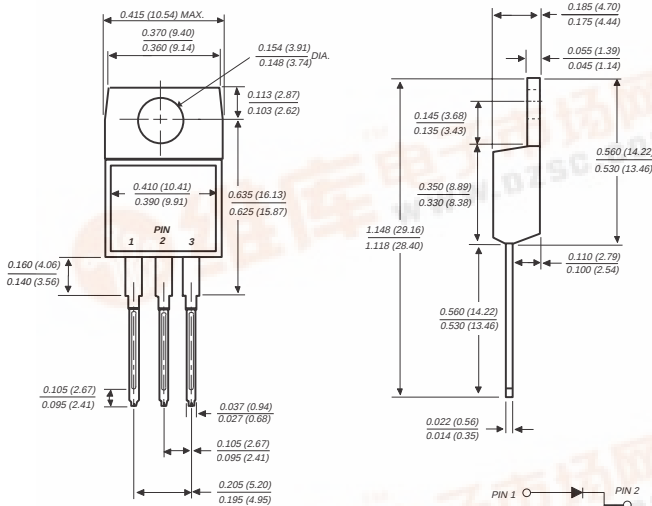

Dimensions in inches and (millimeters)

FEATURES

- ♦ Dual rectifier construction, positive centertap
- ♦ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ♦ Glass passivated chip junctions
- ♦ Low power loss
- ♦ Low forward voltage, high current capability
- ♦ High surge capability
- ♦ Superfast recovery time for high efficiency
- ♦ High temperature soldering guaranteed: 250°C, 0.16" (4.06mm) from case for 10 seconds



MECHANICAL DATA

Case: JEDEC TO-220AB molded plastic body over passivated chips

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	BYV32-50	BYV32-100	BYV32-150	BYV32-200	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	Volts
Maximum RMS voltage	V_{RMS}	35	70	105	140	Volts
Maximum DC blocking voltage	V_{DC}	50	100	150	200	Volts
Maximum average forward rectified current at $T_C=120^\circ\text{C}$	$I_{(AV)}$	18.0				Amps
Peak forward surge current 10ms single half sine-wave superimposed at at $T_J=150^\circ\text{C}$	I_{FSM}	150.0				Amps
Maximum instantaneous forward voltage per leg at: $I_F=20\text{A}$ $I_F=5.0\text{A}, T_J=100^\circ\text{C}$	V_F	1.15 0.85				Volts
Maximum DC reverse current at rated DC blocking voltage $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	I_R	10.0 600.0				μA
Maximum reverse recovery time per leg (NOTE 1)	t_{rr}	25.0				ns
Typical junction capacitance per leg (NOTE 2)	C_J	45.0				pF
Maximum thermal resistance per leg (NOTE 3)	$R_{\theta JA}$ $R_{\theta JC}$	20.0 3.0				$^\circ\text{C/W}$
Operating and storage temperature range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$

NOTES:

- (1) Reverse recovery test conditions: $I_F=1\text{A}$ $V_R=30\text{V}$, $di/dt=100\text{A}/\mu\text{s}$, $I_{rr}=10\% I_{RM}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient and from junction to case per leg mounted on heatsink



RATINGS AND CHARACTERISTIC CURVES BYV32-50 THRU BYV32-200

FIG. 1 - FORWARD CURRENT DERATING CURVE

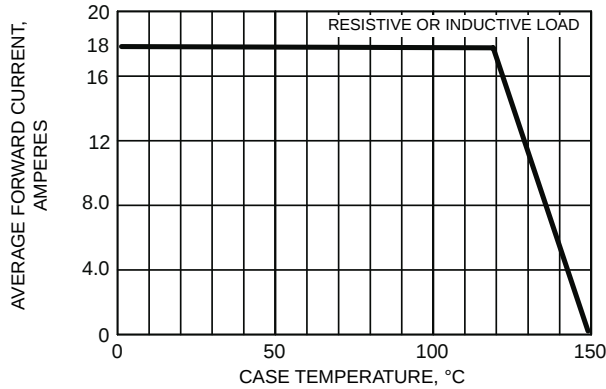


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

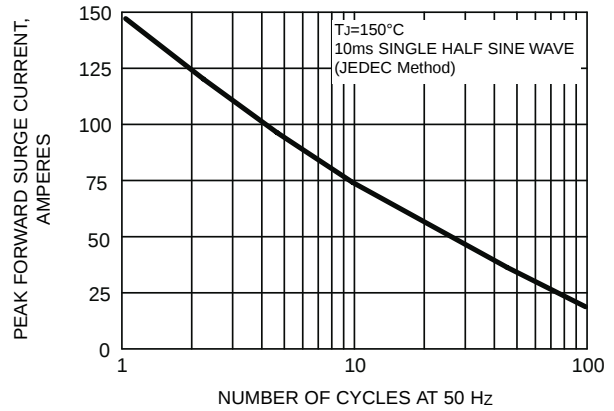


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

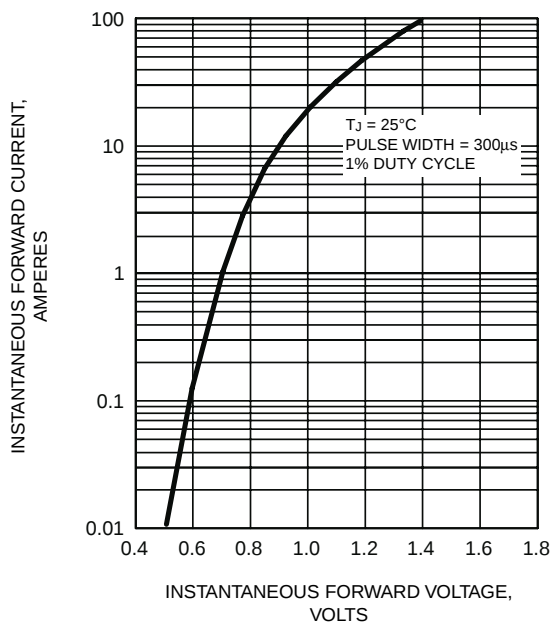


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

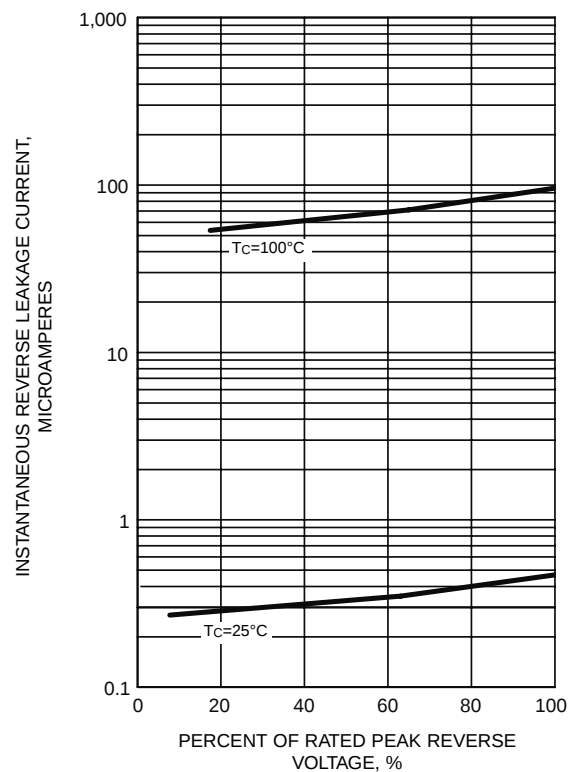


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

