


FRD Type : C10T20F-11A

OUTLINE DRAWING

FEATURES

- * Tabless TO-220
- * Dual Diodes – Cathode Common
- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * High Surge Capability
- * 200 Volts thru 600 Volts Types Available

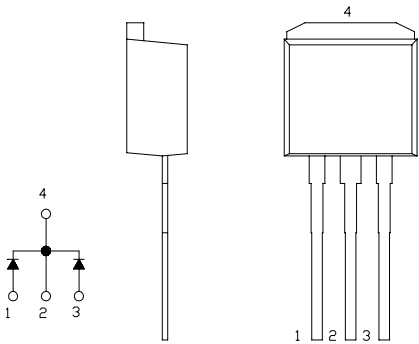

Maximum Ratings


Approx Net Weight:1.75g

Rating	Symbol	C10T20F-11A			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	200			V
Non-repetitive Peak Reverse Voltage	V _{RSM}	220			V
Average Rectified Output Current	I _O	10	Tc=117°C	50 Hz,Full Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	11.1			A
Surge Forward Current	I _{FSM}	80	50 Hz Full Sine Wave,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150			°C
Storage Temperature Range	T _{stg}	- 40 to + 150			°C



Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j=25^{\circ}C, V_{RM}=V_{RRM}$ per Arm	-	-	20	μA
Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}C, I_{FM}=5A$ per Arm	-	-	0.98	V
Reverse Recovery Time	t_{rr}	$I_{FM}=5A$, $-di/dt=50A/\mu s$, $T_a=25^{\circ}C$	-	-	35	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	3	$^{\circ}C/W$


C_T_ 11A OUTLINE DRAWING (Dimensions in mm)

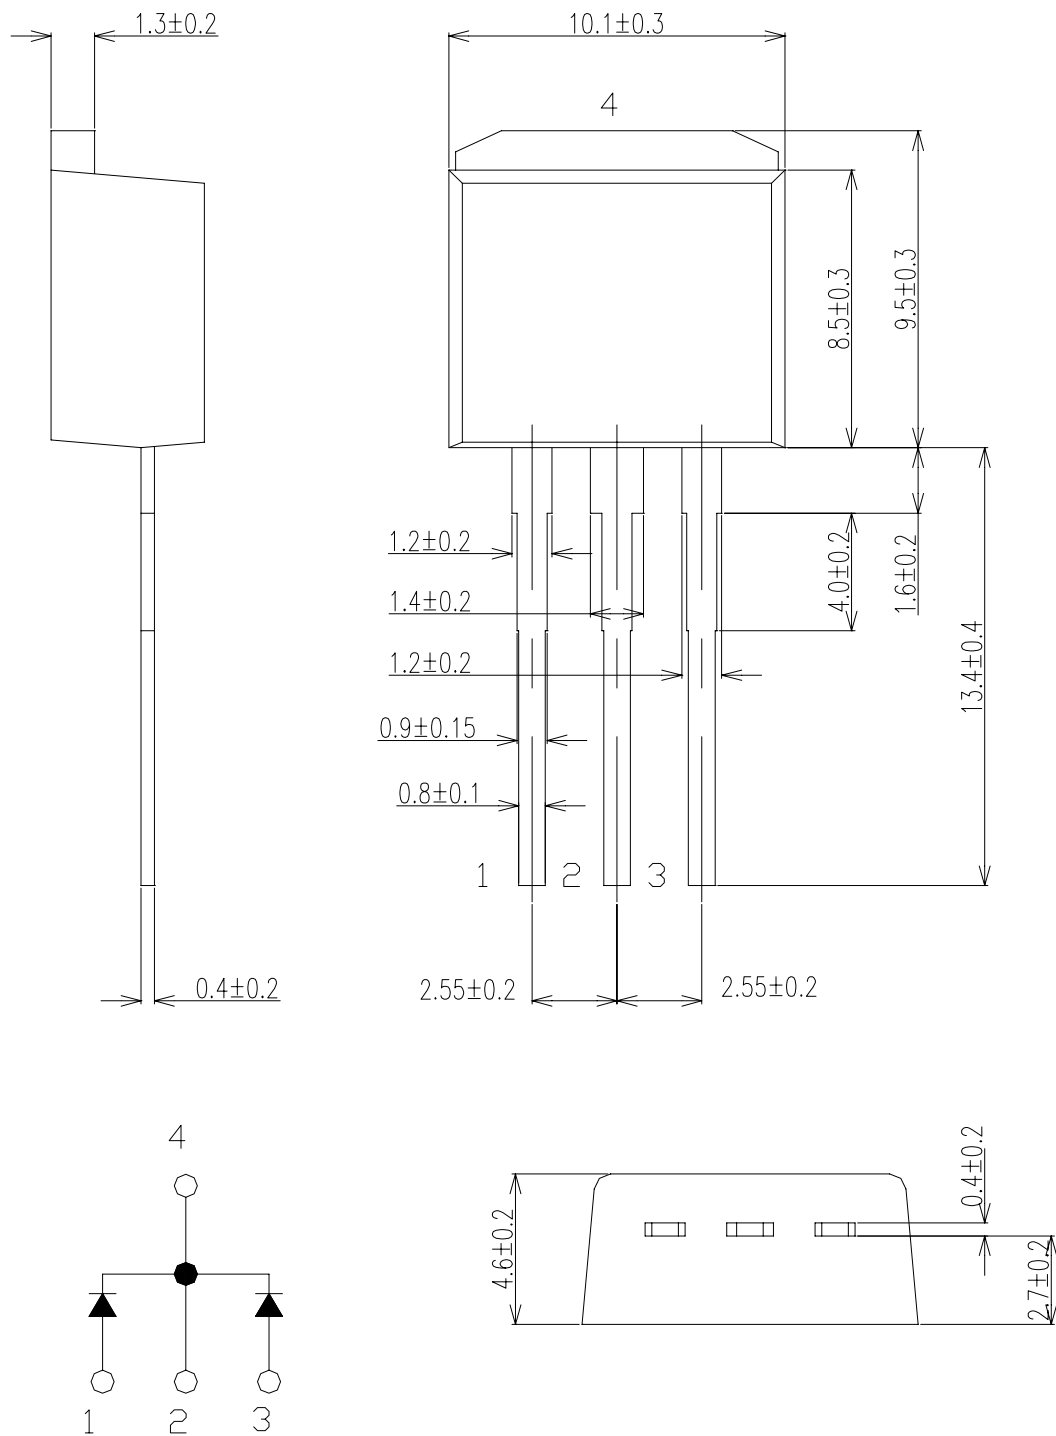


FORWARD CURRENT VS. VOLTAGE

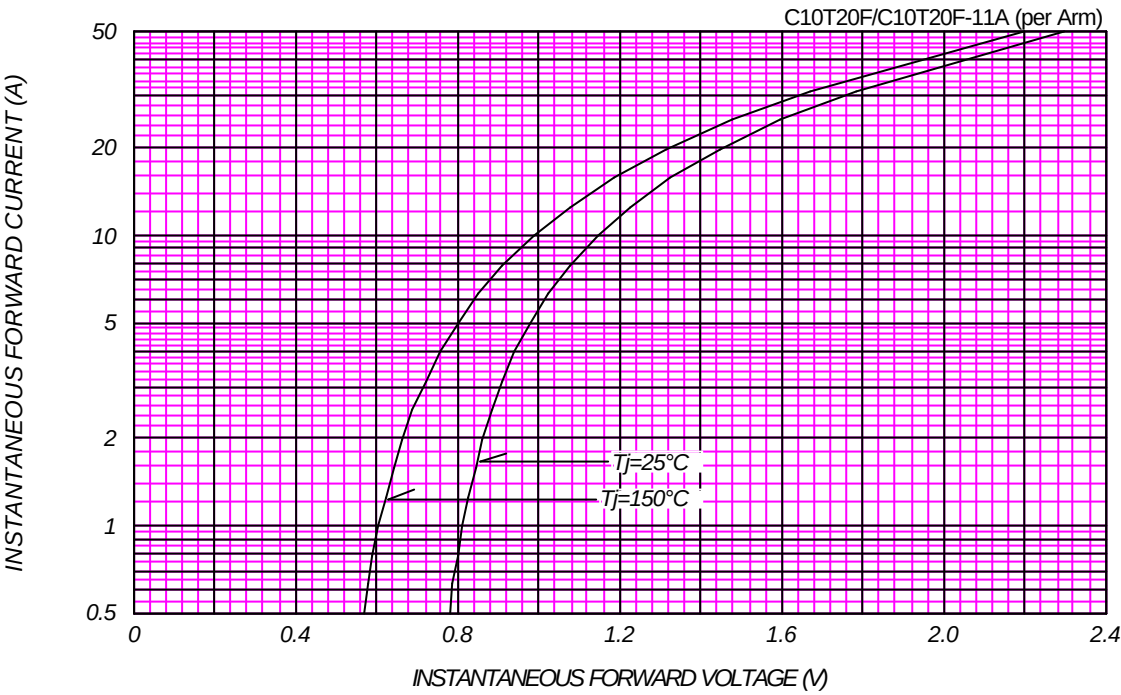


AVERAGE FORWARD POWER DISSIPATION

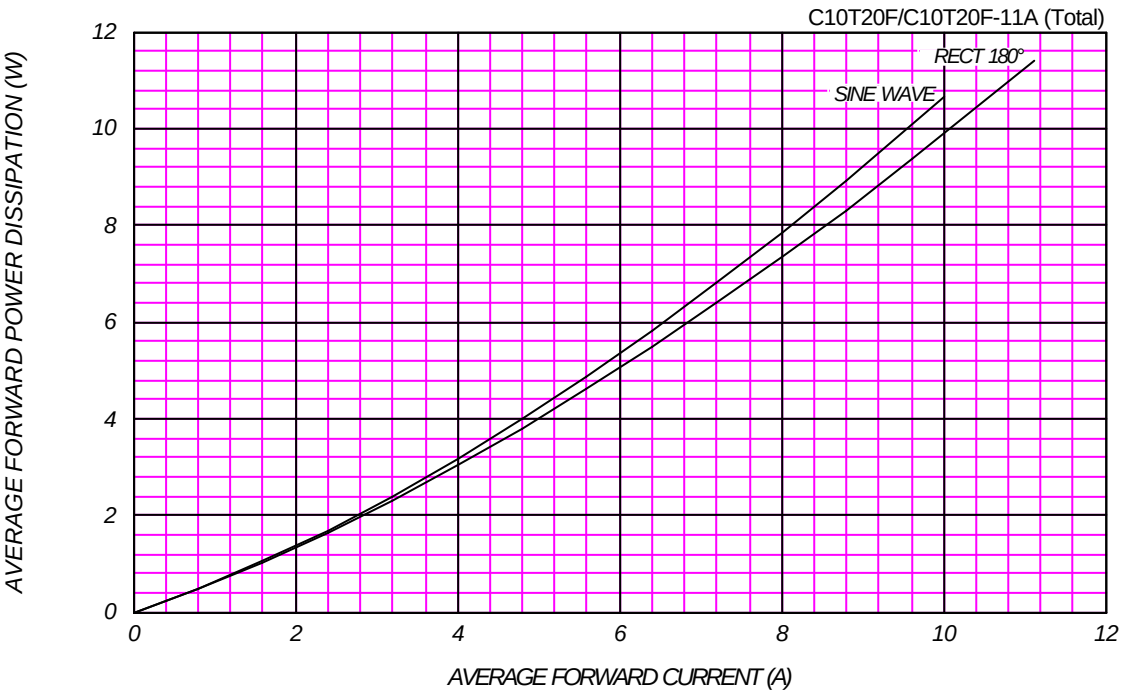



AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

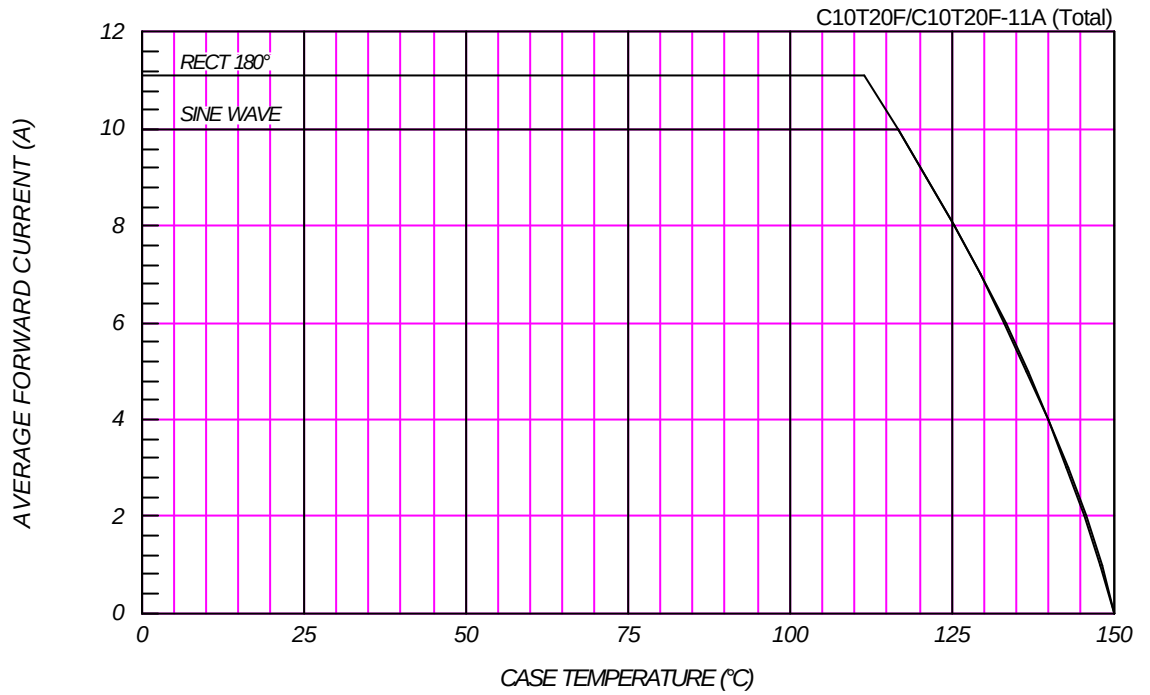

SURGE CURRENT RATINGS

f=50Hz, Sine Wave, Non-Repetitive, No Load

