


specifications

Polyester thermal transfer adhesive label material shall meet a variety of flat surface applications including electronics, equipment, panels, bins, etc. The label shall withstand a temperature range of -40°F to 302°F (-40°C to 150°C), harsh solvents, oils, and chemicals without over-lamination. The label shall be white in color with a permanent acrylic adhesive and supplied on rolls. Shall be halogen free and meet UL 969 requirements.



technical information

Material:	White polyester label with pressure sensitive acrylic adhesive
Print method:	Thermal transfer
Temperature range:	-40°F to 320°F (-40°C to 150°C)
Recommended ribbon:	Resin ribbon for desktop printer (TDP42H series – RHR4BL-S)
UL recognized:	File No. MH14979
RoHS compliance:	Material is RoHS compliant per European Directive 2002/95/EC on the Restriction of Hazardous Substances (RoHS)

key features and benefits

Material resistance to harsh conditions	Material withstands a temperature range of -40°F to 302°F (-40°C to 150°C) and are indoor/outdoor rated to provide durability, high temperature resistance, and dimensional stability for long-life and reliability
Variety of sizes	Full range of sizes ensures the correct label for the application
Labeling software capabilities	Generate labels quickly and easily with <i>PANDUIT® EASY-MARK™</i> Labeling Software; labeling application tools assist in the creation of optimum identifiers and labels for common labeling applications; advanced importing and bar-coding capabilities reduce errors and save time

applications

PANDUIT general-purpose polyester adhesive label material is designed for a variety of flat surface applications including electronics, equipment, panels, bins, etc. The labels withstand a temperature range of -40°F to 302°F (-40°C to 150°C), harsh solvents, oils, and chemicals without over-lamination.

The labels are white in color with a permanent acrylic adhesive, supplied on three inch cores for easy loading and offer crisp, clear legends with superior legibility. When printed on a *PANDUIT* thermal transfer desktop printer utilizing the resin ribbon the labels meet the print performance requirements for UL-969.

Polyester Component Labels

Size	Part Number
.25" x .25" (6.3mm x 6.3mm):	C025X025YJT
.38" x .38" (9.6mm x 9.6mm):	C038X038YJT
.50" x .44" (12.7mm x 11.1mm):	C050X044YJT
.60" x .20" (15.2mm x 5.1mm):	C060X020YJT
.75" x .25" (19.0mm x 6.3mm):	C075X025YJT
.80" x .20" (20.3mm x 5.1mm):	C080X020YJT
1.00" x .25" (25.4mm x 6.3mm):	C100X025YJT
1.00" x .50" (31.7mm x 6.3mm):	C100X050YJT
1.50" x .75" (38.1mm x 19.0mm):	C150X075YJT
1.60" x .20" (40.6mm x 5.1mm):	C160X020YJT
2.00" x .50" (50.8mm x 12.7mm):	C200X050YJT
2.00" x 1.00" (50.8mm x 25.4mm):	C200X100YJT

Labeling Software

EASY-MARK™
Labeling Software: PROG-EMCD3

CAD-CONNECT™
Labeling Software: PROG-CCCD


Thermal Transfer Desktop Printers

203 DPI:	TDP42H
305 DPI:	TDP43H
609 DPI:	TDP46H



Polyester Component Labels

Part Number	Description	Color	Width 'A'	Height 'B'	Horizontal Repeat 'C'	Vertical Repeat 'D'	Labels per Row	Package Quantity	Carton Quantity
C025X025YJT	Polyester Component Label	White	.25" (6.3mm)	.25" (6.3mm)	.25" (6.3mm)	.38" (9.6mm)	12	10,000	40,000
C038X038YJT	Polyester Component Label	White	.38" (9.6mm)	.38" (9.6mm)	.44" (11.1mm)	.50" (12.7mm)	7	10,000	40,000
C050X044YJT	Polyester Component Label	White	.50" (12.7mm)	.44" (11.1mm)	.56" (14.0mm)	.56" (14.0mm)	5	10,000	40,000
C060X020YJT	Polyester Component Label	White	.60" (15.2mm)	.20" (5.1mm)	.65" (16.5mm)	.33" (8.4mm)	3	10,000	40,000
C075X025YJT	Polyester Component Label	White	.75" (19.0mm)	.25" (6.3mm)	.75" (19.0mm)	.38" (9.6mm)	3	10,000	40,000
C080X020YJT	Polyester Component Label	White	.80" (20.3mm)	.20" (5.1mm)	.80" (20.3mm)	.33" (8.4mm)	3	10,000	40,000
C100X025YJT	Polyester Component Label	White	1.00" (25.4mm)	.25" (6.3mm)	1.08" (27.4mm)	.38" (9.6mm)	3	10,000	40,000
C100X050YJT	Polyester Component Label	White	1.00" (25.4mm)	.50" (12.7mm)	1.08" (27.4mm)	.63" (16.0mm)	3	10,000	40,000
C150X075YJT	Polyester Component Label	White	1.50" (38.1mm)	.75" (19.0mm)	n/a	.88" (22.2mm)	1	5,000	20,000
C160X020YJT	Polyester Component Label	White	1.60" (40.6mm)	.20" (5.1mm)	n/a	.33" (8.4mm)	1	10,000	40,000
C200X050YJT	Polyester Component Label	White	2.00" (50.8mm)	.50" (12.7mm)	n/a	.63" (16.0mm)	1	5,000	20,000
C200X100YJT	Polyester Component Label	White	2.00" (50.8mm)	1.00" (25.4mm)	n/a	1.13" (28.6mm)	1	2,500	10,000

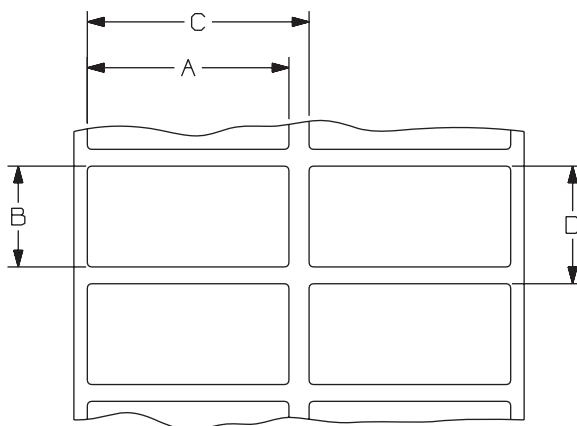

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of *PANDUIT* product warranties, log on to www.panduit.com/warranty



For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference IDSP03

©2006 *PANDUIT* Corp.
ALL RIGHTS RESERVED.
Printed in the U.S.A.
SA-IDSP03
8/2006