


C2852		
--------------	--	---

Product Description	ADSL Coupling Transformer, IEC950 Supplementary 250V 850uH, 1:1 (Line : IC), GW CEP 7
----------------------------	--

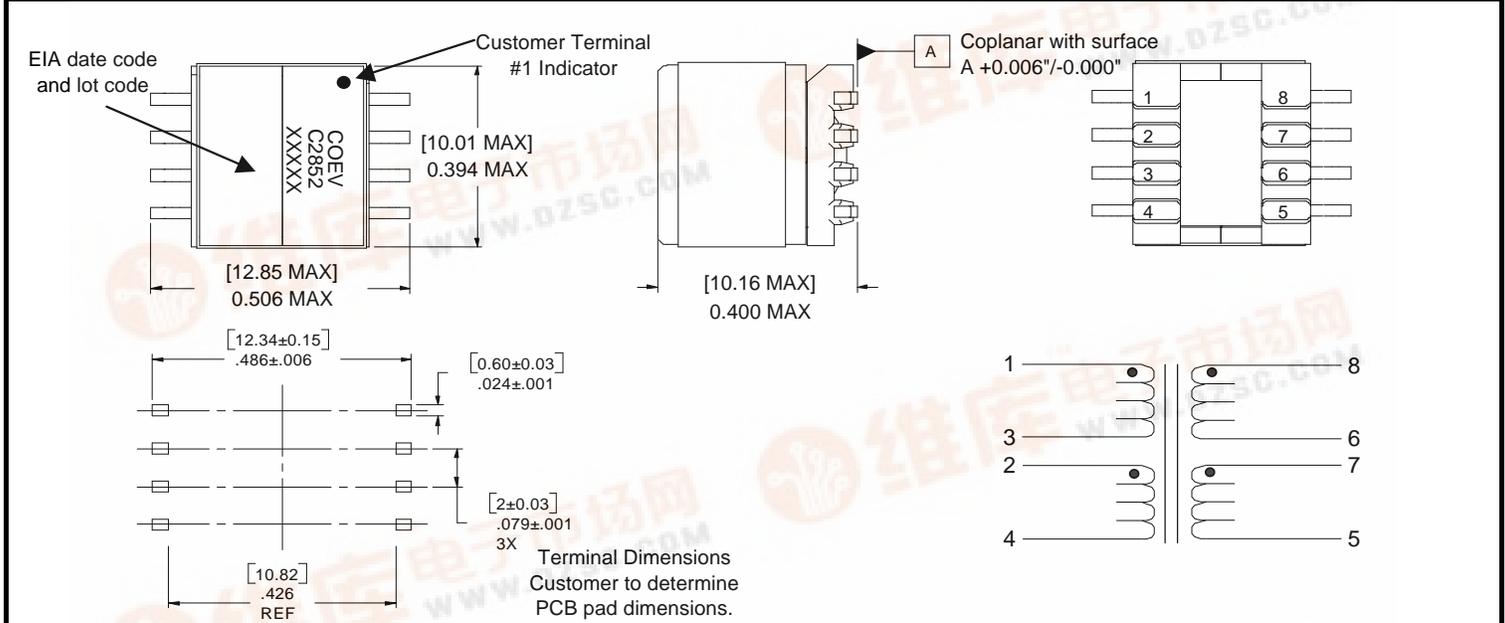

Primary units are in inches. Millimeters are in brackets.

Electrical Specifications at +20°C unless noted otherwise

Test Description	Limit	Units	Tol	Notes
Inductance	850.00	μH	±5%	1-4 tie(2+3), 10kHz, 100mVAC, Ls.
Leakage Inductance	5.50	μH	Max.	1-4 tie(2+3,5-8), 100kHz, 100mVAC, Ls.
DC Resistance	3.33	Ω	±10%	1-3
DC Resistance	1.40	Ω	±10%	8-6
DC Resistance	4.02	Ω	±10%	2-4
DC Resistance	1.70	Ω	±10%	7-5
Turns Ratio	1.00 : 1.00	---	±1%	(1-4) : (8-5) tie(2+3,6+7), 10KHz, 100mVAC.
Dielectric	1,875	VAC	500μA	1-8 tie(2+3,6+7), 1 second test, 500μA maximum leakage current.
Total Harmonic Distortion	-90.00	dB	Max.	40kHz, 2.5dB [7.07 Vp-p], Line : IC
Insertion Loss	0.70	dB	Max.	100kHz.
Frequency Response	±0.50	dB	---	30kHz - 1.1MHz, 100kHz Reference.
Longitudinal Balance (ITU)	40.00	dB	Min.	1.1MHz - Hz, Gnd pin 8.

Patent Pending