



SEMICONDUCTOR™

March 2001
Revised January 2005

NC7WZ126

TinyLogic® UHS Dual Buffer with 3-STATE Outputs

General Description

The NC7WZ126 is a Dual Non-Inverting Buffer with independent active HIGH enables for the 3-STATE outputs. The Ultra High Speed device is fabricated with advanced CMOS technology to achieve superior switching performance with high output drive while maintaining low static power dissipation over a broad V_{CC} operating range. The device is specified to operate over the 1.65V to 5.5V V_{CC} operating range. The inputs and outputs are high impedance when V_{CC} is 0V. Inputs tolerate voltages up to 5.5V independent of V_{CC} operating range. Outputs tolerate voltages above V_{CC} when in the 3-STATE condition.

Features

- Space saving US8 surface mount package
- MicroPak™ Pb-Free leadless package
- Ultra High Speed; t_{PD} 2.6 ns Typ into 50 pF at 5V V_{CC}
- High Output Drive; ±24 mA at 3V V_{CC}
- Broad V_{CC} Operating Range: 1.65V to 5.5V
- Matches the performance of LCX when operated at 3.3V V_{CC}
- Power down high impedance inputs/outputs
- Overvoltage tolerant inputs facilitate 5V to 3V translation
- Outputs are overvoltage tolerant in 3-STATE mode
- Patented noise/EMI reduction circuitry implemented

Ordering Code:

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7WZ126K8X	MAB08A	WZ26	8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide	3k Units on Tape and Reel
NC7WZ126L8X	MAC08A	T6	Pb-Free 8-Lead MicroPak, 1.6 mm Wide	5k Units on Tape and Reel

Pb-Free package per JEDEC J-STD-020B.

Logic Symbol



Pin Descriptions

Pin Names	Description
OE _n	Enable Inputs for 3-STATE Outputs
A _n	Inputs
Y _n	3-STATE Outputs

Function Table


Inputs		Output
OE	A _n	Y _n
H	L	L
H	H	H
L	L	Z
L	H	Z

H = HIGH Logic Level

L = LOW Logic Level


Z = 3-STATE

Connection Diagrams



(Top View)

Pad Assignments for MicroPak



(Top Thru View)

NC7WZ126 TinyLogic® UHS Dual Buffer with 3-STATE Outputs

Absolute Maximum Ratings ^(Note 1)						Recommended Operating Conditions ^(Note 3)		
Supply Voltage (V_{CC})			-0.5V to +7.0V			Supply Voltage Operating (V_{CC})	1.65V to 5.5V	
DC Input Voltage (V_{IN}) ^(Note 2)			-0.5V to +7.0V			Supply Voltage Data Retention (V_{CC})	1.5V to 5.5V	
DC Output Voltage (V_{OUT})			-0.5V to +7.0V			Input Voltage (V_{IN})	0V to 5.5V	
DC Input Diode Current (I_{IK})						Output Voltage (V_{OUT})		
@ $V_{IN} < 0V$			-50 mA			Active State	0V to V_{CC}	
DC Output Diode Current (I_{OK})						3-State	0V to 5.5V	
@ $V_{OUT} < 0V$			-50 mA			Operating Temperature (T_A)	-40°C to +85°C	
DC Output Source/Sink Current (I_{OUT})			±50 mA			Input Rise and Fall Time (t_r, t_f)		
DC V_{CC}/GND Current (I_{CC}/I_{GND})			±100 mA			$V_{CC} = 1.8V, 0.15V, 2.5V \pm 0.2V$	0 ns/V to 20 ns/V	
Storage Temperature Range (T_{STG})			-65°C to +150°C			$V_{CC} = 3.8V \pm 0.3V$	0 ns/V to 10 ns/V	
Junction Temperature under Bias (T_J)			+150°C			$V_{CC} = 5.0V \pm 0.5V$	0 ns/V to 5 ns/V	
Junction Lead Temperature (T_L)						Thermal Resistance (θ_{JA})	250°C/W	
(Soldering, 10 seconds)			+260°C					
Power Dissipation (P_D) @ +85°C			250 mW					
Note 1: Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside datasheet specifications.								
Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.								
Note 3: Unused inputs must be held HIGH or LOW. They may not float.								
DC Electrical Characteristics								
Symbol	Parameter	V_{CC} (V)	$T_A = +25^\circ C$		$T_A = -40^\circ C$ to $+85^\circ C$		Unit	Conditions
			Min	Typ	Max	Min		
V_{IH}	HIGH Level Input Voltage	1.65 to 1.95 2.3 to 5.5	0.75 V_{CC} 0.7 V_{CC}		0.75 V_{CC} 0.7 V_{CC}		V	
V_{IL}	LOW Level Input Voltage	1.65 to 1.95 2.3 to 5.5		0.25 V_{CC} 0.3 V_{CC}		0.25 V_{CC} 0.3 V_{CC}	V	
V_{OH}	HIGH Level Output Voltage	1.65 2.3 3.0 4.5	1.55 2.2 2.9 4.4	1.65 2.3 3.0 4.5	1.55 2.2 2.9 4.4		V	$V_{IN} = V_{IH}$ or V_{IL} $I_{OH} = -100 \mu A$
		1.65 2.3 3.0 4.5	1.29 1.9 2.4 3.8	1.52 2.15 2.80 4.20	1.29 1.9 2.4 3.8		V	$I_{OH} = -4 mA$ $I_{OH} = -8 mA$ $I_{OH} = -16 mA$ $I_{OH} = -24 mA$ $I_{OH} = -32 mA$
		1.65 2.3 3.0 4.5	0.0 0.0 0.0 0.0	0.10 0.10 0.10 0.10	0.10 0.10 0.10 0.10		V	$V_{IN} = V_{IH}$ or V_{IL} $I_{OL} = 100 \mu A$
		1.65 2.3 3.0 4.5		0.08 0.10 0.15 0.22	0.24 0.3 0.4 0.55		V	$I_{OL} = 4 mA$ $I_{OL} = 8 mA$ $I_{OL} = 16 mA$ $I_{OL} = 24 mA$ $I_{OL} = 32 mA$
I_{IN}	Input Leakage Current	0 to 5.5		±0.1	±1	μA	$V_{IN} = 5.5V, GND$	
I_{OZ}	3-STATE Output Leakage	1.65 to 5.5		±0.5	±5	μA	$V_{IN} = V_{IH}$ or V_{IL} $0 \leq V_{OUT} \leq 5.5V$	
I_{OFF}	Power Off Leakage Current	0.0		1	10	μA	V_{IN} or $V_{OUT} = 5.5V$	
I_{CC}	Quiescent Supply Current	1.65 to 5.5		1	10	μA	$V_{IN} = 5.5V, GND$	

Noise Characteristics

Symbol	Parameter	V _{CC} (V)	T _A = +25°C		Units	Conditions
			Typ	Max		
V _{OLP} (Note 4)	Quiet Output Maximum Dynamic V _{OL}	5.0		1.0	V	C _L = 50 pF
V _{OLV} (Note 4)	Quiet Output Minimum Dynamic V _{OL}	5.0		1.0	V	C _L = 50 pF
V _{OHV} (Note 4)	Quiet Output Minimum Dynamic V _{OH}	5.0		4.0	V	C _L = 50 pF
V _{IHD} (Note 4)	Minimum HIGH Level Dynamic Input Voltage	5.0		3.5	V	C _L = 50 pF
V _{ILD} (Note 4)	Maximum LOW Level Dynamic Input Voltage	5.0		1.5	V	C _L = 50 pF

Note 4: Parameter guaranteed by design.


AC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	T _A = +25°C			Units	Conditions	Figure Number
			Min	Typ	Max			
t _{PLH} t _{PHL}	Propagation Delay A _n to Y _n	1.8 ± 0.15	2.0	12.0	2.0	13.0	ns	C _L = 15 pF RD = 1 MΩ S ₁ = OPEN
		2.5 ± 0.2	1.0	7.5	1.0	8.0		
		3.3 ± 0.3	0.8	5.2	0.8	5.5		
		5.0 ± 0.5	0.5	4.5	0.5	4.8		
t _{PLH} t _{PHL}	Propagation Delay A _n to Y _n	3.3 ± 0.3	1.2	5.7	1.2	6.0	ns	C _L = 50 pF RD = 500Ω S ₁ = OPEN
		5.0 ± 0.5	0.8	5.0	0.8	5.3		
t _{OSLH} t _{OSHL}	Output to Output Skew (Note 5)	3.3 ± 0.3		1.0		1.0	ns	C _L = 50 pF RD = 500Ω S ₁ = OPEN
		5.0 ± 0.5		0.8		0.8		
t _{PZL} t _{PZH}	Output Enable Time	1.8 ± 0.15	3.0	14.0	3.0	15.0	ns	C _L = 50 pF RD, RU = 500Ω S ₁ = GND for t _{PZH} S ₁ = V _I for t _{PZL} V _I = 2 × V _{CC}
		2.5 ± 0.2	1.8	8.5	1.8	9.0		
		3.3 ± 0.3	1.2	6.2	1.2	6.5		
		5.0 ± 0.5	0.8	5.5	0.8	5.8		
t _{PLZ} t _{PHZ}	Output Disable Time	1.8 ± 0.15	2.5	12.0	2.5	13.0	ns	C _L = 50 pF RD, RU = 500Ω S ₁ = GND for t _{PHZ} S ₁ = V _I for t _{PLZ} V _I = 2 × V _{CC}
		2.5 ± 0.2	1.5	8.0	1.5	8.5		
		3.3 ± 0.3	0.8	5.7	0.8	6.0		
		5.0 ± 0.5	0.3	4.7	0.3	5.0		
C _{IN} C _{OUT}	Input Capacitance Output Capacitance	0 5.0	2.5 4				pF	
C _{PD}	Power Dissipation Capacitance	3.3 5.0	10 12				pF	(Note 6)
								Figure 2

Note 5: Parameter guaranteed by design. t_{OSLH} = |t_{PLHmax} - t_{PLHmin}|; t_{OSHL} = |t_{PHLmax} - t_{PHLmin}|.

Note 6: C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (See Figure 2.) C_{PD} is related to I_{CCD} dynamic operating current by the expression:
I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC} static).



AC Loading and Waveforms



C_L includes load and stray capacitance

Input PRR = 1.0 MHz, t_w = 500 ns

FIGURE 1. AC Test Circuit

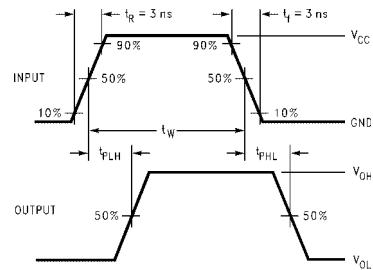

Input = AC Waveform; $t_r = t_f = 1.8$ ns;

PRR = 10 MHz; Duty Cycle = 50%

FIGURE 2. I_{CCD} Test Circuit

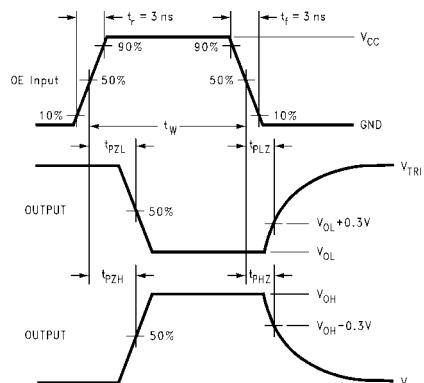



FIGURE 3. AC Waveforms

Tape and Reel Specification

TAPE FORMAT for US8

Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
K8X	Leader (Start End)	125 (typ)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed


TAPE DIMENSIONS inches (millimeters)

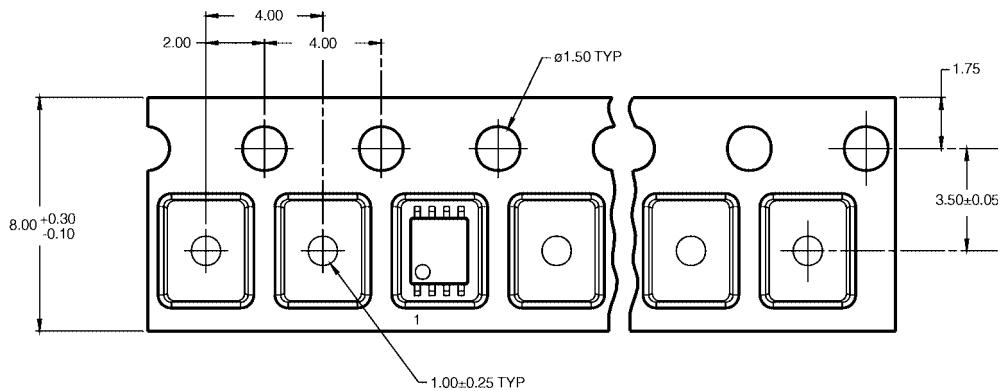


TAPE FORMAT for MicroPak

Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
L8X	Leader (Start End)	125 (typ)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed



TAPE DIMENSIONS inches (millimeters)

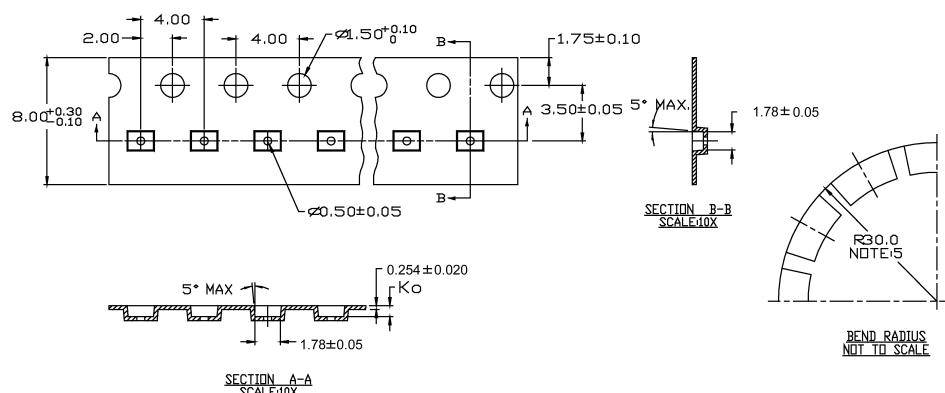



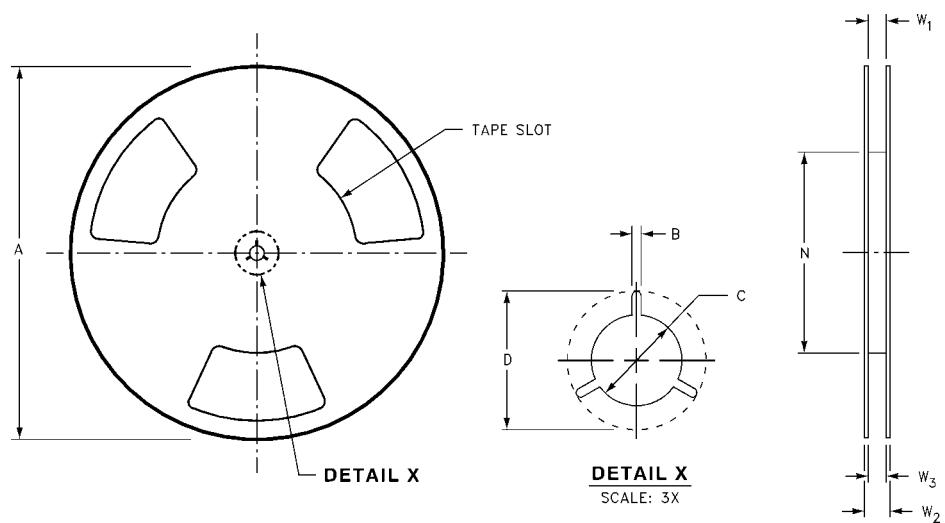
Tape and Reel Specification (Continued)**REEL DIMENSIONS** inches (millimeters)

Tape Size	A	B	C	D	N	W1	W2	W3
8 mm	7.0 (177.8)	0.059 (1.50)	0.512 (13.00)	0.795 (20.20)	2.165 (55.00)	$0.331 + 0.059/-0.000$ (8.40 + 1.50/-0.00)	0.567 (14.40)	$W1 + 0.078/-0.039$ $(W1 + 2.00/-1.00)$

Physical Dimensions inches (millimeters) unless otherwise noted

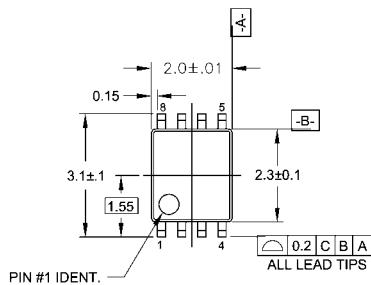

LAND PATTERN RECOMMENDATION

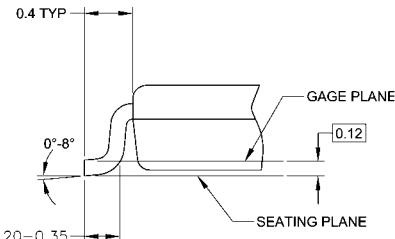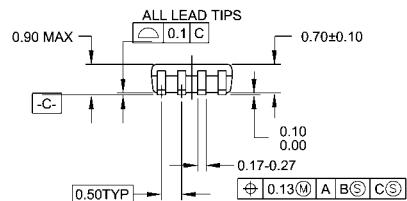

NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-187
 - B. DIMENSIONS ARE IN MILLIMETERS.
 - C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
 - D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.


DETAIL A

MAB08AREVC

**8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide
Package Number MAB08A**

NC7WZ126 TinyLogic® UHS Dual Buffer with 3-STATE Outputs

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

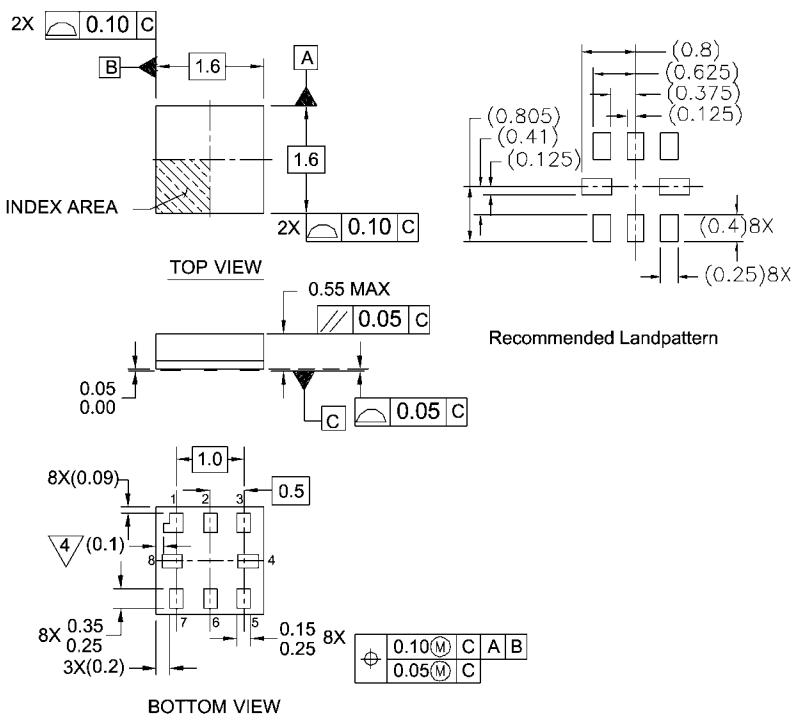

Notes:

1. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y.14M-1994

PIN 1 FLAG, END OF PACKAGE OFFSET.

MAC08AREVC

Pb-Free 8-Lead MicroPak, 1.6 mm Wide
Package Number MAC08A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com