


SMD Efficient Fast Recovery Rectifier



CEFC301 Thru CEFC305

Reverse Voltage: 50 - 600 Volts
Forward Current: 3.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Super fast recovery time for high efficient
- Built-in strain relief
- Low forward voltage drop

Mechanical Data

- Case: JEDEC DO-214AB molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.21 gram

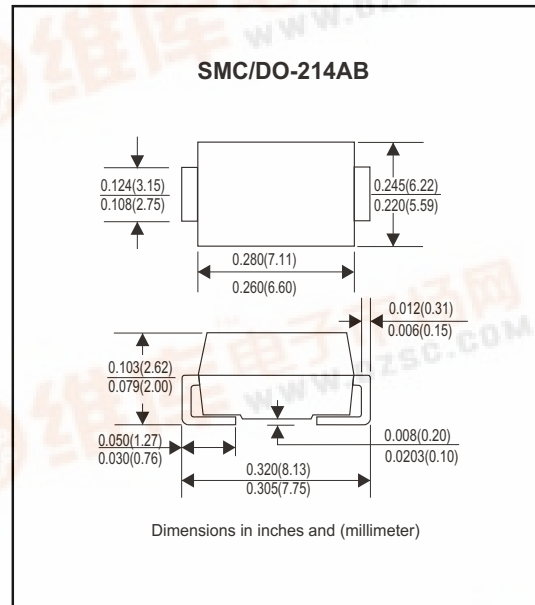

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CEFC 301	CEFC 302	CEFC 303	CEFC 304	CEFC 305	Unit
Max. Repetitive Peak Reverse Voltage	VRRM	50	100	200	400	600	V
Max. DC Blocking Voltage	VDC	50	100	200	400	600	V
Max. RMS Voltage	VRMS	35	70	140	280	420	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rate load (JEDEC method)	IFSM	75					A
Max. Average Forward Current	Io	3.0					A
Max. Instantaneous Forward Current at 3.0 A	VF	0.875		1.1		1.25	V
Reverse recovery time	Trr	25		35		50	nS
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C Ta=100°C	IR	5.0 250					uA
Max. Thermal Resistance (Note 1)	RθJL	13					°C/W
Operating Junction Temperature	Tj	-55 to +150					°C
Storage Temperature	TSTG	-55 to +150					°C



Note 1: Thermal resistance from junction to lead P.C.B. Mounted on 8.0x8.0 mm copper pad areas.

Rating and Characteristic Curves (CEFC301 Thru CEFC305)

Fig. 1 - Reverse Characteristics

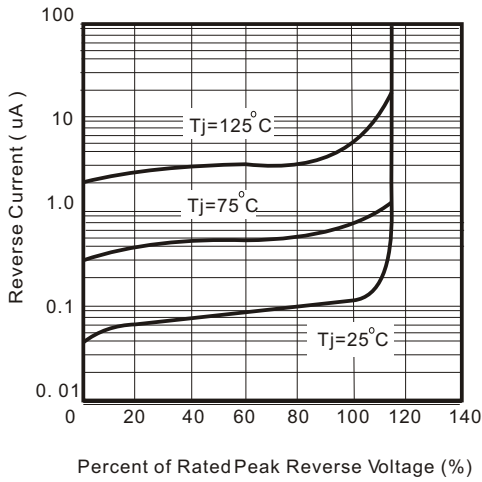


Fig.2 - Forward Characteristics

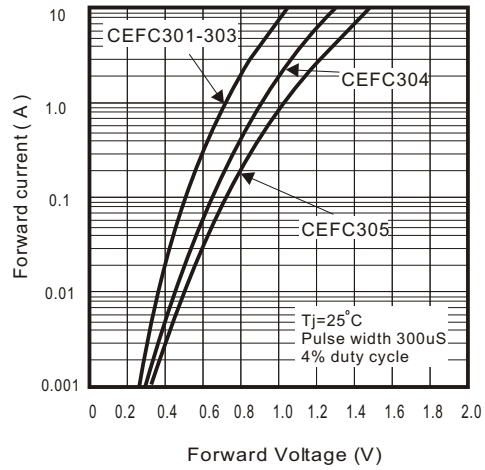


Fig. 3 - Junction Capacitance

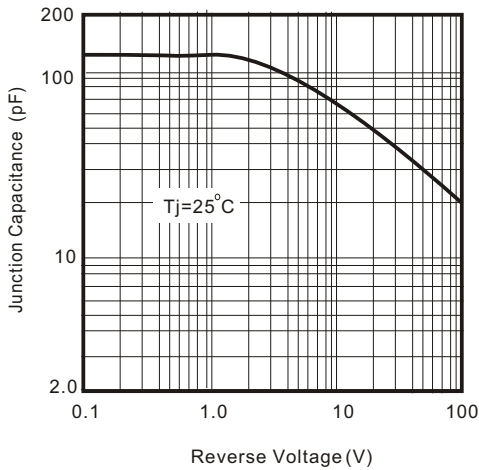


Fig. 4 - Non Repetitive Forward Surge Current

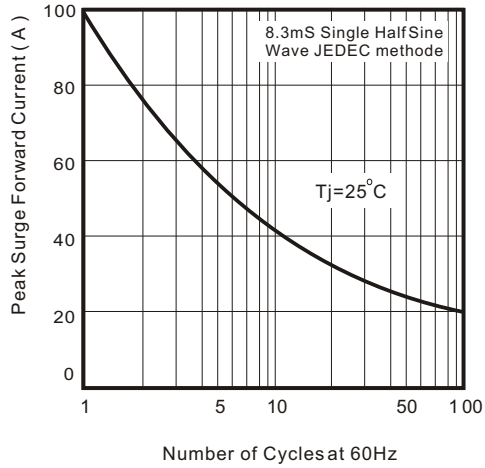


Fig. 5 - Test Circuit Diagram and Reverse Recovery Time Characteristics


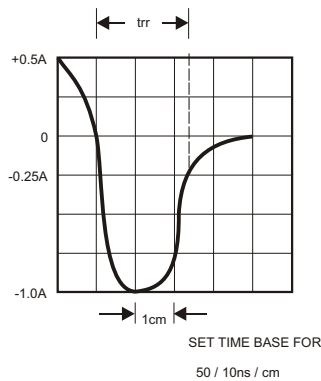


Fig. 6 - Current Derating Curve

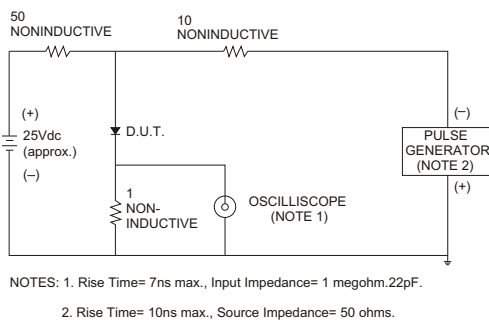