




HCC/HCF4019B

QUAD AND/OR SELECT GATE

- MEDIUM SPEED OPERATION : $t_{PHL} = t_{PLH} = 60\text{ns}$ (typ.) AT $C_L = 50\text{pF}$, $V_{DD} = 10\text{V}$
- STANDARDIZED, SYMMETRICAL OUTPUT CHARACTERISTICS
- QUIESCENT CURRENT SPECIFIED TO 20V FOR HCC DEVICE
- 5V, 10V, AND 15V PARAMETRIC RATINGS
- INPUT CURRENT OF 100nA AT 18V AND 25°C FOR HCC DEVICE
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC TENTATIVE STANDARD N°. 13A, "STANDARD SPECIFICATIONS FOR DESCRIPTION OF "B" SERIES CMOS DEVICES"



PIN CONNECTIONS

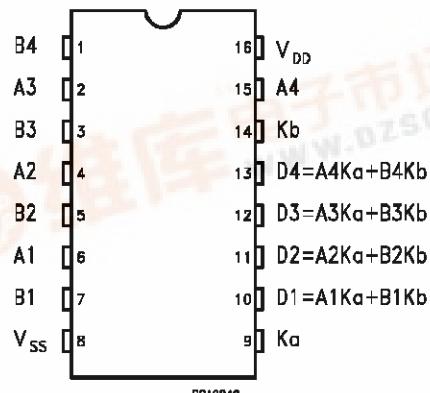

DESCRIPTION

The HCC4019B (extended temperature range) and HCF4019B (intermediate temperature range) are monolithic integrated circuit, available in 16-lead dual in-line plastic or ceramic package and plastic micro package.

The HCC/HCF4019B types are comprised of four AND/OR select gate configurations, each consisting of two 2-input AND gates driving a single 2-input OR gate. Selection is accomplished by control bits K_a and K_b . In addition to selection of either channel A or channel B information, the control bits can be applied simultaneously to accomplish the logical $A+B$ function.

HCC/HCF4019B

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|------------|---|--------------------------------|----------|
| V_{DD}^* | Supply Voltage : HCC Types HCF Types | – 0.5 to + 20 – 0.5 to + 18 | V V |
| V_i | Input Voltage | – 0.5 to V_{DD} + 0.5 | V |
| I_I | DC Input Current (any one input) | ± 10 | mA |
| P_{tot} | Total Power Dissipation (per package) Dissipation per Output Transistor for T_{op} = Full Package-temperature Range | 200 100 | mW mW |
| T_{op} | Operating Temperature : HCC Types HCF Types | – 55 to + 125 – 40 to + 85 | °C °C |
| T_{stg} | Storage Temperature | – 65 to + 150 | °C |


Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for external periods may affect device reliability.

* All voltage values are referred to V_{SS} pin voltage.

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Value | Unit |
|----------|--|-------------------------------|----------|
| V_{DD} | Supply Voltage : HCC Types HCF Types | 3 to 18 3 to 15 | V V |
| V_i | Input Voltage | 0 to V_{DD} | V |
| T_{op} | Operating Temperature : HCC Types HCF Types | – 55 to + 125 – 40 to + 85 | °C °C |

LOGIC DIAGRAMS

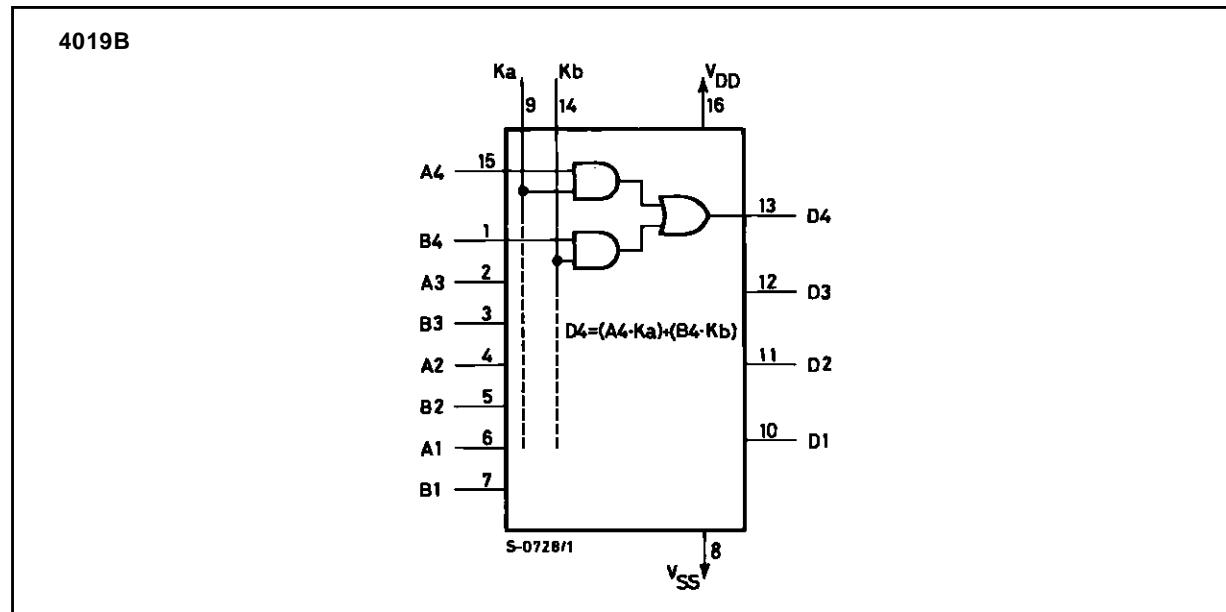

TRUTH TABLE

| Ka | Kb | An | Bn | DN |
|----|----|----|----|----|
| 1 | X | 1 | X | 1 |
| 1 | X | 0 | X | 0 |
| X | 1 | X | 1 | 1 |
| X | 1 | X | 0 | 0 |
| 0 | 0 | X | X | 0 |

X = Don't care.

HCC/HCF4019B

STATIC ELECTRICAL CHARACTERISTICS (over recommended operating conditions)

| Symbol | Parameter | Test Conditions | | | | Value | | | | | | Unit | | |
|-----------------|----------------------|-----------------------|-----------------------|---------------------------|------------------------|-------------------------------|-------------------------------|---------------------------|---------------------------|---------------------------|--------------------------------|--------|-----|----|
| | | V _I (V) | V _O (V) | I _{OL} (μA) | V _{DD} (V) | T _{Low} * Min. | T _{Low} * Max. | T _{25°C} Min. | T _{25°C} Typ. | T _{25°C} Max. | T _{High} * Min. | | | |
| I _L | Quiescent Current | HCC Types | 0/ 5 | | 5 | | 1 | | 0.02 | 1 | | 30 | μA | |
| | | | 0/10 | | 10 | | 2 | | 0.02 | 2 | | 60 | | |
| | | | 0/15 | | 15 | | 4 | | 0.02 | 4 | | 120 | | |
| | | | 0/20 | | 20 | | 20 | | 0.04 | 20 | | 600 | | |
| | | HCF Types | 0/ 5 | | 5 | | 4 | | 0.02 | 4 | | 30 | | |
| | | | 0/10 | | 10 | | 8 | | 0.02 | 8 | | 60 | | |
| | | | 0/15 | | 15 | | 16 | | 0.02 | 16 | | 120 | | |
| | | Output High Voltage | 0/ 5 | < 1 | 5 | 4.95 | | 4.95 | | | 4.95 | | V | |
| | | | 0/10 | < 1 | 10 | 9.95 | | 9.95 | | | 9.95 | | | |
| | | | 0/15 | < 1 | 15 | 14.95 | | 14.95 | | | 14.95 | | | |
| V _{OL} | Output Low Voltage | 5/0 | < 1 | 5 | | 0.05 | | | 0.05 | | 0.05 | | V | |
| | | 10/0 | < 1 | 10 | | 0.05 | | | 0.05 | | 0.05 | | | |
| | | 15/0 | < 1 | 15 | | 0.05 | | | 0.05 | | 0.05 | | | |
| V _{IH} | Input High Voltage | 0.5/4.5 | < 1 | 5 | 3.5 | | 3.5 | | | 3.5 | | | V | |
| | | 1/9 | < 1 | 10 | 7 | | 7 | | | 7 | | | | |
| | | 1.5/13.5 | < 1 | 15 | 11 | | 11 | | | 11 | | | | |
| V _{IL} | Input Low Voltage | 4.5/0.5 | < 1 | 5 | | 1.5 | | | 1.5 | | 1.5 | | V | |
| | | 9/1 | < 1 | 10 | | 3 | | | 3 | | 3 | | | |
| | | 13.5/1.5 | < 1 | 15 | | 4 | | | 4 | | 4 | | | |
| I _{OH} | Output Drive Current | HCC Types | 0/ 5 | 2.5 | | 5 | - 2 | | - 1.6 | - 3.2 | | - 1.15 | mA | |
| | | | 0/ 5 | 4.6 | | 5 | - 0.64 | | - 0.51 | - 1 | | - 0.36 | | |
| | | | 0/10 | 9.5 | | 10 | - 1.6 | | - 1.3 | - 2.6 | | - 0.9 | | |
| | | | 0/15 | 13.5 | | 15 | - 4.2 | | - 3.4 | - 6.8 | | - 2.4 | | |
| | | HCF Types | 0/ 5 | 2.5 | | 5 | - 1.53 | | - 1.36 | - 3.2 | | - 1.1 | | |
| | | | 0/ 5 | 4.6 | | 5 | - 0.52 | | - 0.44 | - 1 | | - 0.36 | | |
| | | | 0/10 | 9.5 | | 10 | - 1.3 | | - 1.1 | - 2.6 | | - 0.9 | | |
| | | | 0/15 | 13.5 | | 15 | - 3.6 | | - 3.0 | - 6.8 | | - 2.4 | | |
| | | | 0/ 5 | 0.4 | | 5 | 0.64 | | 0.51 | 1 | | 0.36 | | |
| | | | 0/10 | 0.5 | | 10 | 1.6 | | 1.3 | 2.6 | | 0.9 | | |
| I _{OL} | Output Sink Current | HCC Types | 0/15 | 1.5 | | 15 | 4.2 | | 3.4 | 6.8 | | 2.4 | mA | |
| | | | 0/ 5 | 0.4 | | 5 | 0.52 | | 0.44 | 1 | | 0.36 | | |
| | | | 0/10 | 0.5 | | 10 | 1.3 | | 1.1 | 2.6 | | 0.9 | | |
| | | HCF Types | 0/15 | 1.5 | | 15 | 3.6 | | 3.0 | 6.8 | | 2.4 | | |
| | | | 0/18 | | | 18 | | ± 0.1 | | ±10 ⁻⁵ | ± 0.1 | | ± 1 | μA |
| | | | Any Input | | | 15 | | ± 0.3 | | ±10 ⁻⁵ | ± 0.3 | | ± 1 | |
| C _I | Input Capacitance | All A and B Inputs | | | | | | | 5 | 7.5 | | | pF | |
| | | Ka and Kb Inputs | | | | | | | 10 | 15 | | | pF | |

* T_{Low}= - 55°C for HCC device : - 40°C for HCF device.


* T_{High}= + 125°C for HCC device : + 85°C for HCF device.

The Noise Margin for both "1" and "0" level is : 1V min. with V_{DD} = 5V, 2V min. with V_{DD} = 10V, 2.5 V min. with V_{DD} = 15V.


DYNAMIC ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^\circ C$, $C_L = 50 \text{ pF}$, $R_L = 200 \text{ k}\Omega$, typical temperature coefficient for all V_{DD} values is $0.3\text{ }^\circ/\text{C}$, all input rise and fall times = 20 ns)

| Symbol | Parameter | Test Conditions | | Value | | | Unit |
|--------------------|------------------------|-----------------|--------------|-------|------|------|------|
| | | | V_{DD} (V) | Min. | Typ. | Max. | |
| t_{PLH}, t_{PHL} | Propagation Delay Time | | 5 | | 150 | 300 | ns |
| | | | 10 | | 60 | 120 | |
| | | | 15 | | 50 | 100 | |
| t_{TLH}, t_{THL} | Transition Time | | 5 | | 100 | 200 | ns |
| | | | 10 | | 50 | 100 | |
| | | | 15 | | 40 | 80 | |


Typical Output Low (sink) Current Characteristics.

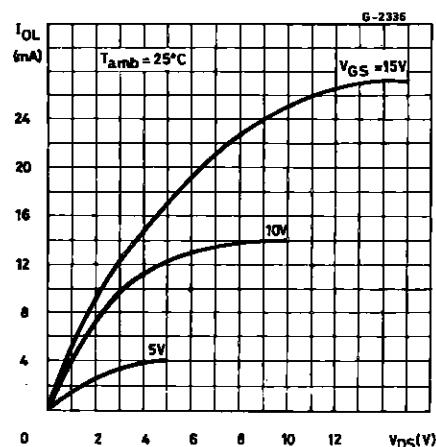


Minimum Output Low (sink) Current Characteristics.

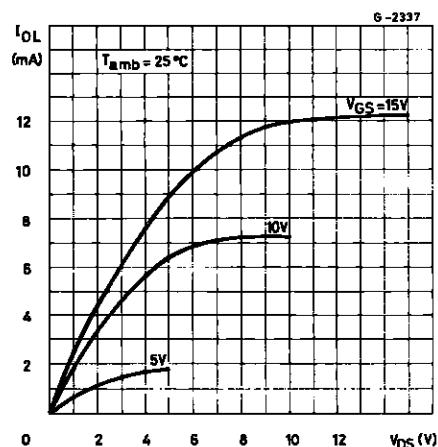

Typical Output High (source) Current Characteristics.

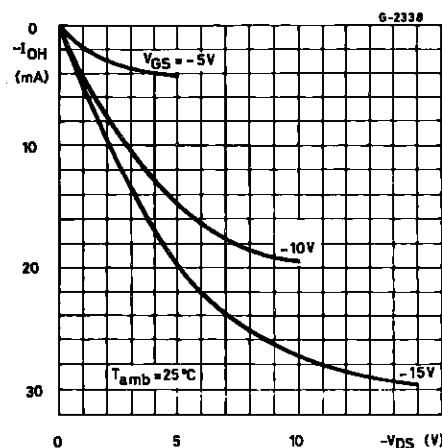


Minimum Output High (source) Current Characteristics.

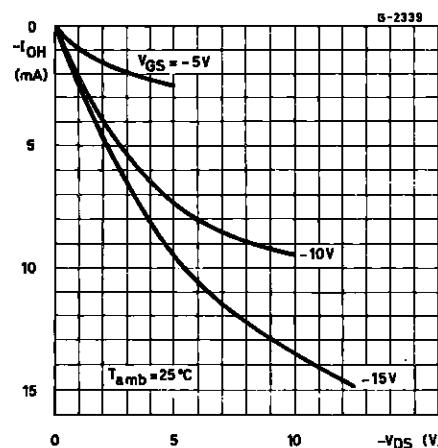


HCC/HCF4019B

TYPICAL APPLICATIONS

AND-OR SELECTED GATING.

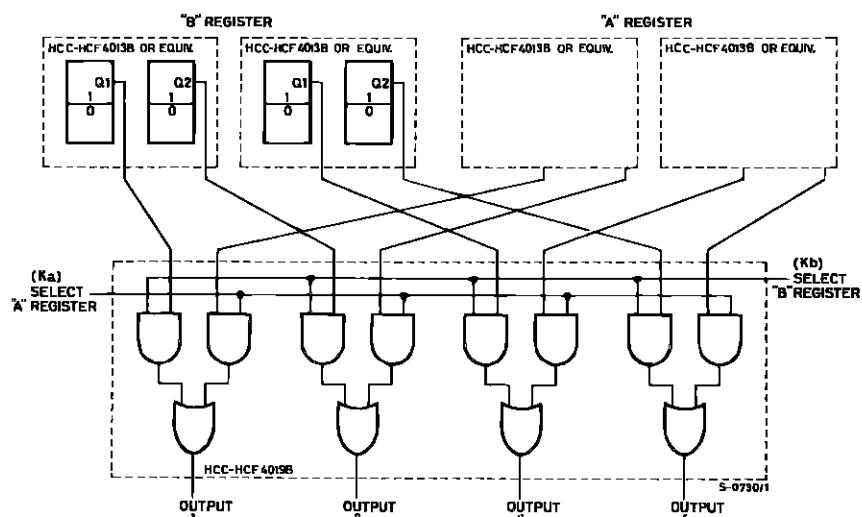


SHIFT LEFT SHIFT RIGHT REGISTER.

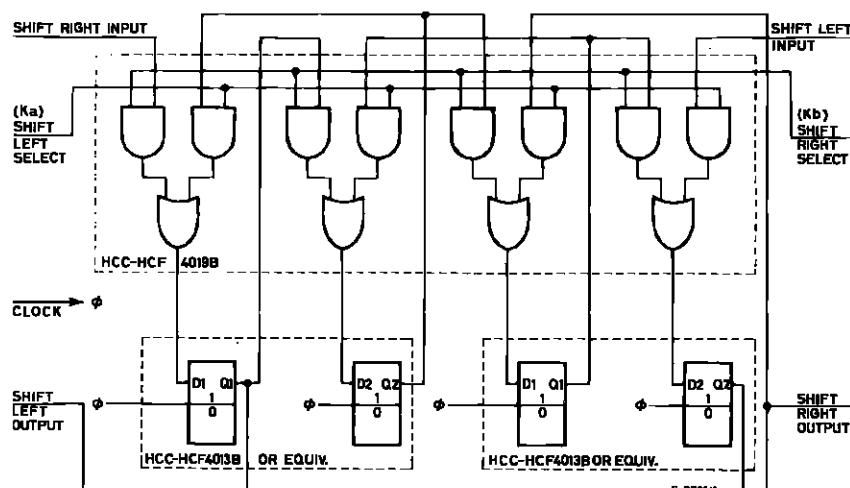


TYPICAL APPLICATIONS (continued)

TRUE COMPLEMENT SELECTOR.

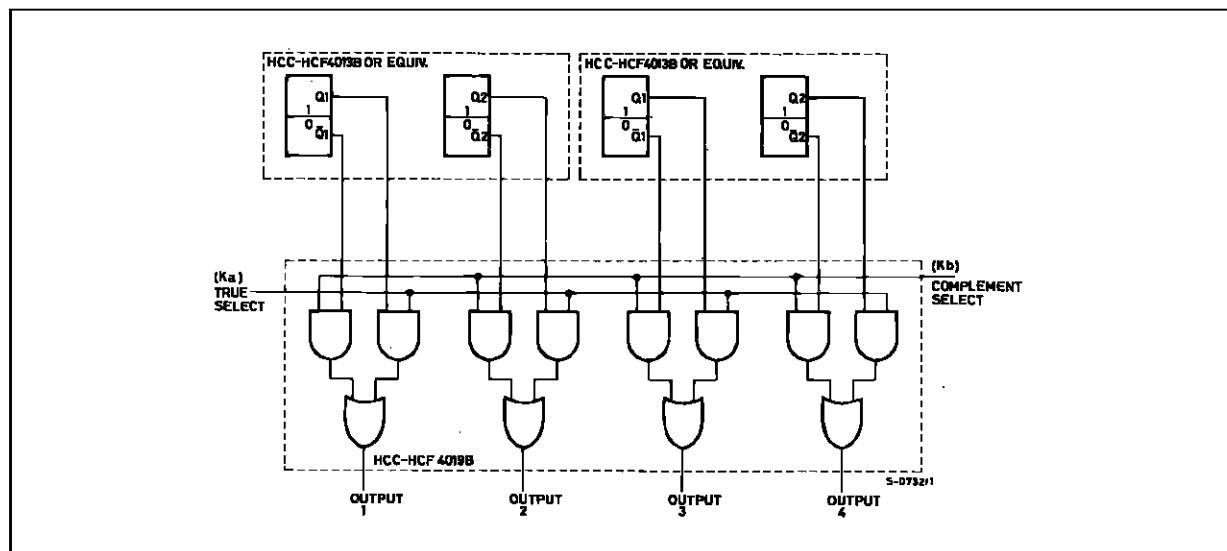

AND-OR EXCLUSIVE-OR SELECTOR.

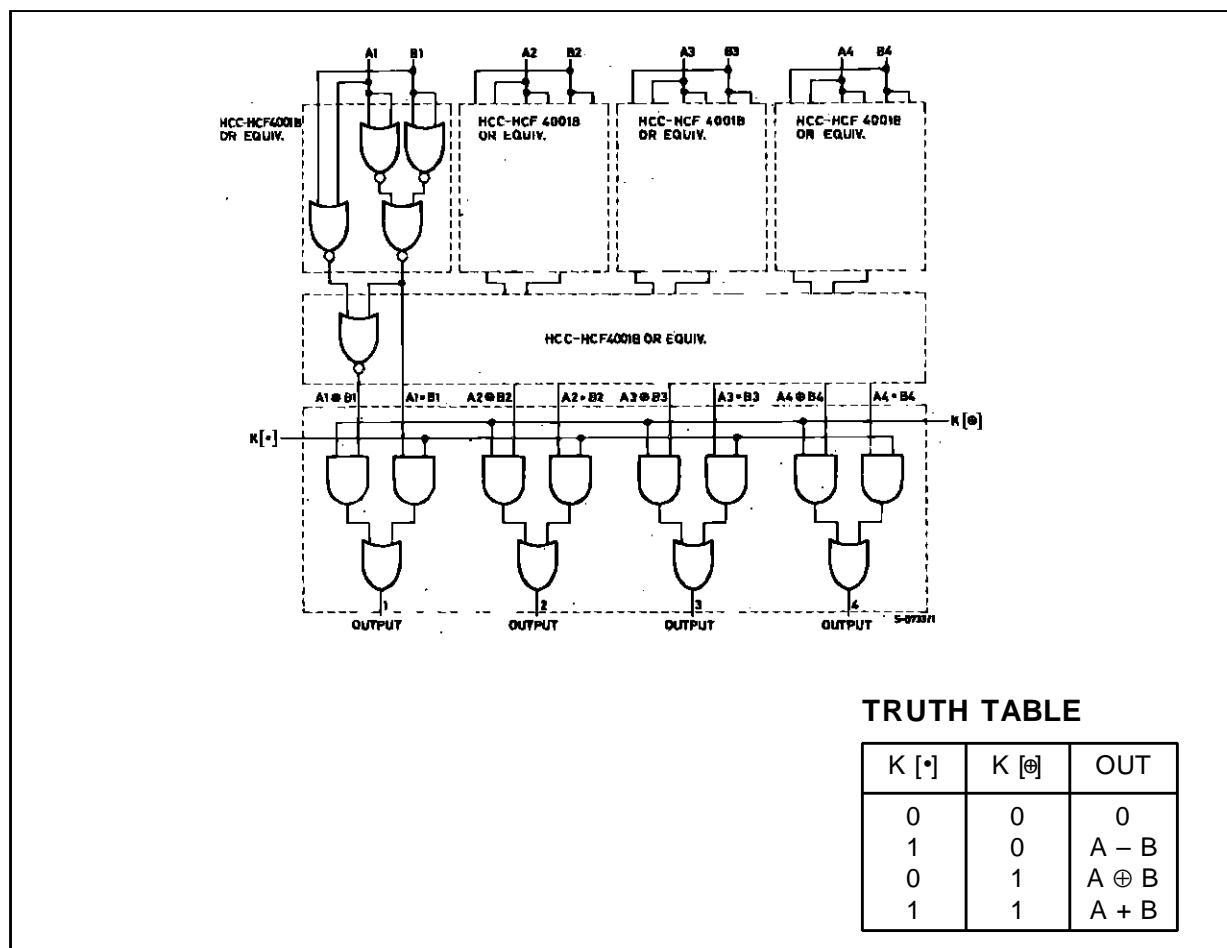


TRUTH TABLE

| K [•] | K [•] | OUT |
|-------|-------|--------------|
| 0 | 0 | 0 |
| 1 | 0 | A - B |
| 0 | 1 | A \oplus B |
| 1 | 1 | A + B |


HCC/HCF4019B

TEST CIRCUITS


Quiescent Device Current.

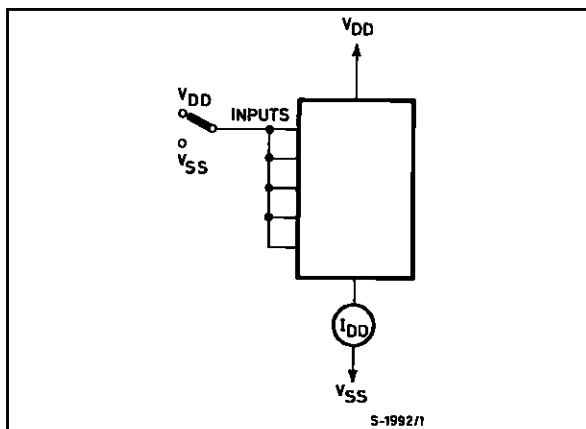


Input Voltage.

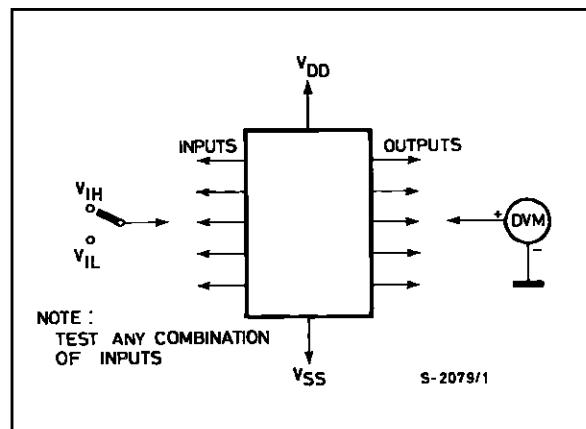

Input Leakage Current.

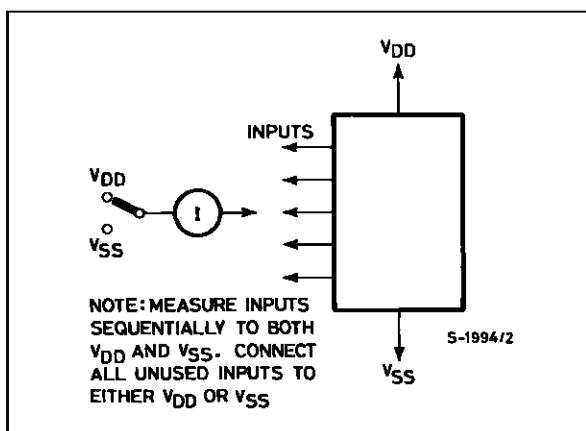


Dynamic Power Dissipation.

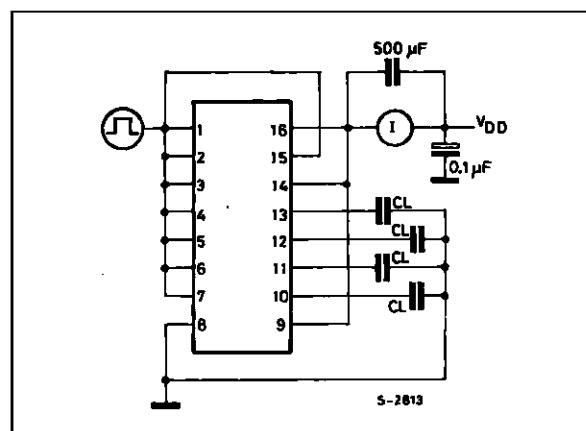


Plastic DIP16 (0.25) MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|-------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| a1 | 0.51 | | | 0.020 | | |
| B | 0.77 | | 1.65 | 0.030 | | 0.065 |
| b | | 0.5 | | | 0.020 | |
| b1 | | 0.25 | | | 0.010 | |
| D | | | 20 | | | 0.787 |
| E | | 8.5 | | | 0.335 | |
| e | | 2.54 | | | 0.100 | |
| e3 | | 17.78 | | | 0.700 | |
| F | | | 7.1 | | | 0.280 |
| I | | | 5.1 | | | 0.201 |
| L | | 3.3 | | | 0.130 | |
| Z | | | 1.27 | | | 0.050 |

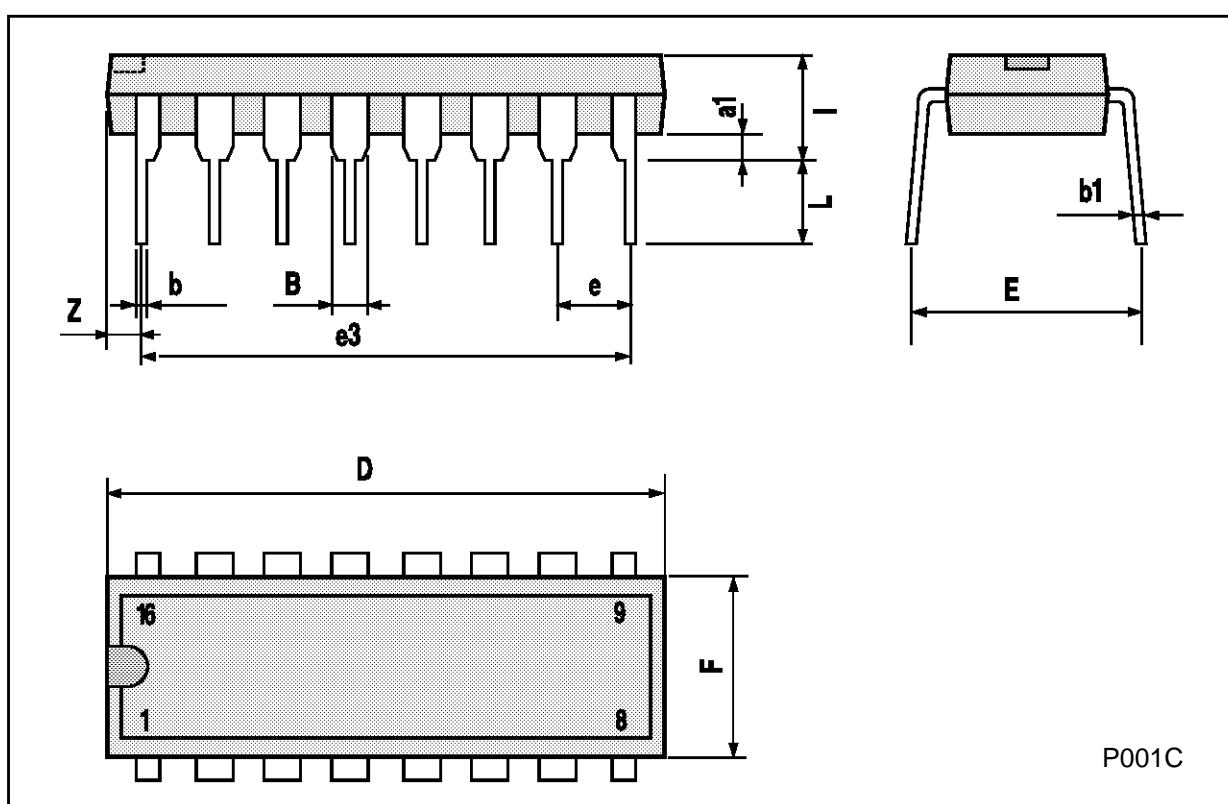

Ceramic DIP16/1 MECHANICAL DATA


| DIM. | mm | | | inch | | |
|------|------|-------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | | 20 | | | 0.787 |
| B | | | 7 | | | 0.276 |
| D | | 3.3 | | | 0.130 | |
| E | 0.38 | | | 0.015 | | |
| e3 | | 17.78 | | | 0.700 | |
| F | 2.29 | | 2.79 | 0.090 | | 0.110 |
| G | 0.4 | | 0.55 | 0.016 | | 0.022 |
| H | 1.17 | | 1.52 | 0.046 | | 0.060 |
| L | 0.22 | | 0.31 | 0.009 | | 0.012 |
| M | 0.51 | | 1.27 | 0.020 | | 0.050 |
| N | | | 10.3 | | | 0.406 |
| P | 7.8 | | 8.05 | 0.307 | | 0.317 |
| Q | | | 5.08 | | | 0.200 |

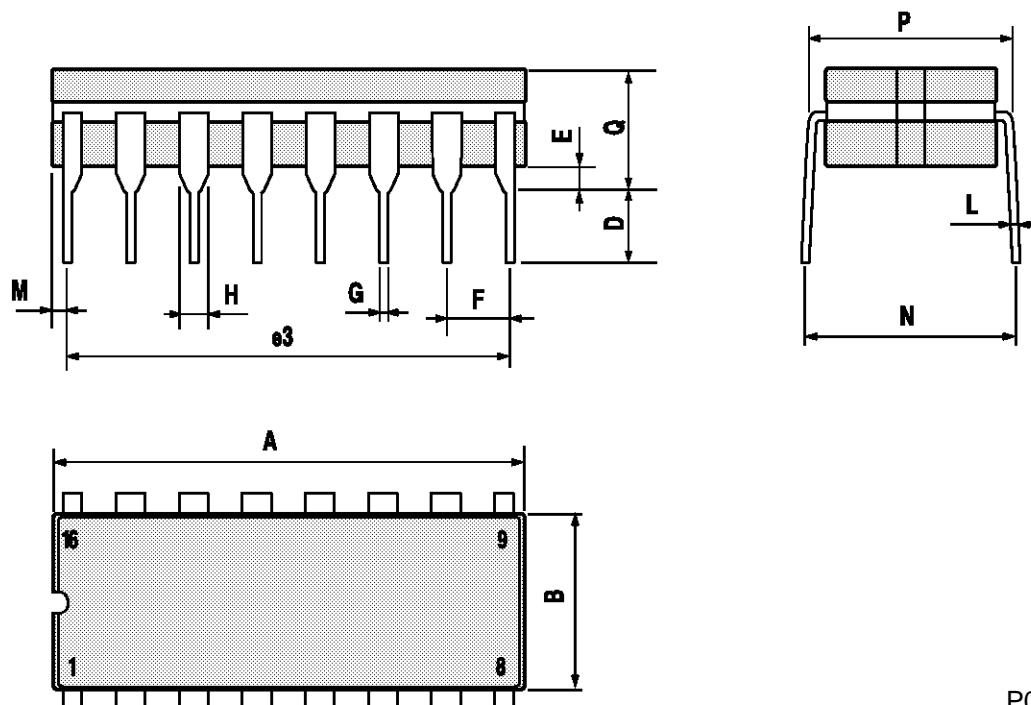

P053D

SO16 (Narrow) MECHANICAL DATA


| DIM. | mm | | | inch | | |
|------|------|------------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | | 1.75 | | | 0.068 |
| a1 | 0.1 | | 0.2 | 0.004 | | 0.007 |
| a2 | | | 1.65 | | | 0.064 |
| b | 0.35 | | 0.46 | 0.013 | | 0.018 |
| b1 | 0.19 | | 0.25 | 0.007 | | 0.010 |
| C | | 0.5 | | | 0.019 | |
| c1 | | 45° (typ.) | | | | |
| D | 9.8 | | 10 | 0.385 | | 0.393 |
| E | 5.8 | | 6.2 | 0.228 | | 0.244 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 8.89 | | | 0.350 | |
| F | 3.8 | | 4.0 | 0.149 | | 0.157 |
| G | 4.6 | | 5.3 | 0.181 | | 0.208 |
| L | 0.5 | | 1.27 | 0.019 | | 0.050 |
| M | | | 0.62 | | | 0.024 |
| S | | 8° (max.) | | | | |

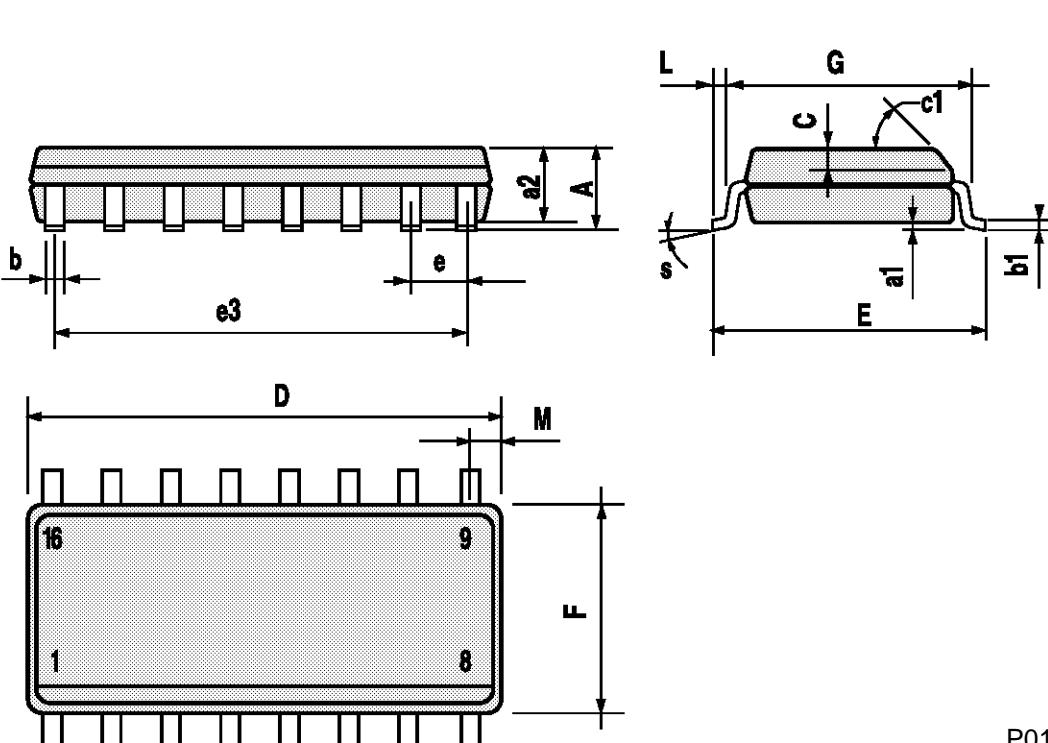

P013H

PLCC20 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 9.78 | | 10.03 | 0.385 | | 0.395 |
| B | 8.89 | | 9.04 | 0.350 | | 0.356 |
| D | 4.2 | | 4.57 | 0.165 | | 0.180 |
| d1 | | 2.54 | | | 0.100 | |
| d2 | | 0.56 | | | 0.022 | |
| E | 7.37 | | 8.38 | 0.290 | | 0.330 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 5.08 | | | 0.200 | |
| F | | 0.38 | | | 0.015 | |
| G | | | 0.101 | | | 0.004 |
| M | | 1.27 | | | 0.050 | |
| M1 | | 1.14 | | | 0.045 | |

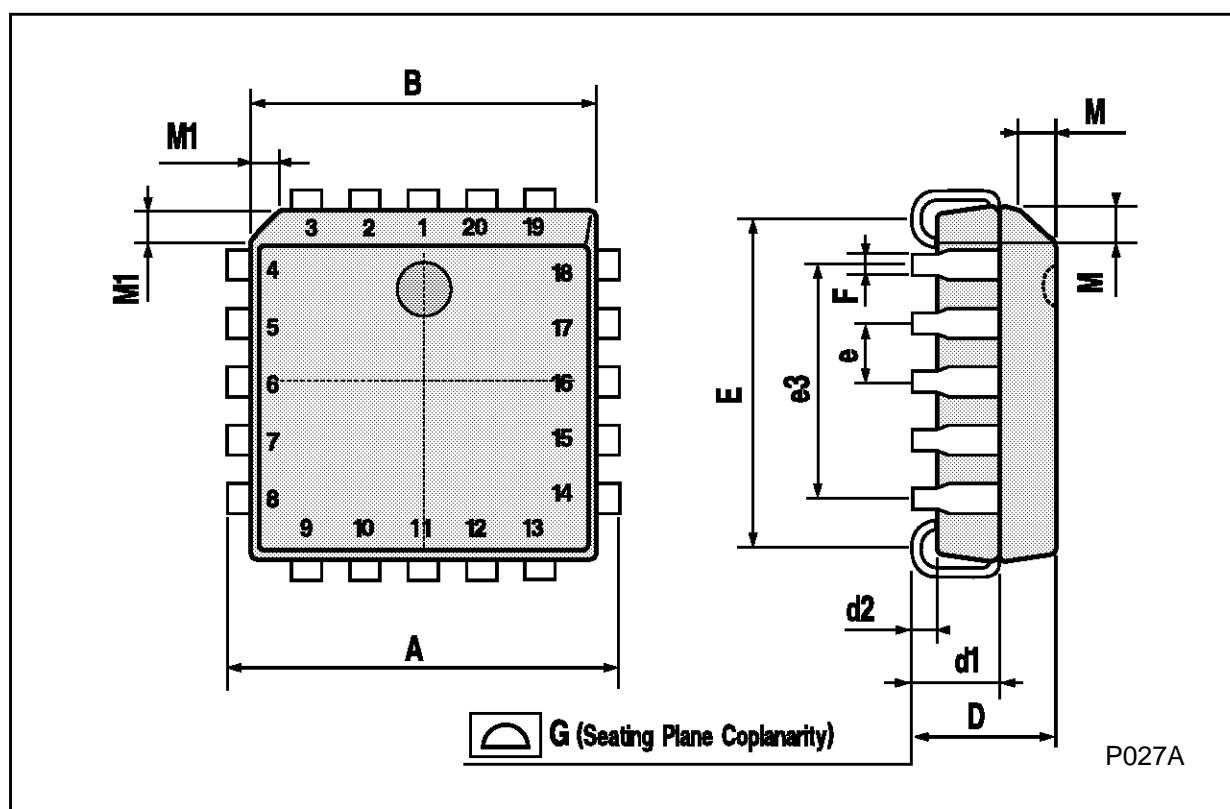

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A