

**Advanced Product Information****June 2002**

(1 of 2)

**High Dynamic Range
Low-Noise GaAs FET****Features**


- ☐ Low-Noise Figure from 0.8 to 2.0 GHz
- ☐ High Gain
- ☐ High Intercept Point
- ☐ Highly Stable
- ☐ Easily Matched to 50Ω
- ☐ 70 mil Package
- ☐ PHEMT Material

Applications

- ☐ Cellular Base Stations
- ☐ PCS Base Stations
- ☐ Industrial Data Networks

Description

Celeritek's CFB0303 is a high performance GaAs PHEMT with 600 μm gate width and 0.25 μm gate length. The low noise figure and high intercept point of this device makes it well suited for use as the low-noise amplifier of the

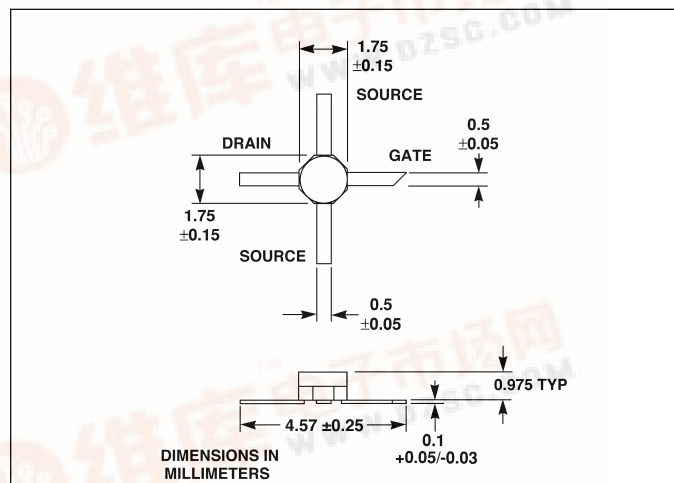

base station receiver in PCS, Japanese PHS, AMPS, GSM and other communications systems. The CFB0303 is in an industry-standard 70 mil package. It is surface mountable and available in tape and reel.

Electrical Specifications (TA = 25°C, 2 GHz)

Parameters	Conditions	Min	Typ	Max	Units
V_d = 4V, I_d = 75 mA					
Noise Figure ²			0.5	0.6	dB
Associated Gain ²	@ Noise Figure	19.0	20.0	22.7	dB
P _{out} ^{1, 3}	P ₋₁	20.0	21.0	22.0	dBm
IP ₃ ³	+5 dBm P _{OUT} /Tone	32	34		dBm
I _d ³	@ P ₋₁		83		mA
Transconductance	V _{ds} = 4 V, V _{gs} = 0 V		350		mho
Saturated Drain Current	V _{ds} = 4 V, V _{gs} = 0 V	80	140	240	mA
Pinchoff Voltages	V _{ds} = 4 V, I _{ds} = 1 mA		-0.3		V
Thermal Resistance	@ T _{case} = 150°C liquid crystal test		200		°C/W

Notes: 1. @ T_{case} = 25°C. Derate 5 mW/°C for T_{case} > 25°C.

2. Input matched for low noise.

3. Matched for power transfer.

Typical Scattering Parameters (TA = 25°C, V_{DS} = 4 V, I_{DS} = 75 mA)

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	Mag	Ang	Mag (dB)	Ang	MAG (dB)	ANG	MAG	ANG
0.5	0.98	-24	8.47	160	0.02	77	0.33	-9
1.0	0.94	-44	8.20	147	0.03	69	0.32	-15
2.0	0.85	-80	7.30	118	0.05	51	0.27	-36
3.0	0.76	-112	6.30	94	0.07	37	0.25	-50
4.0	0.70	-134	5.60	74	0.08	29	0.24	-55
5.0	0.64	-154	5.13	54	0.09	19	0.23	-61



Typical Noise Parameters ($V_{ds} = 4\text{ V}$, $I_{ds} = 75\text{ mA}$)

Frequency (GHz)	F_{min}^1 (dB)	Gamma Opt		Rn/50
		Mag	Ang	
0.8	0.4	0.6	27	0.19
1.0	0.4	0.6	29	0.17
1.2	0.4	0.6	32	0.18
1.4	0.4	0.6	35	0.18
1.6	0.4	0.5	38	0.17
1.8	0.4	0.5	41	0.16
2.0	0.5	0.5	45	0.15
2.2	0.5	0.5	49	0.15
2.4	0.5	0.5	54	0.14
2.6	0.5	0.5	60	0.13

Note: 1. F_{min} values reflect the circuit losses in the test fixture when matched to optimum noise figure.

Absolute Maximum Ratings

Parameter	Symbol	Rating
Drain-Source Voltage	V_{ds}	+8V
Gate-Source Voltage	V_{gs}	-5V
Drain Current	I_{ds}	I_{dss}
Continuous Dissipation ¹	P_t	750 mW
Channel Temperature	T_{ch}	175°C
Storage Temperature	T_{stg}	-65°C to +150°C

Notes

Celeritek reserves the right to make changes without further notice to any products herein. Celeritek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Celeritek assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Celeritek does not convey any license under its patent rights nor the rights of others. Celeritek products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Celeritek product could create a situation where personal injury or death may occur. Should Buyer purchase or use Celeritek products for any such unintended or unauthorized application, Buyer shall indemnify and hold Celeritek and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Celeritek was negligent regarding the design or manufacture of the part. Celeritek is a registered trademark of Celeritek, Inc. Celeritek, Inc. is an Equal Opportunity/Affirmative Action Employer.