


CGA103450 Lightweight prismatic model

External Dimensions (mm)^{*2}

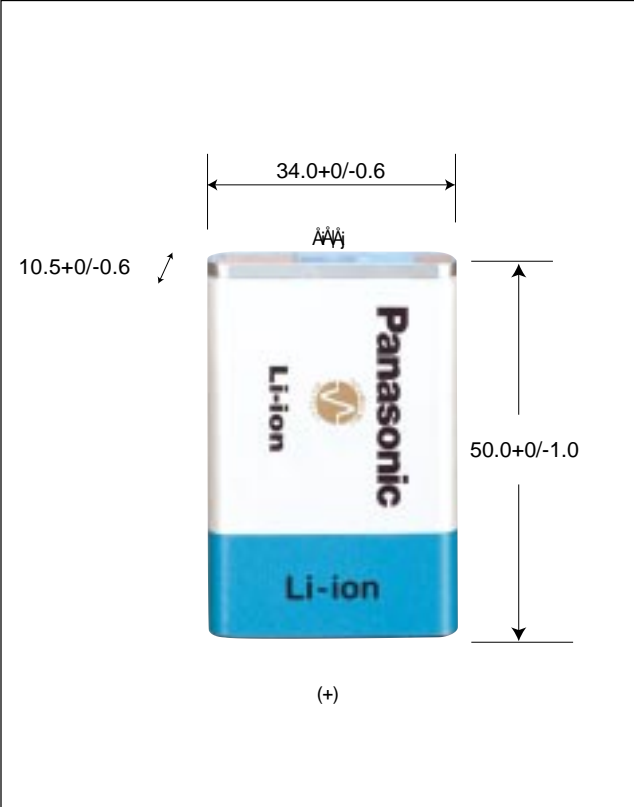



Specifications

| | | |
|---------------------------------|-----------|---------------|
| Nominal Voltage | | 3.6V |
| Standard Capacity ^{*1} | | 1800mAh |
| Dimensions ^{*2} | Thickness | 10.5+0/-0.6mm |
| | Width | 34.0+0/-0.6mm |
| | Height | 50.0+0/-1.0mm |
| | Weight | Approx.39g |


^{*1} After a fresh battery has been charged at constant voltage/constant current(4.2V, Max.1200mA, 2hrs, 20°C), the average of the capacity (ending voltage of 3V at 20°C) that is discharged at a standard current (340mA).

^{*2} Dimensions of a fresh battery

Discharge Characteristics

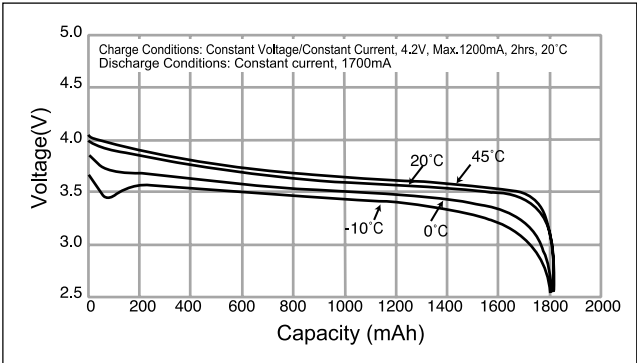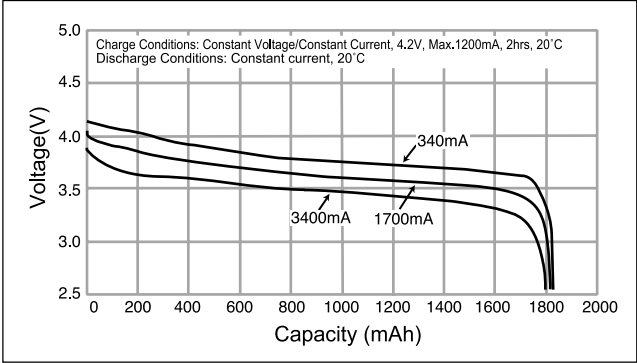

Charge Characteristics

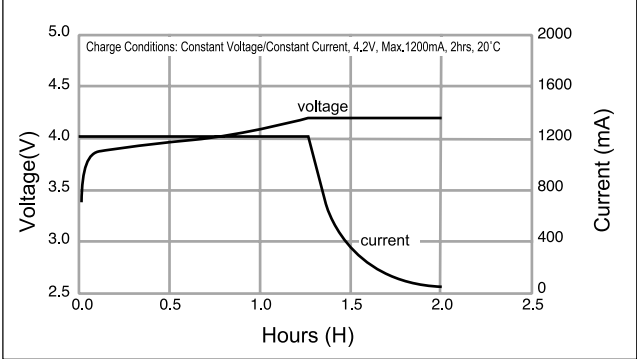

Cycle Life Characteristics

