


[查询CMPT2222供应商](#)

[捷多邦 专业PCB打样工厂, 24小时加急出货](#)

Central
Semiconductor Corp.

CMPT2222A

NPN SILICON TRANSISTOR



SOT-23 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPT2222A type is an NPN silicon transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for small signal general purpose and switching applications.

Marking Code is C1P.

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

	SYMBOL		UNITS
Collector-Base Voltage	V_{CB0}	75	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current	I_C	600	mA
Power Dissipation	P_D	350	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance	θ_{JA}	357	$^{\circ}\text{C/W}$


ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CBO}	$V_{CB}=60\text{V}$		10	nA
I_{CBO}	$V_{CB}=60\text{V}, T_A=125^{\circ}\text{C}$		10	μA
I_{CEV}	$V_{CE}=60\text{V}, V_{EB}=3.0\text{V}$		10	nA
I_{EBO}	$V_{EB}=3.0\text{V}$		10	nA
BV_{CBO}	$I_C=10\mu\text{A}$	75		V
BV_{CEO}	$I_C=10\text{mA}$	40		V
BV_{EBO}	$I_E=10\mu\text{A}$	6.0		V
$V_{CE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$		0.3	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$		1.0	V
$V_{BE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	0.6	1.2	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$		2.0	V
η_{FE}	$V_{CE}=10\text{V}, I_C=0.1\text{mA}$	35		
η_{FE}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}$	50		
η_{FE}	$V_{CE}=10\text{V}, I_C=10\text{mA}$	75		
η_{FE}	$V_{CE}=1.0\text{V}, I_C=150\text{mA}$	50		



SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
h_{FE}	$V_{CE}=10V, I_C=150mA$	100	300	
h_{FE}	$V_{CE}=10V, I_C=500mA$	40		
f_T	$V_{CE}=20V, I_C=20mA, f=100MHz$	300		MHz
C_{ob}	$V_{CB}=10V, I_E=0, f=1.0MHz$		8.0	pF
C_{ib}	$V_{EB}=0.5V, I_C=0, f=1.0MHz$		25	pF
h_{ie}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	2.0	8.0	$k\Omega$
h_{ie}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	0.25	1.25	$k\Omega$
h_{re}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$		8.0	$\times 10^{-4}$
h_{re}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$		4.0	$\times 10^{-4}$
h_{fe}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	50	300	
h_{fe}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	75	375	
h_{oe}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	5.0	35	$\mu mhos$
h_{oe}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	25	200	$\mu mhos$
$rb'C_C$	$V_{CB}=10V, I_E=20mA, f=31.8MHz$		150	ps
NF	$V_{CE}=10V, I_C=100\mu A, R_S=1.0k\Omega, f=1.0kHz$		4.0	dB
t_d	$V_{CC}=30V, V_{BE}=0.5, I_C=150mA, I_{B1}=15mA$		10	ns
t_r	$V_{CC}=30V, V_{BE}=0.5, I_C=150mA, I_{B1}=15mA$		25	ns
t_s	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$		225	ns
t_f	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$		60	ns

All dimensions in inches (mm).

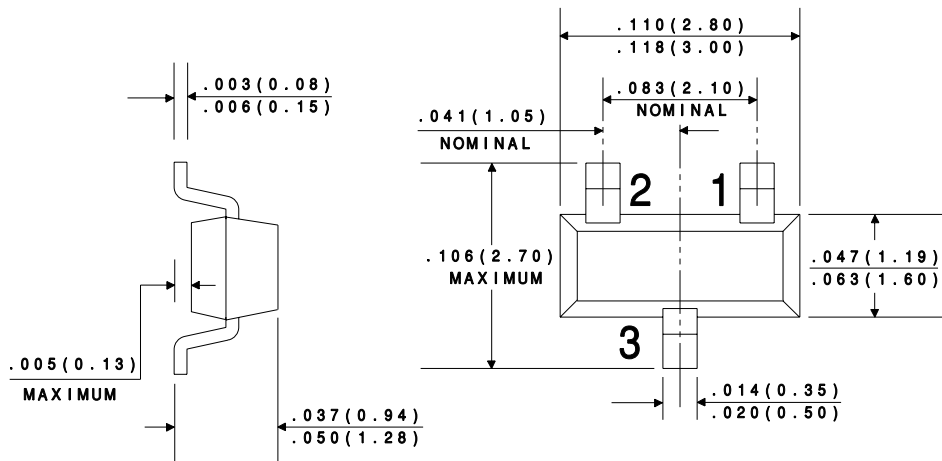

LEAD CODE:
 1) BASE
 2) EMITTER
 3) COLLECTOR