


CPT20035 – CPT20050

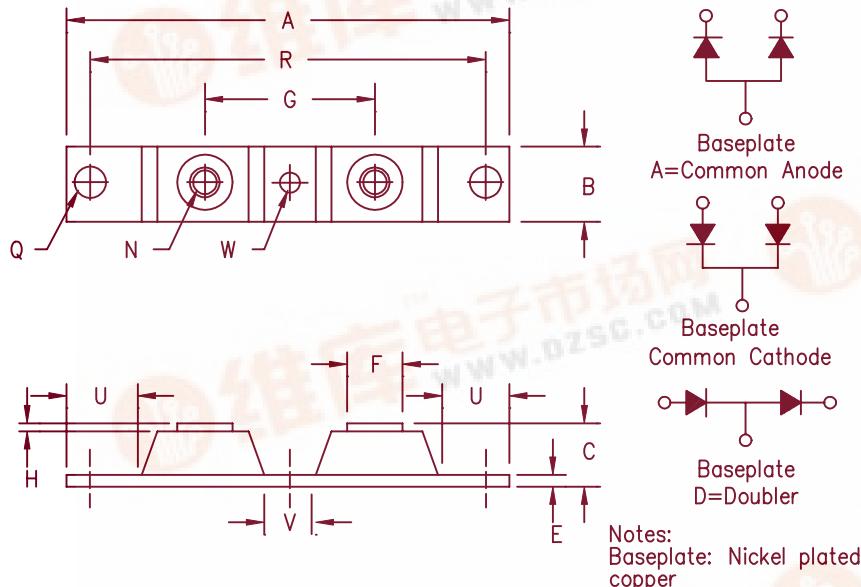

Dim.		Inches	Millimeters	
Min.	Max.		Min.	Max.
A	---	3.630	---	92.20
B	0.700	0.800	17.78	20.32
C	---	0.630	---	16.00
E	0.120	0.130	3.05	3.30
F	0.490	0.510	12.45	12.95
G	1.375	BSC	34.92	BSC
H	0.010	---	0.25	---
N	---	---	---	---
Q	0.275	0.290	6.99	7.37
R	3.150	BSC	80.01	BSC
U	0.600	---	15.24	---
V	0.312	0.340	7.92	8.64
W	0.180	0.195	4.57	4.95
				Dia.

Microsemi Catalog Number

Working Peak Reverse Voltage

Repetitive Peak Reverse Voltage

CPT20035*

35V

35V

CPT20040*

40V

40V

CPT20045*

45V

45V

CPT20050*

50V

50V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- 200 Amperes/35 to 50 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current per pkg
Average forward current per leg
Maximum surge current per leg
Maximum repetitive reverse current per leg
Max peak forward voltage per leg
Max peak forward voltage per leg
Max peak reverse current per leg
Max peak reverse current per leg
Typical junction capacitance per leg

| F(AV) 200 Amps
| F(AV) 100 Amps
| FSM 2000 Amps
| R(OV) 2 Amps
V FM 0.80 Volts
V FM 0.60 Volts
| RM 75mA
| RM 4.0mA
CJ 4600pF

T_C = 143°C Square wave, R_{θJC} = 0.25°C/W
T_C = 143°C, Square wave, R_{θJC} = 0.5°C/W
8.3ms, half sine, T_J = 175°C
f = 1 KHz, 25°C, 1 usec square wave
| FM = 200A: T_J = 25°C*
| FM = 200A: T_J = 175°C*
V_{RRM}, T_J = 125°C*
V_{RRM}, T_J = 25°C
V_R = 5.0V, T_J = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operation junction temp range
Max thermal resistance per leg
Max thermal resistance per pkg
Typical thermal resistance (greased)
Terminal Torque
Mounting Base Torque (outside holes)
Mounting Base Torque (center hole)
center bolt must be torqued first
Weight

T_{STG}
T_J
R_{θJC}
R_{θJC}
R_{θCS}

-55°C to 175°C
-55°C to 175°C
0.5°C/W Junction to case
0.25°C/W Junction to case
0.08°C/W Case to sink
35–50 inch pounds
30–40 inch pounds
8–10 inch pounds
2.8 ounces (75 grams) typical

CPT20035 – CPT20050

Figure 1
Typical Forward Characteristics – Per Leg

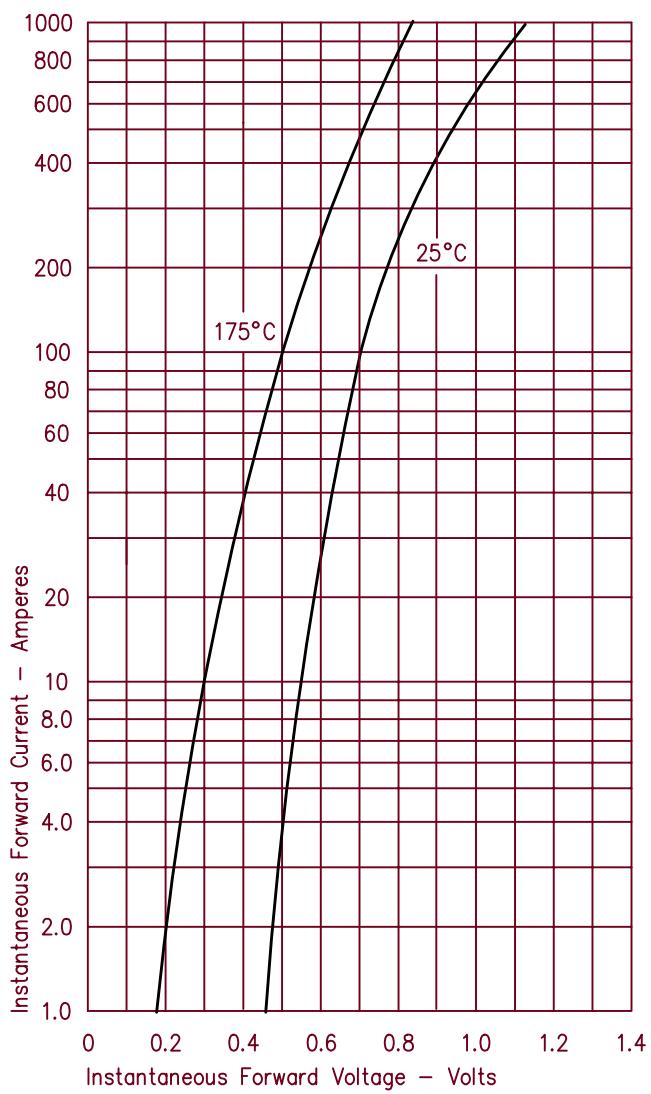


Figure 2
Typical Reverse Characteristics – Per Leg

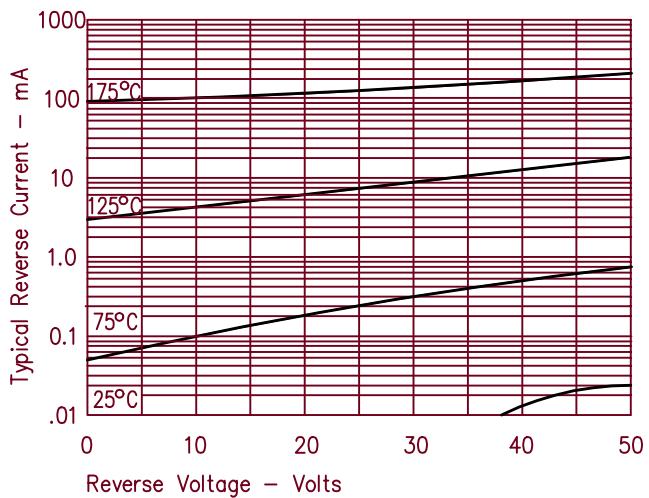


Figure 3
Typical Junction Capacitance – Per Leg

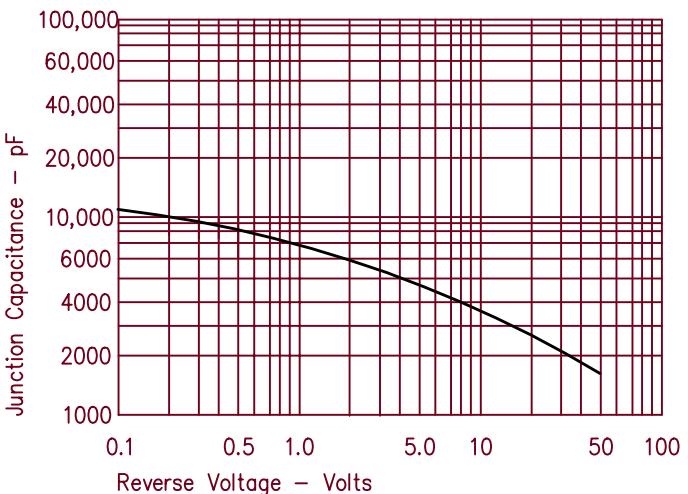


Figure 4
Forward Current Derating – Per Leg

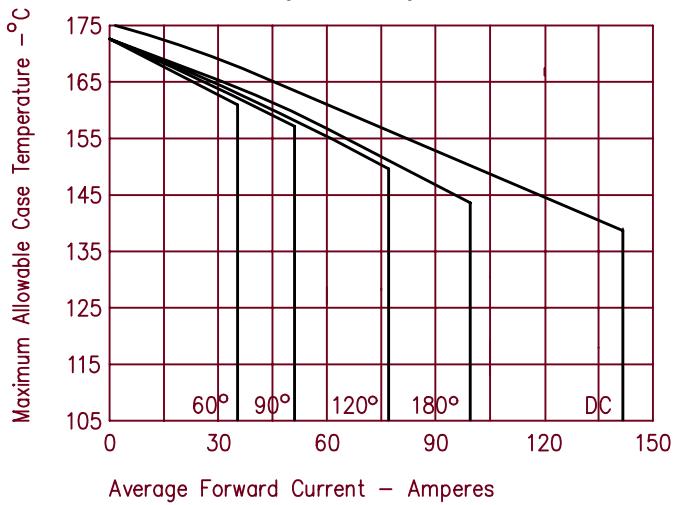


Figure 5
Maximum Forward Power Dissipation – Per Leg

