

SPECIFICATIONS

Electrical Ratings	50mA @ 48VDC
Electrical Life	100,000 cycles typical
Contact Resistance	< 50 mΩ initial
Actuation Force	160 +/- 50gF 260 +/- 50gF
Actuator Travel	.25 +/- .1mm
Dielectric Strength	1000Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C


MATERIALS ←RoHS COMPLIANT

Actuator	Brass
Housing	4/6 Nylon
Cover	Stainless Steel
Contacts	Stainless Steel, Silver Plated
Terminals	Phosphor Bronze, Silver Plated


ORDERING INFORMATION

1. Series:	CS1204	F160
	CS1204	
	CS1204A	
2. Actuation Force:		
	F160 = 160gF	
	F260 = 260gF	

DIMENSIONS

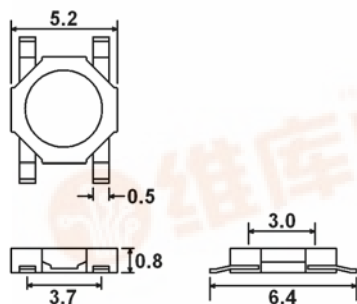

CS1204

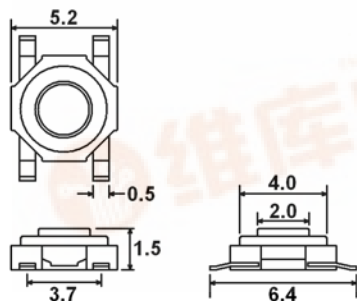

CS1204A

SCHEMATIC & PC LAYOUT

