

Phase Control Thyristors


$$V_{RRM} = 1200-1600 \text{ V}$$

$$I_{T(RMS)} = 160 \text{ A}$$

$$I_{T(AV)M} = 100 \text{ A}$$

V_{RSM}	V_{RRM}	Type
V_{DSM}	V_{DRM}	
V	V	
1300	1200	CS 72-12io8
1700	1600	CS 72-16io8

Not for new application

TO-209AC
(TO-94)1 = Anode, 2 = Cathode,
3 = Gate, 4 = Auxiliary Cathode

Symbol	Test Conditions	Maximum Ratings
$I_{T(RMS)}$	$T_{VJ} = T_{VJM}$	160 A
$I_{T(AV)M}$	$T_{case} = 85^{\circ}\text{C}; 180^{\circ} \text{ sine}$	75 A
	$T_{case} = 65^{\circ}\text{C}; 180^{\circ} \text{ sine}$	100 A
I_{TSM}	$T_{VJ} = 45^{\circ}\text{C};$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 2000 A $t = 8.3 \text{ ms (60 Hz), sine}$ 2130 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 1750 A $t = 8.3 \text{ ms (60 Hz), sine}$ 1850 A
I^2t	$T_{VJ} = 45^{\circ}\text{C}$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 20 000 A ² s $t = 8.3 \text{ ms (60 Hz), sine}$ 19 000 A ² s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 15 000 A ² s $t = 8.3 \text{ ms (60 Hz), sine}$ 14 200 A ² s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $f = 50 \text{ Hz}, t_p = 200 \mu\text{s}$ $V_D = 1/2 V_{DRM}$ $I_G = 0.5 \text{ A}$ $di_G/dt = 0.5 \text{ A}/\mu\text{s}$	repetitive, $I_T = 225 \text{ A}$ 100 A/ μs non repetitive, $I_T = I_{T(AV)M}$ 500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM};$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$V_{DR} = 2/3 V_{DRM}$ 1000 V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$ $I_T = I_{T(AV)M}$	$t_p = 30 \mu\text{s}$ 30 W $t_p = 500 \mu\text{s}$ 15 W
$P_{G(AV)}$		1 W
V_{RGM}		10 V
T_{VJ}		-40...+125 $^{\circ}\text{C}$
T_{VJM}		125 $^{\circ}\text{C}$
T_{stg}		-40...+125 $^{\circ}\text{C}$
M_d	Mounting torque	16-20 Nm 142-177 lb.in.
Weight		110 g

Features

- Thyristor for line frequencies
- International standard package JEDEC TO-209AC
- Planar glassivated chip
- Long-term stability of blocking currents and voltages
- Gate and auxiliary cathode pin connection


Applications

- Motor control
- Power converter
- AC power controller

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling

Dimensions in mm (1 mm = 0.0394")

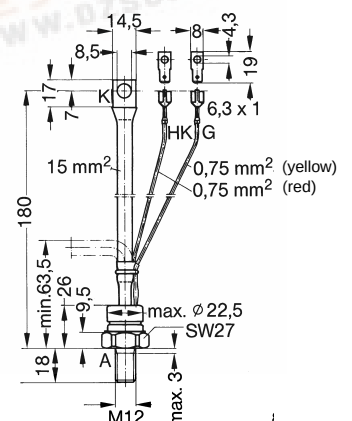

Symbol	Test Conditions	Characteristic Values		
I_R, I_D	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	$\leq$	15	mA
V_T	$I_T = 300 \text{ A}; T_{VJ} = 125^\circ\text{C}$	$\leq$	1.78	V
V_{T0}	For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$)		1.0	V
r_T			2.6	m Ω
V_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	$\leq$	3.0	V
	$T_{VJ} = -40^\circ\text{C}$	$\leq$	3.5	V
I_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$	$\leq$	150	mA
	$T_{VJ} = -40^\circ\text{C}$	$\leq$	200	mA
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	$\leq$	0.3	V
I_{GD}		$\leq$	3	mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10 \mu\text{s}$ $I_G = 0.5 \text{ A}; di_G/dt = 0.5 \text{ A}/\mu\text{s}$	$\leq$	300	mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6 \text{ V}; R_{GK} = \infty$	$\leq$	200	mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.5 \text{ A}; di_G/dt = 0.5 \text{ A}/\mu\text{s}$	$\leq$	2	μs
t_q	$T_{VJ} = T_{VJM}; I_T = 75 \text{ A}, t_p = 300 \mu\text{s}; di/dt = -20 \text{ A}/\mu\text{s}$ $V_R = 100 \text{ V}; dv/dt = 10 \text{ V}/\mu\text{s}; V_D = 2/3 V_{DRM}$	typ.	150	μs
R_{thJC}	DC current		0.36	K/W
R_{thJH}	DC current		0.46	K/W
d_s	Creepage distance on surface		10.5	mm
d_A	Strike distance through air		10.5	mm
a	Max. acceleration, 50 Hz		50	m/s ²

Accessories:

Nut M12 DIN 439/SW27

Lock washer A12 DIN 128