

[查询CSHD6-40C供应商](#)

[捷多邦，专业PCB打样工厂，24小时加急出货](#)


Central Semiconductor Corp.



CSHD6-40C

**SCHOTTKY RECTIFIER
DUAL,COMMON CATHODE
6.0 AMPS, 40 VOLTS**

DPAK POWER!



DPAK CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CSHD6-40C, Silicon Schottky Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer and automotive applications.

MAXIMUM RATINGS: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)



	SYMBOL		UNITS
Peak Working Reverse Voltage	V_{RWM}	40	V
DC Blocking Voltage	V_{R}	40	V
Average Rectified Forward Current ($T_C=125^{\circ}\text{C}$) Per Diode	I_{O}	3.0	A
Average Rectified Forward Current ($T_C=125^{\circ}\text{C}$) Per Device	I_{O}	6.0	A
Peak Repetitive Forward Current ($T_C=125^{\circ}\text{C}$)	I_{FRM}	6.0	A
Peak Forward Surge Current	I_{FSM}	75	A
Peak Repetitive Reverse Surge Current ($t_p=2 \mu\text{s}$)	I_{RRM}	1.0	A
Operating and Storage			
Junction Temperature	$T_{\text{J}}, T_{\text{stg}}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance, Per Diode	Θ_{JC}	6.0	$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{R}	$V_{\text{R}}=40\text{V}$		100	μA
I_{R}	$V_{\text{R}}=40\text{V}, T_C=125^{\circ}\text{C}$		15	mA
V_{F}	$I_{\text{F}}=3.0\text{A}$		0.60	V
V_{F}	$I_{\text{F}}=3.0\text{A}, T_C=125^{\circ}\text{C}$		0.45	V
V_{F}	$I_{\text{F}}=6.0\text{A}$		0.70	V
V_{F}	$I_{\text{F}}=6.0\text{A}, T_C=125^{\circ}\text{C}$		0.625	V



All dimensions in inches (mm).

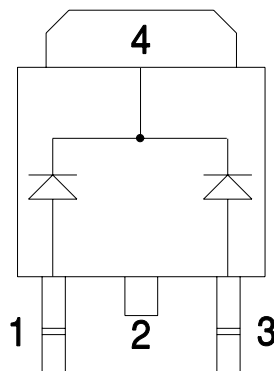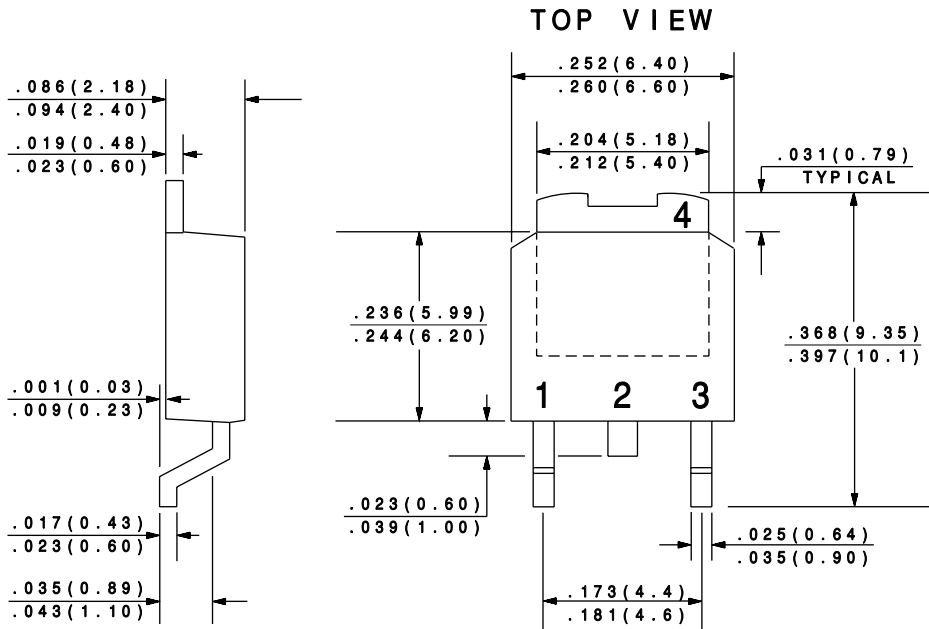

LEAD CODE:

- 1) ANODE #1
- 2) CATHODE
- 3) ANODE #2
- 4) CATHODE

PIN 2 IS COMMON TO THE TAB (4).