

[查询CT15SM-24供应商](#)

[捷多邦, 专业PCB打样工厂, 24小时加急出货](#)


MITSUBISHI INSULATED GATE BIPOLAR TRANSISTOR

CT15SM-24

GENERAL INVERTER • UPS USE

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.


CT15SM-24

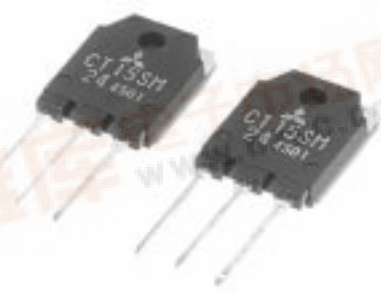

- VCES 1200V
- IC 15A
- High Speed Switching
- Low VCE Saturation Voltage

OUTLINE DRAWING

Dimensions in mm

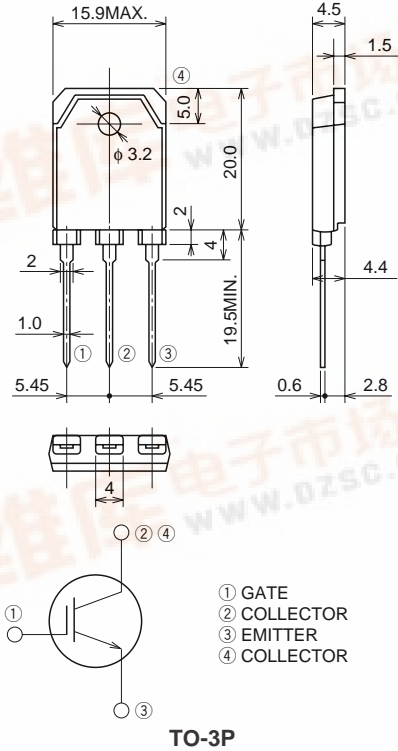

APPLICATION

AC & DC motor controls, General purpose inverters, UPS, Power supply switching, Servo controls, etc.

MAXIMUM RATINGS (Tc = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CE} S	Collector-emitter voltage	V _{GE} = 0V	1200	V
V _{GE} S	Gate-emitter voltage	V _{CE} = 0V	±20	V
V _{GEM}	Peak gate-emitter voltage	V _{CE} = 0V	±30	V
I _C	Collector current		15	A
I _{CM}	Collector current (Pulsed)		30	A
P _C	Maximum power dissipation		250	W
T _j	Junction temperature		-40 ~ +150	°C
T _{stg}	Storage temperature		-40 ~ +150	°C
—	Weight	Typical value	4.8	g

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

MITSUBISHI INSULATED GATE BIPOLAR TRANSISTOR



CT15SM-24

GENERAL INVERTER • UPS USE

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V (BR) CES	Collector-emitter breakdown voltage	$I_C = 1\text{mA}, V_{GE} = 0\text{V}$	1200	—	—	V
IGES	Collector-emitter leakage current	$V_{GE} = \pm 30\text{V}, V_{CE} = 0\text{V}$	—	—	± 0.5	μA
ICES	Gate-emitter leakage current	$V_{CE} = 1200\text{V}, V_{GE} = 0\text{V}$	—	—	1	mA
V _{GE(th)}	Gate-emitter threshold voltage	$I_C = 1.5\text{mA}, V_{CE} = 10\text{V}$	4.5	6.0	7.5	V
V _{CE(sat)}	Collector-emitter saturation voltage	$I_C = 15\text{A}, V_{GE} = 15\text{V}$	—	2.7	3.6	V
C _{ies}	Input capacitance	$V_{CE} = 25\text{V}, V_{GE} = 0\text{V}, f = 1\text{MHz}$	—	1600	—	pF
C _{oes}	Output capacitance		—	150	—	pF
C _{res}	Reverse transfer capacitance		—	45	—	pF
t _{d (on)}	Turn-on delay time	$V_{CC} = 600\text{V}, \text{Resistance load},$ $I_C = 15\text{A}, V_{GE} = 15\text{V}, R_{GE} = 20\Omega$	—	50	—	ns
t _r	Rise time		—	150	—	ns
t _{d (off)}	Turn-off delay time		—	150	—	ns
t _f	Fall time		—	250	—	ns
R _{th (j-c)}	Thermal resistance		Junction to case	—	—	0.50

PERFORMANCE CURVES

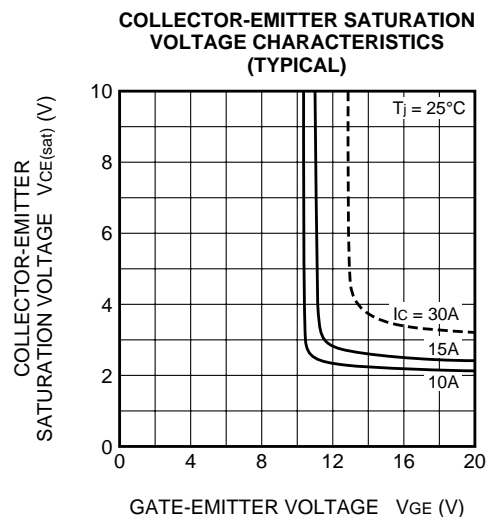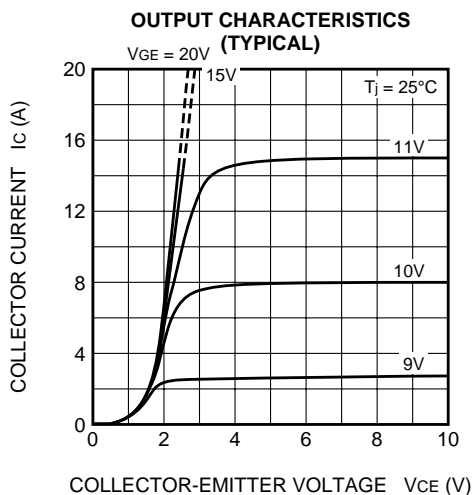


PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

MITSUBISHI INSULATED GATE BIPOLAR TRANSISTOR


CT15SM-24

GENERAL INVERTER • UPS USE


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

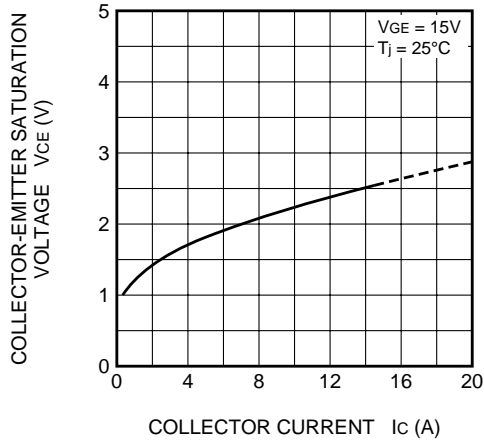


COLLECTOR CURRENT VS. GATE-EMITTER VOLTAGE CHARACTERISTIC (TYPICAL)

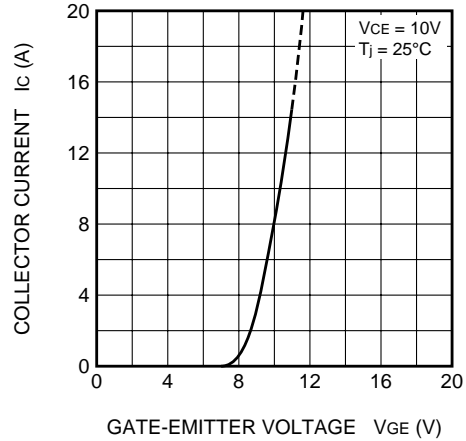


CAPACITANCE VS. COLLECTOR-EMITTER VOLTAGE CHARACTERISTIC (TYPICAL)

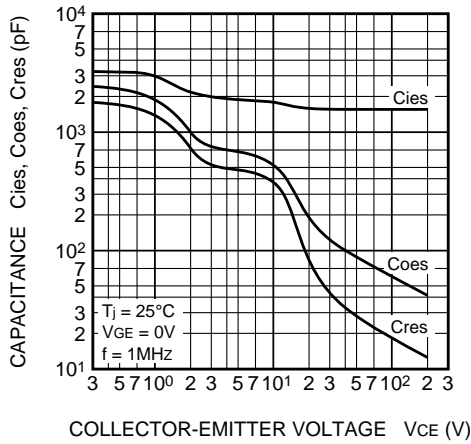

SWITCHING TIME-COLLECTOR CURRENT CHARACTERISTIC (TYPICAL)

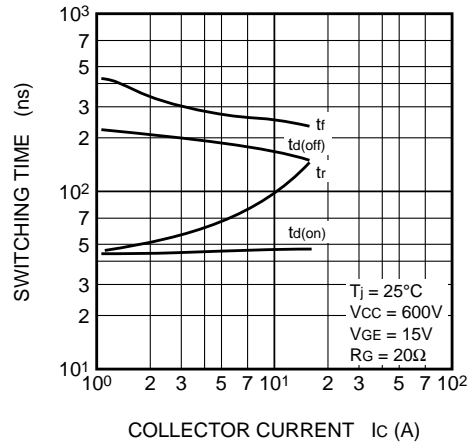

GATE-EMITTER VOLTAGE VS. GATE CHARGE CHARACTERISTIC (TYPICAL)

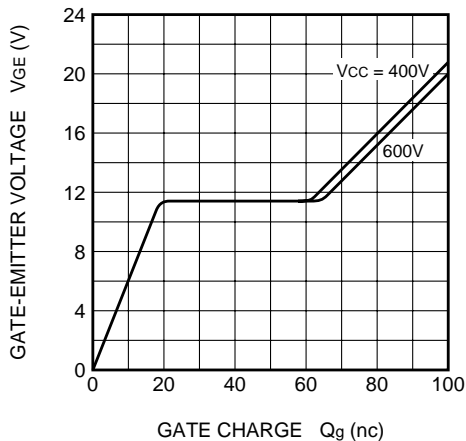

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (TYPICAL)

