

查询CXA1008供应商

捷多邦，专业PCB打样工厂，24小时

SONY.

CXA1008P/1009P


High-speed Sample and Hold Amplifiers

Description

CXA1008P/1009P are bipolar IC's developed for the purpose of sample holding video signals and other signals at high-speed.

Features

- Maximum sampling frequency
CXA1008P 35 MHz
CXA1009P 18 MHz
- Linearity 0.08% (Typ.)
- Clock input level ECL compatible
- Low power consumption
CXA1008P 680 mW (Typ.)
CXA1009P 420 mW (Typ.)

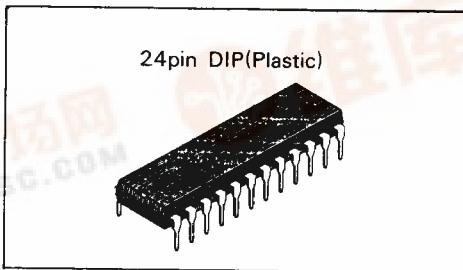

Function

High-speed hold circuit, wide band 6 dB amplifier, A/D reference power supply, A/D clock output circuit.

Structure

Bipolar silicon monolithic IC.

Applications

- A/D converter and other analog signal processing
- Other general applications.

Block Diagram

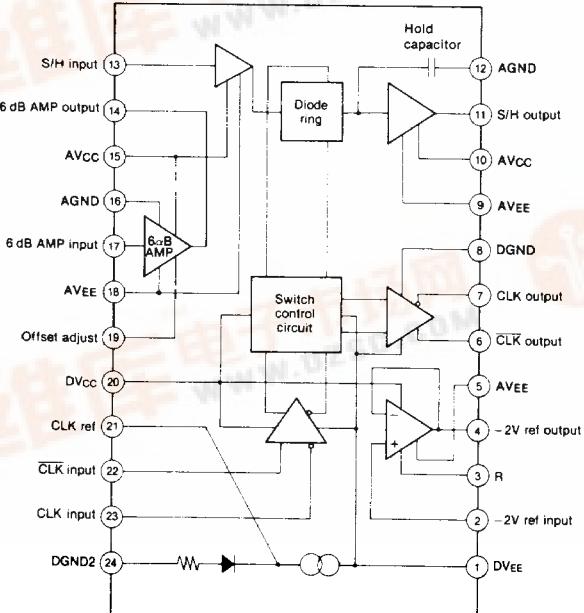


Fig. 1






Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

• Supply voltage	V _{CC}	+ 5.5	V
	V _{EE}	- 6.0	V
• Operating temperature	T _{opr}	- 20 to + 75	°C
• Storage temperature	T _{stg}	- 55 to + 150	°C
• Allowable power dissipation	P _D	1.2	W

Recommended Operating Conditions

• Supply voltage	V _{CC}	+ 4.75 to 5.25V	
	V _{EE}	- 4.75 to - 5.45V	

Pin Description

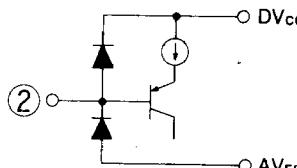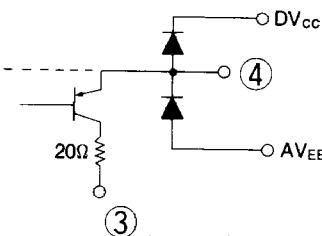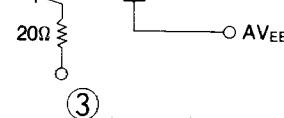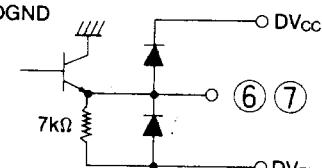No.	Symbol	Equivalent circuit	Description
1	DV _{EE}		Digital V _{EE} (-5V)
2	-2V ref input		reference voltage input for A/D converter
3	R		Pulldown terminal for external R (30Ω typically)
4	-2V ref output		reference voltage output for A/D converter
5	AV _{EE}		Analog V _{EE} (-5V)
6	CLK output		CLK output for A/D converter
7	CLK output		CLK output for A/D converter
8	DGND		Digital GND
9	AV _{EE}		Analog V _{EE} (-5V)
10	AV _{CC}		Analog V _{CC} (+5V)

No.	Symbol	Equivalent circuit	Description
11	S/H output		S/H output
12	AGND		Analog GND
13	S/H input		S/H input
14	6dB AMP output		Output terminal of 6dB amplifier
15	AVcc		Analog Vcc (+5V)
16	AGND		Analog GND

No.	Symbol	Equivalent circuit	Description
17	6dB AMP input	(17)	6dB AMP input
18	AV _{EE}	(18)	Analog V _{EE} (-5V)
19	offset adjust	(19)	6dB AMP DC offset adjust terminal
20	DV _{CC}		Digital V _{CC} (+5V)
21	CLK ref	(21)	CLK reference output
22	CLK input	(22)	CLK input (Note: connect to (21) PIN or input ECL CLK signal)
23	CLK input	(23)	CLK input (Note: input ECL CLK signal)
24	DGND		Digital GND

CXA1008P

Electrical Characteristics ($T_a = 25^\circ\text{C}$, $V_{CC} = +5\text{V}$, $V_{EE} = -5\text{V}$)

S/H section (see Fig. 3)

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Digital input voltage		V_{IH}	-0.9	-0.8		V
		V_{IL}		-1.6	-1.5	V
CLK Reference voltage (pin 21)		V_{CLKREF}	-1.3	-1.2	-1.1	V
Analog input voltage range	$\Delta V < 1.2\text{V}$ *1	V_{INS}	-3		3	V
Output voltage range		V_{outs}	-3		3	V
Power Supply		I_{CC}	48	60	78	mA
	without -2V ref.	I_{EE1}	48	60	78	mA
	with -2V ref. $R_{LI} = 50\Omega$ *2	I_{EE2}	80	100	125	mA
Input bias current	$-2\text{V} < V_{in} < 2\text{V}$	I_{Biass}		15	30	μA
Output impedance		Z_{os}		20	40	Ω
Voltage gain ratio		G_{vs}	0.99	1.0	1.01	
Full power bandwidth	$V_{in} = 2\text{V}_{p-p}$ (-3dB)	BW		12		MHz
Power supply rejection ratio		SVR _s		-40		dB
Hold mode feed through	$f_{in} = 4\text{MHz}$ $V_{in} = 1\text{V}_{p-p}$, CLK open	HMT _H		-50	-40	dB
Clock leak	$V_{in} = 0\text{V}$	CL _{LEAK}		10	50	mV
Linearity	$f_{in} = 19.53\text{kHz}$ (10/512MHz) $f_{CLK} = 10\text{MHz}$ *3	Lin		0.08	0.15	%
Hold mode droop	input voltage range, 0 to -2V	HMDR		2	20	$\text{mV}/\mu\text{s}$
Acquisition time	$\Delta V = 1.2\text{V}$	T _{aq}		8	12	ns
Settling time	Settle to $\pm 0.2\%$ of F.S. see the Timing Chart	T _{set}		25		ns
DC offset voltage	$f_{CLK} = 5\text{MHz}$	V_{offset}		± 15	± 100	mV
Maximum sampling frequency		f_{CLKH}	35			MHz
Minimum sampling frequency		f_{CLKL}			5	MHz
Differential gain (D.G.)	$V_{in} = \text{NTSC}$ 40 IRE mode ramp. $f_{CLK} = 20\text{MHz}$	DG		0.5	1.0	%
Differential phase (D.P.)		DP		0.5	1.0	deg

 $(R_{LI} = 50\Omega, \text{ see Fig. 3})$

CXA1009P

Electrical Characteristics ($T_a = 25^\circ C$, $V_{CC} = +5V$, $V_{EE} = -5V$)
S/H section (see Fig. 3)

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Digital input voltage	$\Delta V < 1.2V$ *1	V_{IH}	-0.9	-0.8		V
		V_{IL}		-1.6	-1.5	V
CLK Reference voltage (pin 21)		V_{CLKREF}	-1.3	-1.2	-1.1	V
Analog input voltage range		V_{INS}	-3		3	V
Output voltage range		V_{OUTS}	-3		3	V
		I_{CC}	25	35	45	mA
Power supply	without -2V ref.	I_{EE1}	25	35	45	mA
	with -2V ref. $R_{LI} = 50\Omega$ *2	I_{EE2}	60	75	98	mA
Input bias current	$-2V < V_{in} < 2V$	I_{BIAS}		9	18	μA
Output impedance		Z_{OS}		20	40	Ω
Voltage gain ratio		G_{VS}	0.99	1.0	1.01	
Full power bandwidth	$V_{in} = 2V_{p-p} (-3dB)$	BW	6			MHz
Power supply rejection ratio		SVR_s	-40			dB
Hold mode feed through	$f_{IN} = 4MHz$ $V_{in} = 1V_{p-p}$, CLK open	HMT_H	-50	-40		dB
Clock leak	$V_{in} = 0V$	CL_{LEAK}	10	50		mV
Linearity	$f_{IN} = 19.53kHz$ (10/512MHz) $f_{CLK} = 10MHz$ *3	Lin	0.08	0.15		%
Hold mode droop	input voltage range, 0 to -2V	$HMDR$	2	10		$mV/\mu s$
Acquisition time	$\Delta V = 1.2V$	T_{AQ}	12	20		ns
Settling time	Settle to $\pm 0.2\%$ of F.S. see the Timing Chart	T_{SET}	36			ns
DC offset voltage	$f_{CLK} = 5MHz$	V_{OFFSET}	± 15	± 100		mV
Maximum sampling frequency		f_{CLKH}	18			MHz
Minimum sampling frequency		f_{CLKL}		2		MHz
Differential gain (D.G.)	$V_{in} = NTSC$ 40 IRE more ramp	DG	0.5	1.0		%
Differential phase (D.P.)	$f_{CLK} = 15MHz$	DP	0.5	1.0		deg

*1 ΔV is voltage change during one sampling period.

*2 Power consumption is $I_{CC} \times 5V + I_{EE1} \times 5V + 40mA \times 1.8V$.

*3 Input voltage waveform

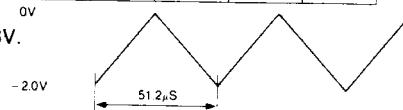


Fig. 2

6dB amp section (see Fig. 3)

Item	Condition	Symbol	CXA1008P			CXA1009P			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Input voltage range	*3	V _{INA}	-1.3		+0.8	-1.3		+0.8	V
Band width (-3dB)	V _{in} = 1V _{pp}	W	45	55		15	25		MHz
Input bias current	-1V < V _{in} < 1V	I _{Bias A}		9	20		5	10	μA
Output impedance		Z _{OA}		4	10		4	10	Ω
Voltage gain	*4	G _{VA}	5.1	6.0	6.9	5.1	6.0	6.9	dB
Power supply rejection ratio		SV _R _A		-40			-40		dB

*3 2ndary harmonic: -40dB f_{in} = 3.58MHz*4 f_{in} = 3.58MHz V_{in} = 1V_{pp}**CLK OUT section (see Fig. 3)**

Item	Condition	Symbol	CXA1008P			CXA1009P			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Output voltage	Amplitude	V _{CLK}	0.2	0.3	0.4	0.2	0.3	0.4	V
	Low level	V _{CLKL}	-1.2	-1.1	-0.9	-1.2	-1.1	-0.9	V
Rise time	RL2 = 1.5 KΩ see Fig. 3	tr		7	10		7	10	ns
		tf		5	8		5	8	ns
CLK Delay 1		τ _{D1}	20	28	34	36	38	45	ns
		τ _{D2}	14	22	28	24	26	33	ns

-2V_{ref} amp section (see Fig. 3)

Item	Condition	Symbol	CXA1008P			CXA1009P			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Voltage gain ratio	V _{ref} = -2V R _{LI} = 50Ω	G _{VR}	0.9	1.0	1.1	0.9	1.0	1.1	
Input bias current	-3V < V _{in} < 0V	I _{Bias R}		5	10		5	10	μA
Output impedance		Z _{OR}		2	10		2	10	Ω

Electrical Characteristics Test Circuit

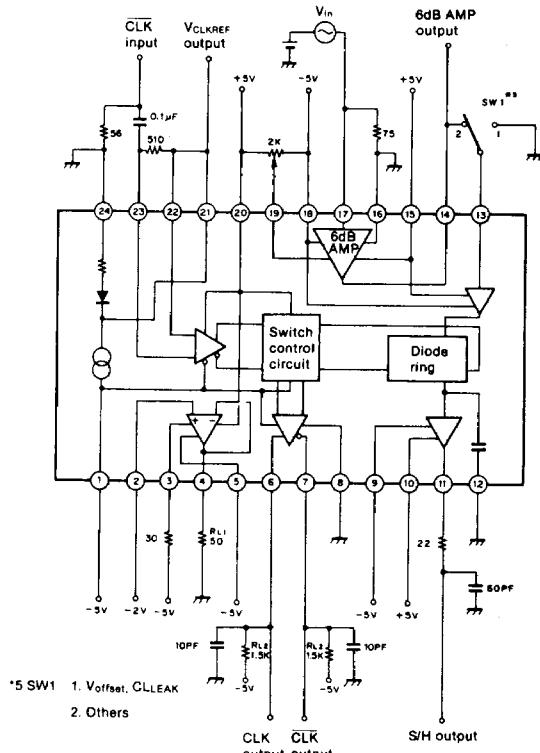


Fig. 3

Timing Chart

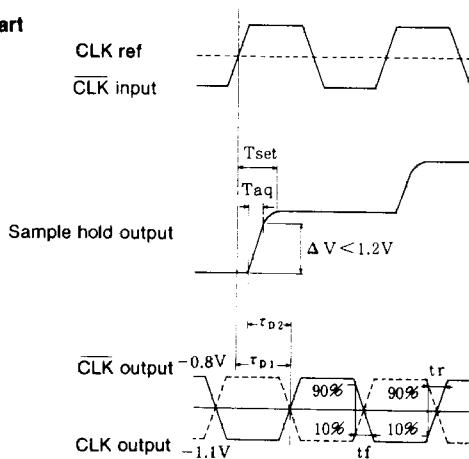


Fig. 4

Description of Functions


CXA1008P/1009P are the monolithic ICs incorporating a high-speed sample hold circuit, a wide band 6 dB amp, reference power supply for A/D converter, and a clock output section, and operate up to a sampling frequency of 35/15 MHz.

CXA1008P/1009P can compose in 20/15 MS/s A/D converter system in combination with a CX20052A. CXA1008P/1009P form, with the input of a single phase or 2-phase ECL clock input, a new sampling signal. For this reason, the sampling period remain unchanged even when the frequency or duty of the input sampling CLK signal changes.

- Wide band 6 dB AMP.

In-phase amp with a band width over 45/15 MHz amplifies ordinary TV signal (1Vp-p) to a 2Vp-p signal which gives the highest accuracy when processed in CX20052A.

Application Circuit

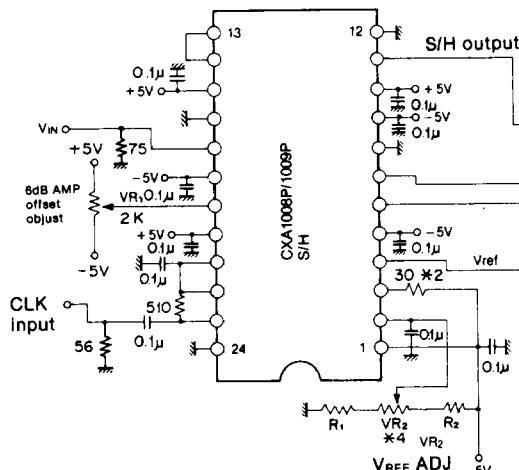

- CLK output section

When used in combination with an A/D converter such as CX20052A, the CLK timing between the S/H circuit and the A/D converter needs to be adjusted, and up to 20/15 MHz, CXA1008P/1009P generate CLK timing signals for driving the A/D converter, and output 2-phase CLK at 300 mVp-p from pins 6 and 7. With this output, no separate CLK is required to combine with an A/D converter.

- CXA1008P/1009P incorporate a buffer amp to provide a reference voltage for the A/D converter.

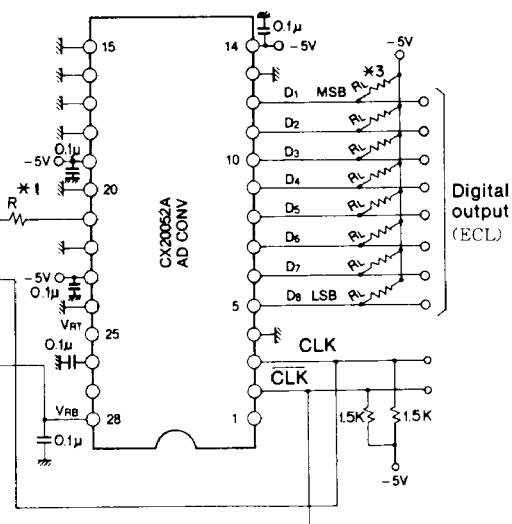


Fig. 5 Connection of CXA 1008P/1008P with CX20052A (1)

*1 R is a ringing preventing resistor. Select between 10 to 50Ω





*2 Pulldown R for V_{ref}


*3 R_L = 4.3kΩ

*4 R₁ = 1kΩ, VR₂ = 2kΩ, R₂ = 2kΩ

Notes on Application

1. Unless sufficiently stable power supply and GND voltage in the high-frequency range are used, the device characteristics deteriorates. For this reason, bring the power supply bypass capacitor as near to this IC as possible, and make the pattern to the power supply and to the earth terminal as wide as feasible.
2. To reduce CLK leak, use waveforms similar to sine waves as far as possible, up to the CLK input. For satisfactory operation, a CLK input amplitude of around 300mV is enough.
3. When the S/H input deviates over 1.2V during one sampling period, the output may contain errors.

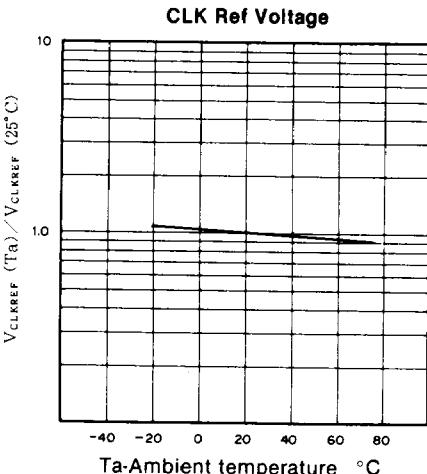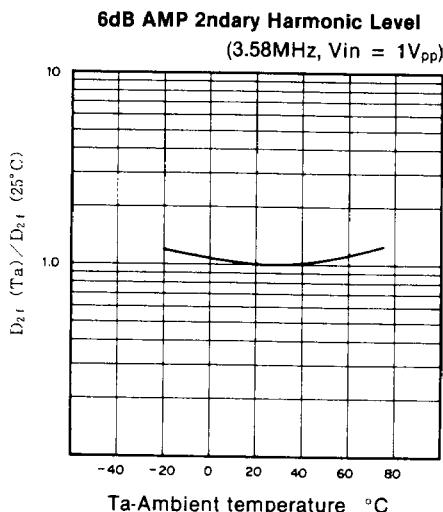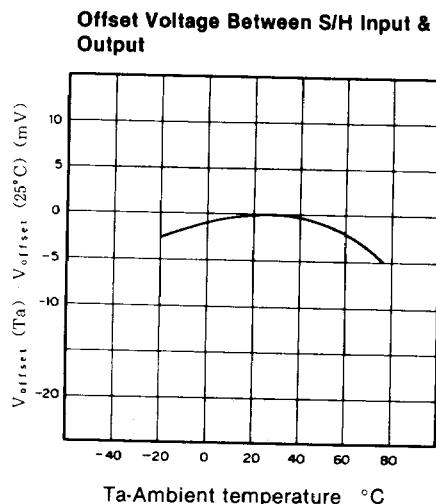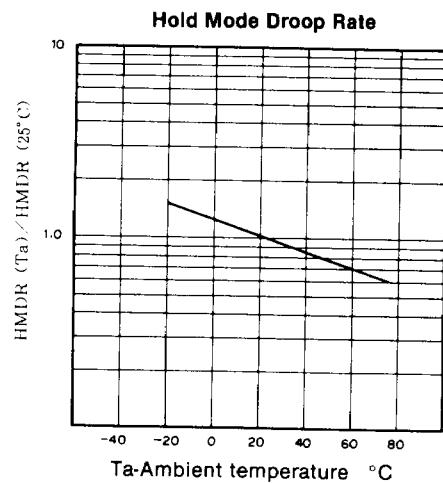Changes in Characteristics with Temperature

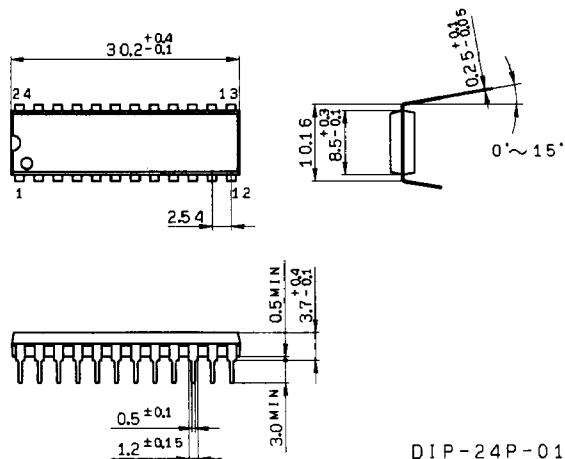Package Outline Unit : mm**24pin DIP(Plastic) 400mil 2.0g**

8bit, 20/15MHz A/D Converter Evaluation Board with CXA1008P/CXA1009P S/H.



Description

CX20052A PCB-3A/3B is an 8 bit A/D converter board for video signal processing. A high speed S/H IC CXA1008P/1009P and a high speed 8 bit A/D converter CX20052A are assembled on single small printed circuit board.

CX20052A PCB-3A with CXA1008P mounted, operates up to 20 MHz of conversion rate, and CX20052A PCB-3B with CXA1009P mounted, operates up to 15 MHz of conversion rate.


Features

- Resolution 8 bit $\pm 1/2$ LSB
- Conversion rate 20 MHz CX20052A PCB-3A
- 15 MHz CX20052A PCB-3B
- Analog input level 1Vp-p
- Digital output level ECL level
- Power supply $\pm 5V$

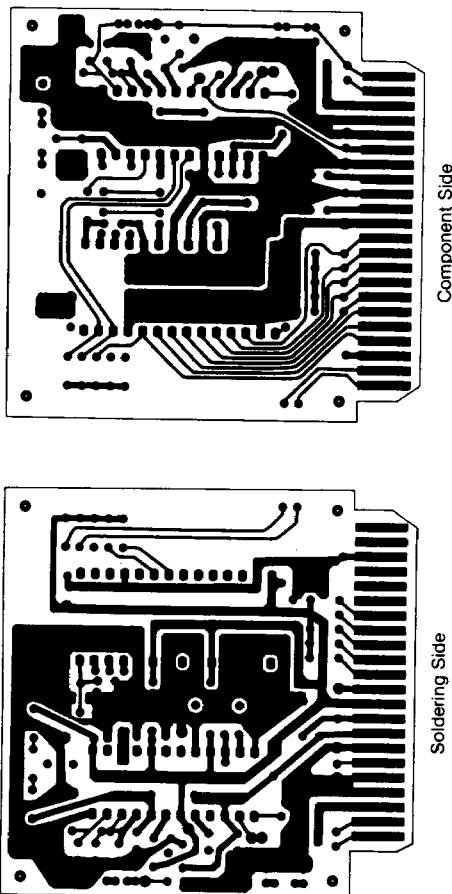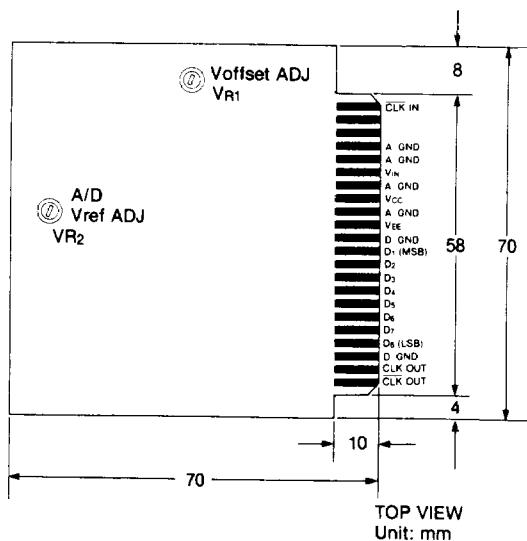

CX20052A PCB-3A/3B Pattern

1. Block diagram

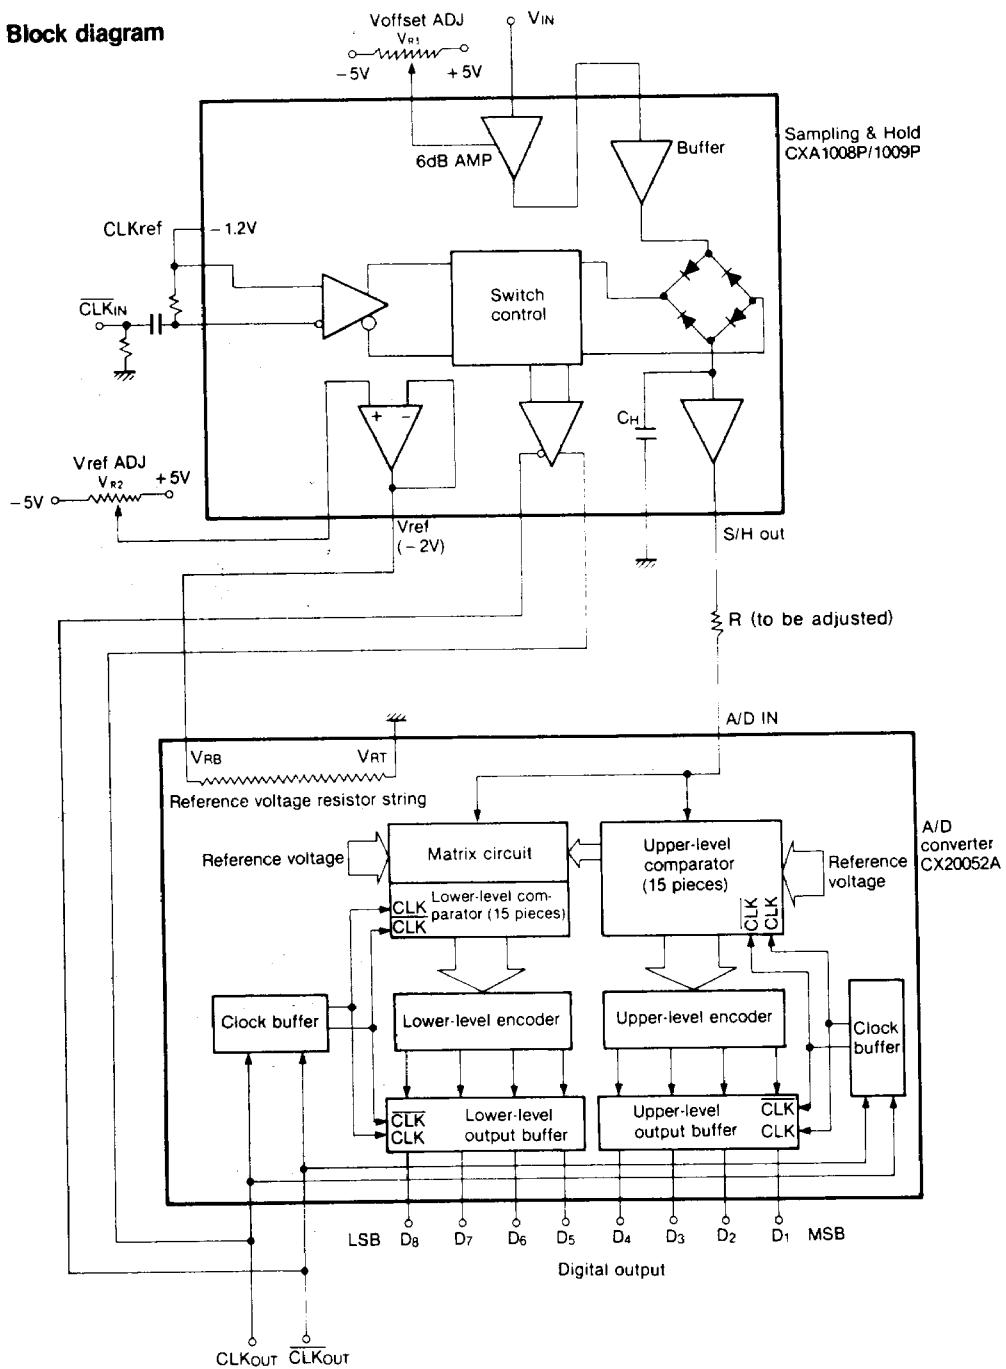

2. Characteristics

1. Supply Voltage

(Ta = 25°C, VEE = -5V, VCC = 5V)

Item		Symbol	Min	Typ	Max	Unit
V _{CC} V _{EE}	+5V	CX20052A PCB-3A	I _{CC}	70	80	mA
		PCB-3B	I _{EE}	220	240	mA
	-5V	CX20052A	I _{CC}	50	60	mA
		PCB-3B	I _{EE}	200	220	mA

2. Analog Input (V_{IN})

Item		Symbol	Min	Typ	Max	Unit
AC Input Voltage Amplitude		V _{IN}			1	V
Offset Adjustable Range			±1.5	±2.0		V
Input Impedance		Z _{in}				Ω
CX20052APCB-3A	,			75		Ω
CX20052APCB-3B				75		Ω

3. Digital Input (CLK IN)

Item		Symbol	Min	Typ	Max	Unit
Input Voltage (p-p)		V _{CLK}	0.3	0.8	4	V
Input Impedance		Z _{INCL}		50		Ω


4. Digital Output (D1 ~ D8) (1.5kΩ to V_{EE})

Item		Symbol	Min	Typ	Max	Unit
Output Voltage		V _{OH}	-0.90	-0.75		V
		V _{OL}		-1.50	-1.35	V

5. Clock Output (CLKOUT, CLK_{OUT}) (See timing chart)

Item		Symbol	CX20052A PCB-3A			CX20052A PCB-3B		
			Min	Typ	Max	Min	Typ	Max
Output voltage	Amplitude	V _{CLK}	0.2	0.3	0.4	0.2	0.3	0.4
	Low Level	V _{CLKL}	-1.2	-1.1	-0.9	-1.2	-1.1	-0.9
Rise time		tr		6	10		6	10
Fall time		tf		12	15		12	15
CLK Delay		τ _F	20	28	34	36	38	45
								ns

3. Timing Chart

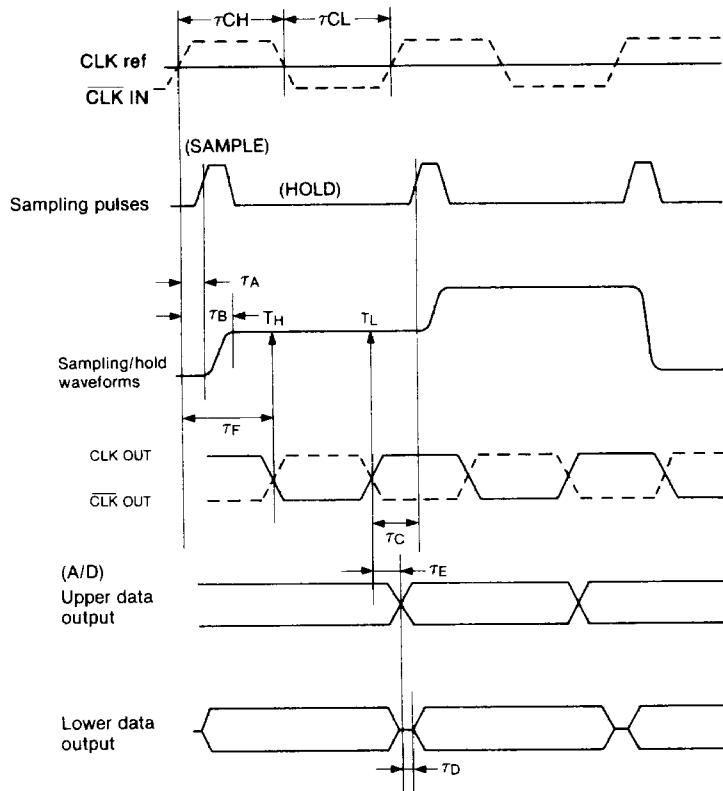

T_H shows a timing when the A/D latches upper 4 bits.

T_L shows a timing when the A/D latches lower 4 bits.

Item	Symbol	CX20052A PCB-3A			CX20052A PCB-3B			Unit
		Min	Typ	Max	Min	Typ	Max	
Clock in	τ_{CH}		25			33		ns
	τ_{CL}		25			33		ns
Sampling delay	T_A		6			12		ns
	T_B		25			36		ns
Clock out	T_F	20	28	34	36	38	45	ns
Data delay	T_E			8			8	ns
	T_D			4			4	ns

4. Adjustment

(1) Offset Voltage (V_{offset} ADJ)

V_{R1} should be adjusted so that the S/H output meets the input voltage range of the A/D (0 to -2V).

(2) A/D reference voltage (V_{ref} ADJ).

The reference voltage of the A/D (TP5) is to be -2V. V_{R2} should be adjusted.

5. Output Data Format


The input of the A/D converter IC (S/H out) is quantized in 8 bit within the reference voltage range of V_{RT} and V_{RB} . The V_{RT} and V_{RB} are set at 0V and -2V respectively on the printed circuit board.

Step	A/D input signal voltage	Digital output code	
		MSB	LSB
0 0 0	over 0. 0 0 0 0 V 0. 0 0 0 0 V (V_{RT})	1 1 1 1 1 1 1 1	1 1 1 1 1 1 1 1
1 2 7	-0. 9 9 6 1 V	1 0 0 0 0 0 0 0	.
1 2 9	-1. 0 0 3 9 V	0 1 1 1 1 1 1 1	.
2 5 5	under -2. 0 0 0 0 V -2. 0 0 0 0 V (V_{RB})	0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0

6. Note on application

- (1) Although the pull down resistors (R_L : 4.3kΩ) are mounted on the PCB, additional pull down is recommended in an external circuit. The output current at the A/D output terminal should not exceed 10 mA.
- (2) Digital output data should be latched by an external circuit to achieve a rated performance. Output data can be latched at a rising edge of CLK_{OUT} . CLK_{IN} AND \bar{CLK}_{OUT} should be reshaped by an ECL line receiver such as MC10116 in an external circuit.
- (3) The reference voltage is derived from the V_{EE} by a simple resistor dividing network. The power supply ($\pm 5V$) should be stabilized to reduce voltage drift of the reference voltage.
- (4) To reduce CLK leak, use waveforms similar to sine waves as far as possible up to the CLK input. For satisfactory operation, a CLK input amplitude of around 300m V_{PP} is enough.
- (5) When the S/H input deviates over 1.2V during one sampling period, the output may contain errors.

CX20052A PCB-3A/3B Circuit

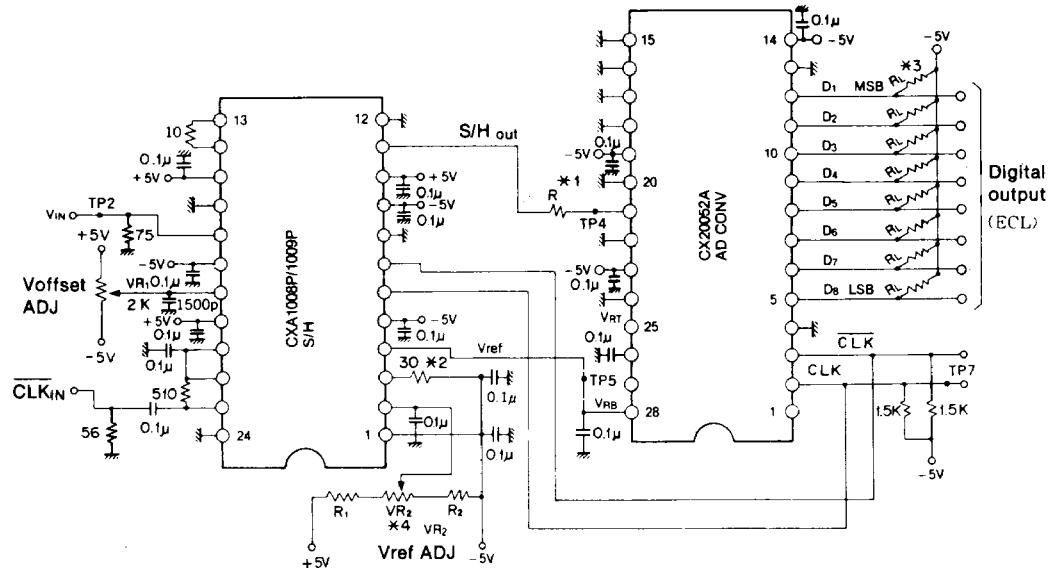

*1. R is a ringing preventing resistor. Select between 10 to 50Ω according to pattern length.


*2. Pulldown R for V_{ref}.

*3. $R_L = 4.3K\Omega$

*4. $R_1 = 2K\Omega$, $VR_2 = 2K\Omega$, $R_2 = 1K\Omega$

Additional Information on CX20052A


Pin Configuration (Top View)

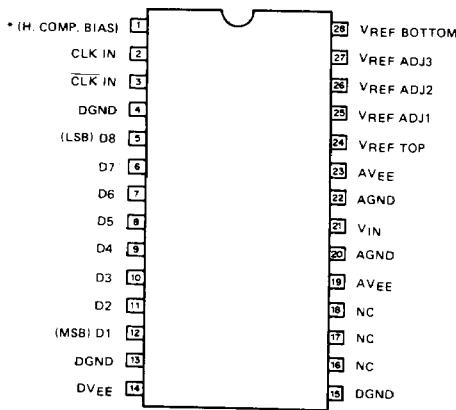

Pin Description

No.	Symbol	Description
1	H-COMP BIAS	Pin connected to internal comparator. It should not be connected to outer circuit.
2	CLK IN	CLOCK input pin.
3	CLK IN	CLOCK input pin.
4	DGND	Ground pin of digital circuit.
15	DGND	Ground pin of digital circuit.
17	NC	Non-connection.
18	NC	
24	VREF (T)	Reference voltage pin. (0V)
25	VREF ADJ1	Reference voltage adjusting pin.
26	VREF ADJ2	(Usually it should be connected to GND through 0.047 μ F capacitor.)
27	VREF ADJ3	
28	VREF (B)	Reference voltage pin. (-2.0V)

- (*) Reference resistors have adjusting pins as shown below. Usually these pins are connected to GND through 0.047 μ F capacitors. When an adjustment is required, they should be connected to GND or VREF (B) through resistors.

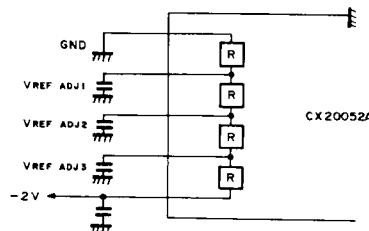

Output Coding

Step	Input signal voltage	Output digital code	
		MSB	LSB
000	0.0000V		11111111
127	-0.9961V		10000000
128	-1.0039V		01111111
129	-1.0118V		01111110
.	.	.	.
255	-2.0000V		00000000