



Pin Assignment (top view)

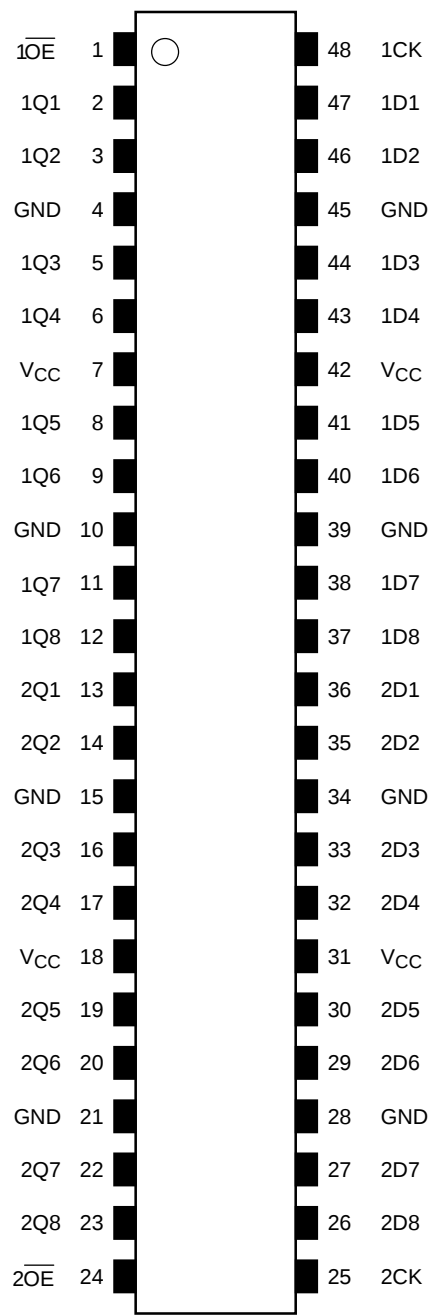

IEC Logic Symbol

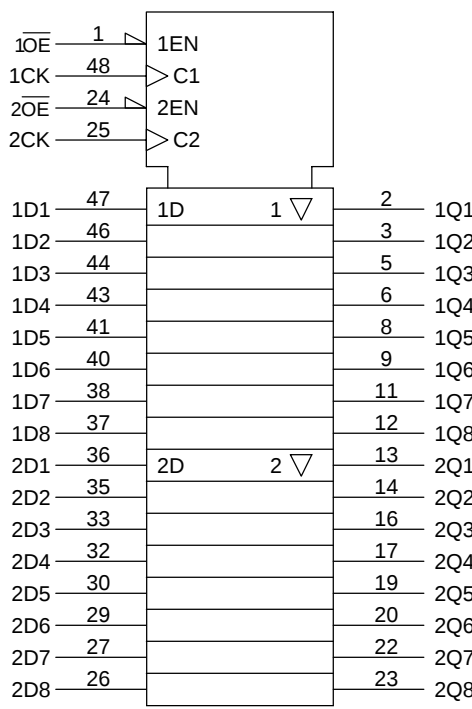


Truth Table

Inputs			Outputs
$\overline{1OE}$	1CK	1D1-1D8	1Q1-1Q8
H	X	X	Z
L		X	Qn
L		L	L
L		H	H

Inputs			Outputs
$\overline{2OE}$	2CK	2D1-2D8	2Q1-2Q8
H	X	X	Z
L		X	Qn
L		L	L
L		H	H

X: Don't care
Z: High impedance
Qn: No change

System Diagram

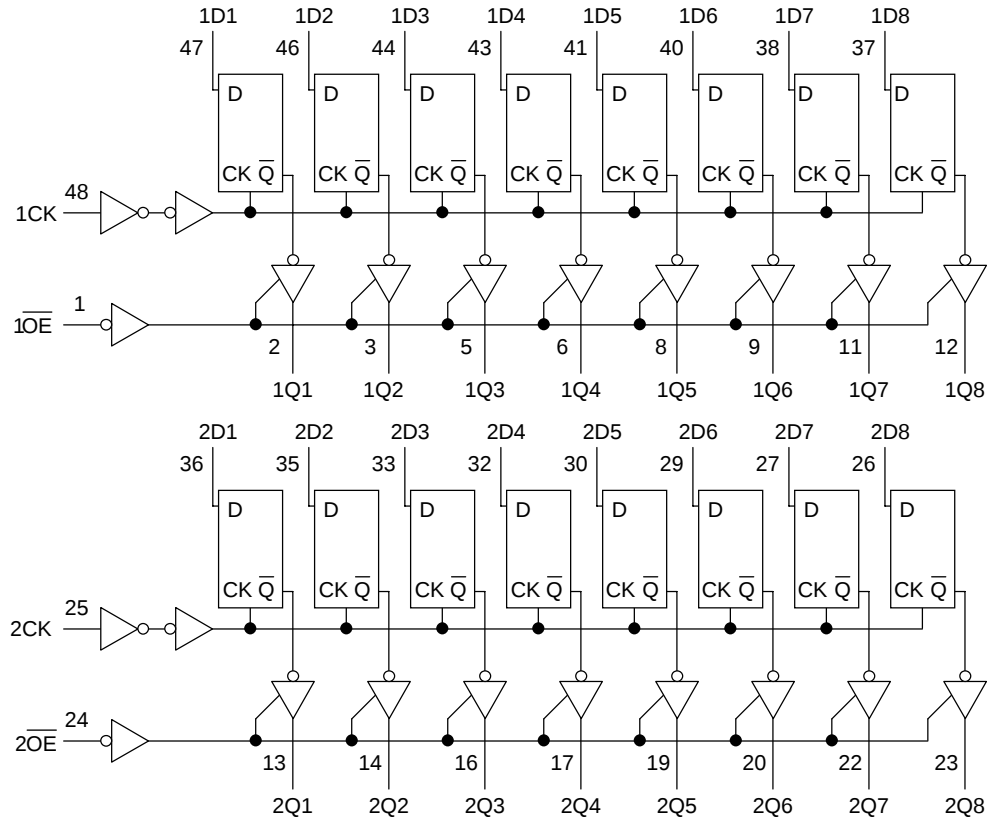

Maximum Ratings

Characteristics		Symbol	Rating	Unit
Power supply voltage		V_{CC}	-0.5 to 4.6	V
DC input voltage	($\overline{OE}$, CK)	V_{IN}	-0.5 to 4.6	V
	(An)		-0.5 to $V_{CC} + 0.5$	
DC output voltage		V_{OUT}	-0.5 to 4.6 (Note 1)	V
			-0.5 to $V_{CC} + 0.5$ (Note 2)	
Input diode current		I_{IK}	-50	mA
Output diode current		I_{OK}	± 50 (Note 3)	mA
Output current		I_{OUT}	± 50	mA
Power dissipation		P_D	400	mW
DC V_{CC} /ground current per supply pin		I_{CC}/I_{GND}	± 100	mA
Storage temperature		T_{stg}	-65 to 150	°C

Note 1: OFF state

Note 2: High or low state. I_{OUT} absolute maximum rating must be observed.

Note 3: $V_{OUT} < GND$, $V_{OUT} > V_{CC}$

Recommended Operating Range (Note 4)

Characteristics		Symbol	Rating	Unit
Power supply voltage		V_{CC}	1.8 to 3.6	V
			1.2 to 3.6 (Note 5)	
Input voltage	($\overline{OE}$, CK)	V_{IN}	-0.3 to 3.6	V
	(An)		0 to V_{CC}	
Output voltage		V_{OUT}	0 to 3.6 (Note 6)	V
			0 to V_{CC} (Note 7)	
Output current		I_{OH}/I_{OL}	± 12 (Note 8)	mA
			± 8 (Note 9)	
			± 4 (Note 10)	
Operating temperature		T_{opr}	-40 to 85	°C
Input rise and fall time		dt/dv	0 to 10 (Note 11)	ns/V

Note 4: Floating or unused control inputs must be held high or low.

Note 5: Data retention

Note 6: OFF state

Note 7: High or low state

Note 8: $V_{CC} = 3.0$ to 3.6 V

Note 9: $V_{CC} = 2.3$ to 2.7 V

Note 10: $V_{CC} = 1.8$ V

Note 11: $V_{IN} = 0.8$ to 2.0 V, $V_{CC} = 3.0$ V

Electrical Characteristics
DC Characteristics ($T_a = -40$ to 85°C , $2.7\text{ V} < V_{CC} \leq 3.6\text{ V}$)

Characteristics		Symbol	Test Condition		Min	Max	Unit
Input voltage	H-level	V_{IH}	—	V_{CC} (V) 2.7 to 3.6	2.0	—	V
	L-level	V_{IL}	—	2.7 to 3.6	—	0.8	
Output voltage	H-level	V_{OH}	$V_{IN} = V_{IH}$ or V_{IL}	$I_{OH} = -100\text{ }\mu\text{A}$	2.7 to 3.6	$V_{CC} - 0.2$	V
				$I_{OH} = -6\text{ mA}$	2.7	2.2	
				$I_{OH} = -8\text{ mA}$	3.0	2.4	
				$I_{OH} = -12\text{ mA}$	3.0	2.2	
	L-level	V_{OL}	$V_{IN} = V_{IH}$ or V_{IL}	$I_{OL} = 100\text{ }\mu\text{A}$	2.7 to 3.6	—	
				$I_{OL} = 6\text{ mA}$	2.7	—	
				$I_{OL} = 8\text{ mA}$	3.0	—	
				$I_{OL} = 12\text{ mA}$	3.0	—	
Input leakage current	($\overline{\text{OE}}$, CK)	I_{IN}	$V_{IN} = 0$ to 3.6 V	2.7 to 3.6	—	± 5.0	μA
	(An)		$V_{IN} = V_{CC}$ or GND	2.7 to 3.6	—	± 5.0	
Bushold input minimum drive hold current		I_I (HOLD)	$V_{IN} = 0.8\text{ V}$	3.0	75	—	μA
			$V_{IN} = 2.0\text{ V}$	3.0	-75	—	
Bushold input over-drive current to change state		I_I (OD)	(Note 12)	3.6	—	450	μA
			(Note 13)	3.6	—	-450	
3-state output OFF state current		I_{OZ}	$V_{IN} = V_{IH}$ or V_{IL} $V_{OUT} = 0$ to 3.6 V	2.7 to 3.6	—	± 10.0	μA
Power-off leakage current		I_{OFF}	$V_{OUT} = 0$ to 3.6 V	0	—	10.0	μA
Quiescent supply current		I_{CC}	$V_{IN} = V_{CC}$ or GND	2.7 to 3.6	—	20.0	μA
			$V_{CC} \leq V_{OUT} \leq 3.6\text{ V}$ (Note 14)	2.7 to 3.6	—	± 20.0	
Increase in I_{CC} per input		ΔI_{CC}	$V_{IH} = V_{CC} - 0.6\text{ V}$	2.7 to 3.6	—	750	μA

Note 12: An external driver must source at least the specified current to switch LOW-to-HIGH.

Note 13: An external driver must sink at least the specified current to switch HIGH-to-LOW.

Note 14: Outputs high impedance only.

DC Characteristics ($T_a = -40$ to 85°C , $2.3\text{ V} \leq V_{CC} \leq 2.7\text{ V}$)

Characteristics		Symbol	Test Condition		V _{CC} (V)	Min	Max	Unit
Input voltage	H-level	V _{IH}	—		2.3 to 2.7	1.6	—	V
	L-level	V _{IL}	—		2.3 to 2.7	—	0.7	
Output voltage	H-level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -100 μA	2.3 to 2.7	V _{CC} - 0.2	—	V
				I _{OH} = -4 mA	2.3	2.0	—	
				I _{OH} = -6 mA	2.3	1.8	—	
				I _{OH} = -8 mA	2.3	1.7	—	
	L-level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.3 to 2.7	—	0.2	
				I _{OL} = 6 mA	2.3	—	0.4	
				I _{OL} = 8 mA	2.3	—	0.6	
Input leakage current	($\overline{\text{OE}}$, CK)	I _{IN}	V _{IN} = 0 to 3.6 V	2.3 to 2.7	—	±5.0	μA	
	(An)		V _{IN} = V _{CC} or GND	2.3 to 2.7	—	±5.0		
Bushold input minimum drive hold current		I _I (HOLD)	V _{IN} = 0.7 V	2.3	45	—	μA	
			V _{IN} = 1.6 V	2.3	-45	—		
Bushold input over-drive current to change state		I _I (OD)	(Note 12)	2.7	—	300	μA	
			(Note 13)	2.7	—	-300		
3-state output OFF state current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V	2.3 to 2.7	—	±10.0	μA	
Power-off leakage current		I _{OFF}	V _{OUT} = 0 to 3.6 V	0	—	10.0	μA	
Quiescent supply current		I _{CC}	V _{IN} = V _{CC} or GND	2.3 to 2.7	—	20.0	μA	
			V _{CC} ≤ V _{OUT} ≤ 3.6 V (Note 14)	2.3 to 2.7	—	±20.0		

Note 12: An external driver must source at least the specified current to switch LOW-to-HIGH.

Note 13: An external driver must sink at least the specified current to switch HIGH-to-LOW.

Note 14: Outputs high impedance only.

DC Characteristics ($T_a = -40$ to 85°C , $1.8\text{ V} \leq V_{CC} < 2.3\text{ V}$)

Characteristics		Symbol	Test Condition		V _{CC} (V)	Min	Max	Unit
Input voltage	H-level	V _{IH}	—		1.8 to 2.3	$0.7 \times V_{CC}$	—	V
	L-level	V _{IL}	—		1.8 to 2.3	—	$0.2 \times V_{CC}$	
Output voltage	H-level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -100 μA	1.8	$V_{CC} - 0.2$	—	V
				I _{OH} = -4 mA	1.8	1.4	—	
	L-level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	1.8	—	0.2	
				I _{OL} = 4 mA	1.8	—	0.3	
Input leakage current	($\overline{\text{OE}}$, CK)	I _{IN}	V _{IN} = 0 to 3.6 V		1.8	—	± 5.0	μA
	(An)		V _{IN} = V _{CC} or GND		1.8	—	± 5.0	
Bushold input minimum drive hold current		I _I (HOLD)	V _{IN} = 0.36 V		1.8	25	—	μA
			V _{IN} = 1.26 V		1.8	-25	—	
Bushold input over-drive current to change state		I _I (OD)	(Note 12)		1.8	—	200	μA
			(Note 13)		1.8	—	-200	
3-state output OFF state current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		1.8	—	± 10.0	μA
Power-off leakage current		I _{OFF}	V _{OUT} = 0 to 3.6 V		0	—	10.0	μA
Quiescent supply current		I _{CC}	V _{IN} = V _{CC} or GND		1.8	—	20.0	μA
			V _{CC} $\leq$ V _{OUT} $\leq$ 3.6 V (Note 14)		1.8	—	± 20.0	

Note 12: An external driver must source at least the specified current to switch LOW-to-HIGH.

Note 13: An external driver must sink at least the specified current to switch HIGH-to-LOW.

Note 14: Outputs high impedance only.

AC Characteristics (Ta = -40 to 85°C, input: $t_r = t_f = 2.0$ ns, $C_L = 30$ pF, $R_L = 500$ Ω)

Characteristics	Symbol	Test Condition	V _{CC} (V)	Min	Max	Unit
Maximum clock frequency	$f_{\max}$	Figure 1, Figure 2	1.8	125	—	MHz
			2.5 ± 0.2	200	—	
			3.3 ± 0.3	250	—	
Propagation delay time (CK-Q)	t_{pLH} t_{pHL}	Figure 1, Figure 2	1.8	1.5	6.0	ns
			2.5 ± 0.2	1.0	4.8	
			3.3 ± 0.3	0.8	3.4	
3-state output enable time	t_{pZL} t_{pZH}	Figure 1, Figure 3	1.8	1.5	7.6	ns
			2.5 ± 0.2	1.0	5.4	
			3.3 ± 0.3	0.8	3.9	
3-state output disable time	t_{pLZ} t_{pHZ}	Figure 1, Figure 3	1.8	1.5	5.3	ns
			2.5 ± 0.2	1.0	4.4	
			3.3 ± 0.3	0.8	4.0	
Minimum pulse width (CK)	t_w (H) t_w (L)	Figure 1, Figure 2	1.8	3.0	—	ns
			2.5 ± 0.2	1.5	—	
			3.3 ± 0.3	1.5	—	
Minimum set-up time	t_s	Figure 1, Figure 2	1.8	2.5	—	ns
			2.5 ± 0.2	1.5	—	
			3.3 ± 0.3	1.5	—	
Minimum hold time	t_h	Figure 1, Figure 2	1.8	1.0	—	ns
			2.5 ± 0.2	1.0	—	
			3.3 ± 0.3	1.0	—	
Output to output skew	t_{osLH} t_{osHL}	(Note 15)	1.8	—	0.5	ns
			2.5 ± 0.2	—	0.5	
			3.3 ± 0.3	—	0.5	

For $C_L = 50$ pF, add approximately 300 ps to the AC maximum specification.

Note 15: Parameter guaranteed by design.

($t_{osLH} = |t_{pLHm} - t_{pLHn}|$, $t_{osHL} = |t_{pHLm} - t_{pHLn}|$)

Dynamic Switching Characteristics (Ta = 25°C, input: t_r = t_f = 2.0 ns, C_L = 30 pF)

Characteristics	Symbol	Test Condition	V _{CC} (V)	Typ.	Unit
Quiet output maximum dynamic	V _{OL}	V _{IH} = 1.8 V, V _{IL} = 0 V (Note 16)	1.8	0.15	V
		V _{IH} = 2.5 V, V _{IL} = 0 V (Note 16)	2.5	0.25	
		V _{IH} = 3.3 V, V _{IL} = 0 V (Note 16)	3.3	0.35	
Quiet output minimum dynamic	V _{OL}	V _{IH} = 1.8 V, V _{IL} = 0 V (Note 16)	1.8	-0.15	V
		V _{IH} = 2.5 V, V _{IL} = 0 V (Note 16)	2.5	-0.25	
		V _{IH} = 3.3 V, V _{IL} = 0 V (Note 16)	3.3	-0.35	
Quiet output minimum dynamic	V _{OH}	V _{IH} = 1.8 V, V _{IL} = 0 V (Note 16)	1.8	1.55	V
		V _{IH} = 2.5 V, V _{IL} = 0 V (Note 16)	2.5	2.05	
		V _{IH} = 3.3 V, V _{IL} = 0 V (Note 16)	3.3	2.65	

Note 16: Parameter guaranteed by design.

Capacitive Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Condition	V _{CC} (V)	Typ.	Unit
Input capacitance	C _{IN}	—	1.8, 2.5, 3.3	6	pF
Output capacitance	C _O	—	1.8, 2.5, 3.3	7	pF
Power dissipation capacitance	C _{PD}	f _{IN} = 10 MHz (Note 17)	1.8, 2.5, 3.3	20	pF

Note 17: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:

$$I_{CC (opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/16 \text{ (per bit)}$$

AC Test Circuit

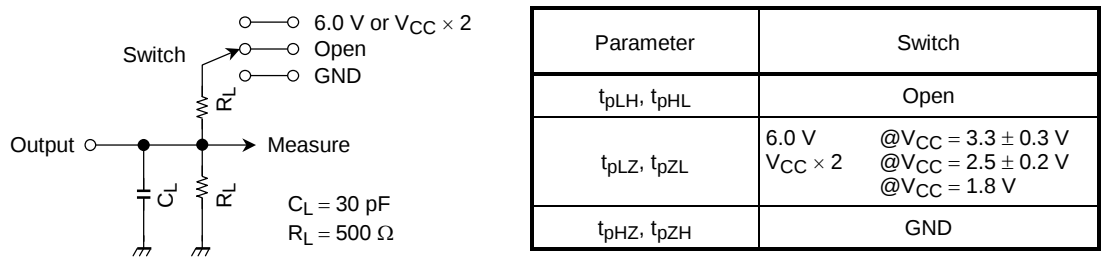


Figure 1

AC Waveform

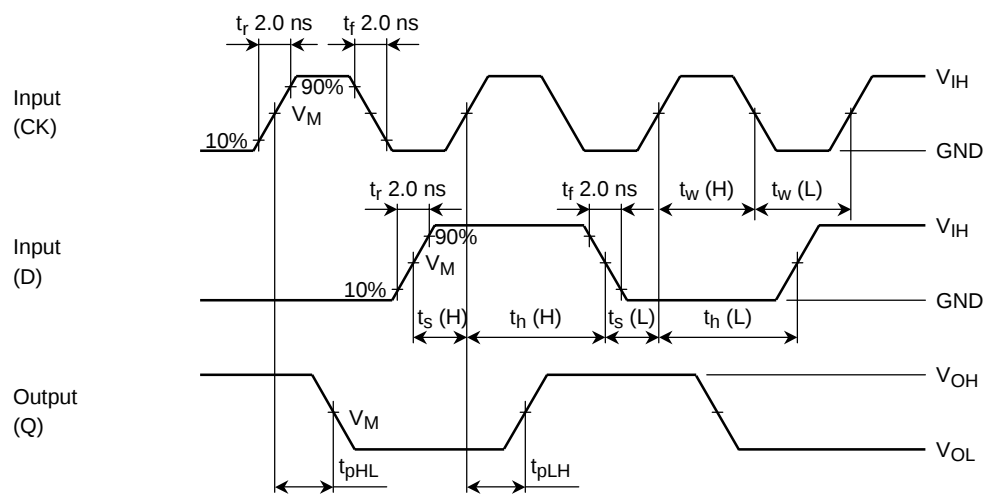


Figure 2 t_{pLH} , t_{pHL} , t_w , t_s , t_h



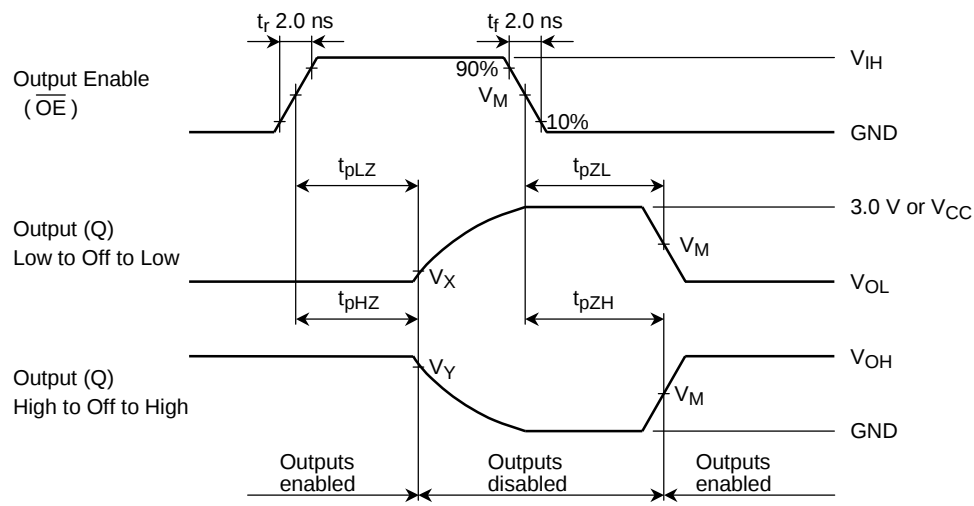


Figure 3 t_{pLZ} , t_{pHZ} , t_{pZL} , t_{pZH}

Symbol	V_{CC}		
	$3.3 \pm 0.3\text{ V}$	$2.5 \pm 0.2\text{ V}$	1.8 V
V_{IH}	2.7 V	V_{CC}	V_{CC}
V_M	1.5 V	$V_{CC}/2$	$V_{CC}/2$
V_X	$V_{OL} + 0.3\text{ V}$	$V_{OL} + 0.15\text{ V}$	$V_{OL} + 0.15\text{ V}$
V_Y	$V_{OH} - 0.3\text{ V}$	$V_{OH} - 0.15\text{ V}$	$V_{OH} - 0.15\text{ V}$

TSSOP48-P-0061-0.50

Unit : mm

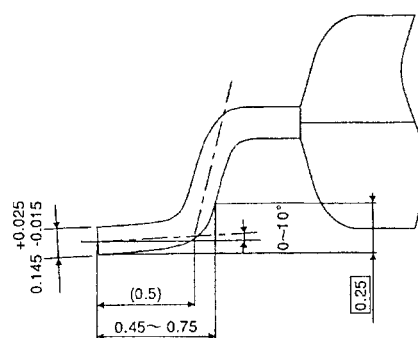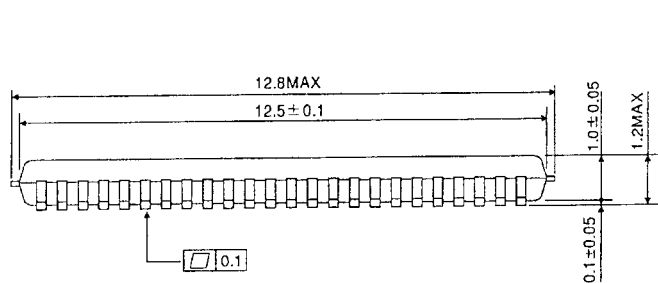

Weight: 0.25 g (typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.