


D2229UK

METAL GATE RF SILICON FET

MECHANICAL DATA

Dimensions in mm.

GOLD METALLISED MULTI-PURPOSE SILICON DMOS RF FET 2.5W – 12.5V – 1GHz SINGLE ENDED

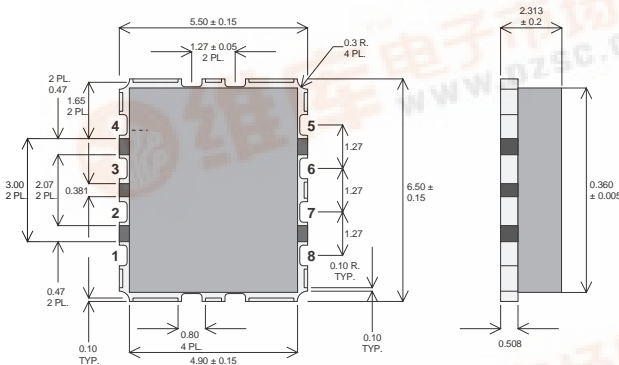

F-0127 PACKAGE

- PIN 1 – SOURCE
- PIN 2 – DRAIN
- PIN 3 – DRAIN
- PIN 4 – SOURCE
- PIN 5 – SOURCE
- PIN 6 – GATE
- PIN 7 – GATE
- PIN 8 – SOURCE

FEATURES

- SIMPLIFIED AMPLIFIER DESIGN
- SUITABLE FOR BROAD BAND APPLICATIONS
- VERY LOW C_{rss}
- SIMPLE BIAS CIRCUITS
- LOW NOISE
- HIGH GAIN – 10 dB MINIMUM

Ceramic Material: Alumina.
Parts can also be supplied with AlN or BeO for improved thermal resistance.
Contact Semelab for details.

APPLICATIONS

- HF/VHF/UHF COMMUNICATIONS
from 1 MHz to 2 GHz

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C unless otherwise stated)

P _D	Power Dissipation	17.5W
BV _{DSS}	Drain – Source Breakdown Voltage	40V
BV _{GSS}	Gate – Source Breakdown Voltage	±20V
I _{D(sat)}	Drain Current	2A
	Storage Temperature	-65 to 150°C
	Maximum Operating Junction Temperature	200°C



ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{DSS} Drain–Source Breakdown Voltage	$V_{GS} = 0$ $I_D = 10\text{mA}$	40			V
I_{DSS} Zero Gate Voltage Drain Current	$V_{DS} = 12.5\text{V}$ $V_{GS} = 0$			1	mA
I_{GSS} Gate Leakage Current	$V_{GS} = 20\text{V}$ $V_{DS} = 0$			1	μA
$V_{GS(th)}$ Gate Threshold Voltage*	$I_D = 10\text{mA}$ $V_{DS} = V_{GS}$	0.5		7	V
g_{fs} Forward Transconductance*	$V_{DS} = 10\text{V}$ $I_D = 0.2\text{A}$	0.18			S
G_{PS} Common Source Power Gain	$P_O = 2.5\text{W}$	10			dB
η Drain Efficiency	$V_{DS} = 12.5\text{V}$ $I_{DQ} = 0.1\text{A}$	40			%
VSWR Load Mismatch Tolerance	$f = 1\text{GHz}$	20:1			—
C_{iss} Input Capacitance	$V_{DS} = 0\text{V}$ $V_{GS} = -5\text{V}$ $f = 1\text{MHz}$			12	pF
C_{oss} Output Capacitance	$V_{DS} = 12.5\text{V}$ $V_{GS} = 0$ $f = 1\text{MHz}$			10	pF
C_{rss} Reverse Transfer Capacitance	$V_{DS} = 12.5\text{V}$ $V_{GS} = 0$ $f = 1\text{MHz}$			1	pF

* Pulse Test: Pulse Duration = 300 μs , Duty Cycle $\leq 2\%$

THERMAL DATA

$R_{THj-case}$	Thermal Resistance Junction – Case	Max. 10 $^{\circ}\text{C} / \text{W}$
----------------	------------------------------------	---------------------------------------