


Digital Delay Units

SERIES DDU-7

10 Taps (14 pins DIP) T²L Interfaced

**data
delay
devices, inc.**



(Military Type)

Features:

- Completely interfaced for TTL and DTL application
- No external components required
- P.C. board space economy achieved
- Fits standard 14 pins DIP socket
- Operates over full military temperature range


Specifications:

- **No. Taps:** 10 equally spaced taps
- **Total Delay Tolerance:** $\pm 5\%$ or better, or 2 NS whichever is greater.
- **Rise-time:** 4 NS typically
- **Temperature coefficient:** 100 PPM/ $^{\circ}\text{C}$
- **Temperature range:** -55°C to $+125^{\circ}\text{C}$
- **Supply voltage:** 4.5 to 5.5 Vdc.
- **Logic 1 input current:** 100 μA max.
- **Logic 0 input current:** -4 ma. max.
- **Logic 1 V out:** 2.5 V min.
- **Logic 0 V out:** 0.5 V max.
- **Logic 1 Fan-out:** 20/tap max.
- **Logic 0 Fan-out:** 10/tap max.
- **Power Dissipation:** 740 MW max.

Test Conditions:

- Input Pulse Width: $\geq 150\%$ of total delay.
- Time delay measured @ 1.5 V on rising edge.
- Unless otherwise specified all time-delays are referenced to input of delay line.
- Rise-time is measured from .75 V to 2.4 V of leading edge.
- All measurements made @ $V_{CC} = 5\text{V}$; $T_A = -25^{\circ}\text{C}$.

Part No.	Total Delay NS	Delay Per Tap NS
*DDU-7-10	9	1 $\pm$.4
*DDU-7-20	18	2 $\pm$.5
*DDU-7-25	22.5	2.5 $\pm$.7
*DDU-7-50	45	5.0 $\pm$ 1.5
DDU-7-100	100	10.0 $\pm$ 2.0
DDU-7-150	150	15.0 $\pm$ 2.0
DDU-7-200	200	20.0 $\pm$ 2.0
DDU-7-250	250	25.0 $\pm$ 2.0
DDU-7-300	300	30.0 $\pm$ 3.0
DDU-7-400	400	40.0 $\pm$ 4.0
DDU-7-500	500	50.0 $\pm$ 5.0

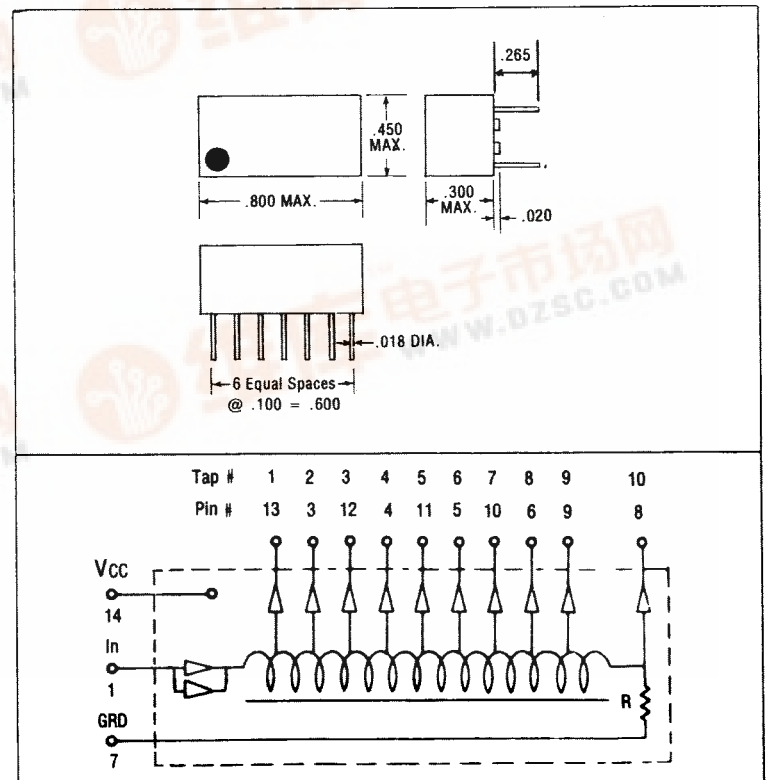

Time delay referenced to 1st tap. Two (2) gates in parallel for input buffer. 6 NS $\pm$ 1 NS inherent delay.