

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

DF20SC4M

40V 20A

FEATURES

SMT

T_j150P_{RRSM} avalanche guaranteed

High current capacity with Small Package

APPLICATION

Switching power supply

DC/DC converter


Home Appliances, Office Equipment

Telecommunication

OUTLINE DIMENSIONS

Case : STO-220

Unit : mm

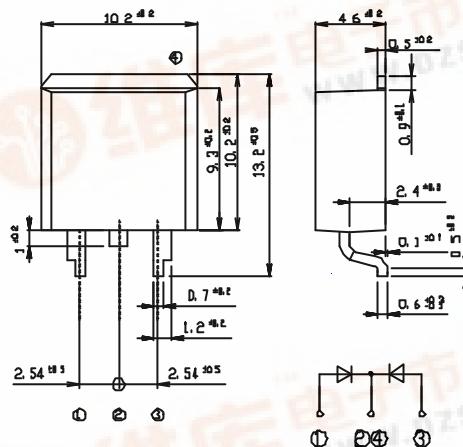

RATINGS


Absolute Maximum Ratings (If not specified T_c=25)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40 ~ 150	
Operating Junction Temperature	T _j		150	
Maximum Reverse Voltage	V _{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Rating for each diode I _O /2, T _c =122	20	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25	230	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μs, Rating of per diode, T _j = 25	330	W


Electrical Characteristics (If not specified T_c=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =10A, Pulse measurement, Rating of per diode	Max.0.55	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.7.5	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V, Rating of per diode	Typ.390	pF
Thermal Resistance	j _C	junction to case	Max.1.7	/W


DF20SC4M Forward Voltage

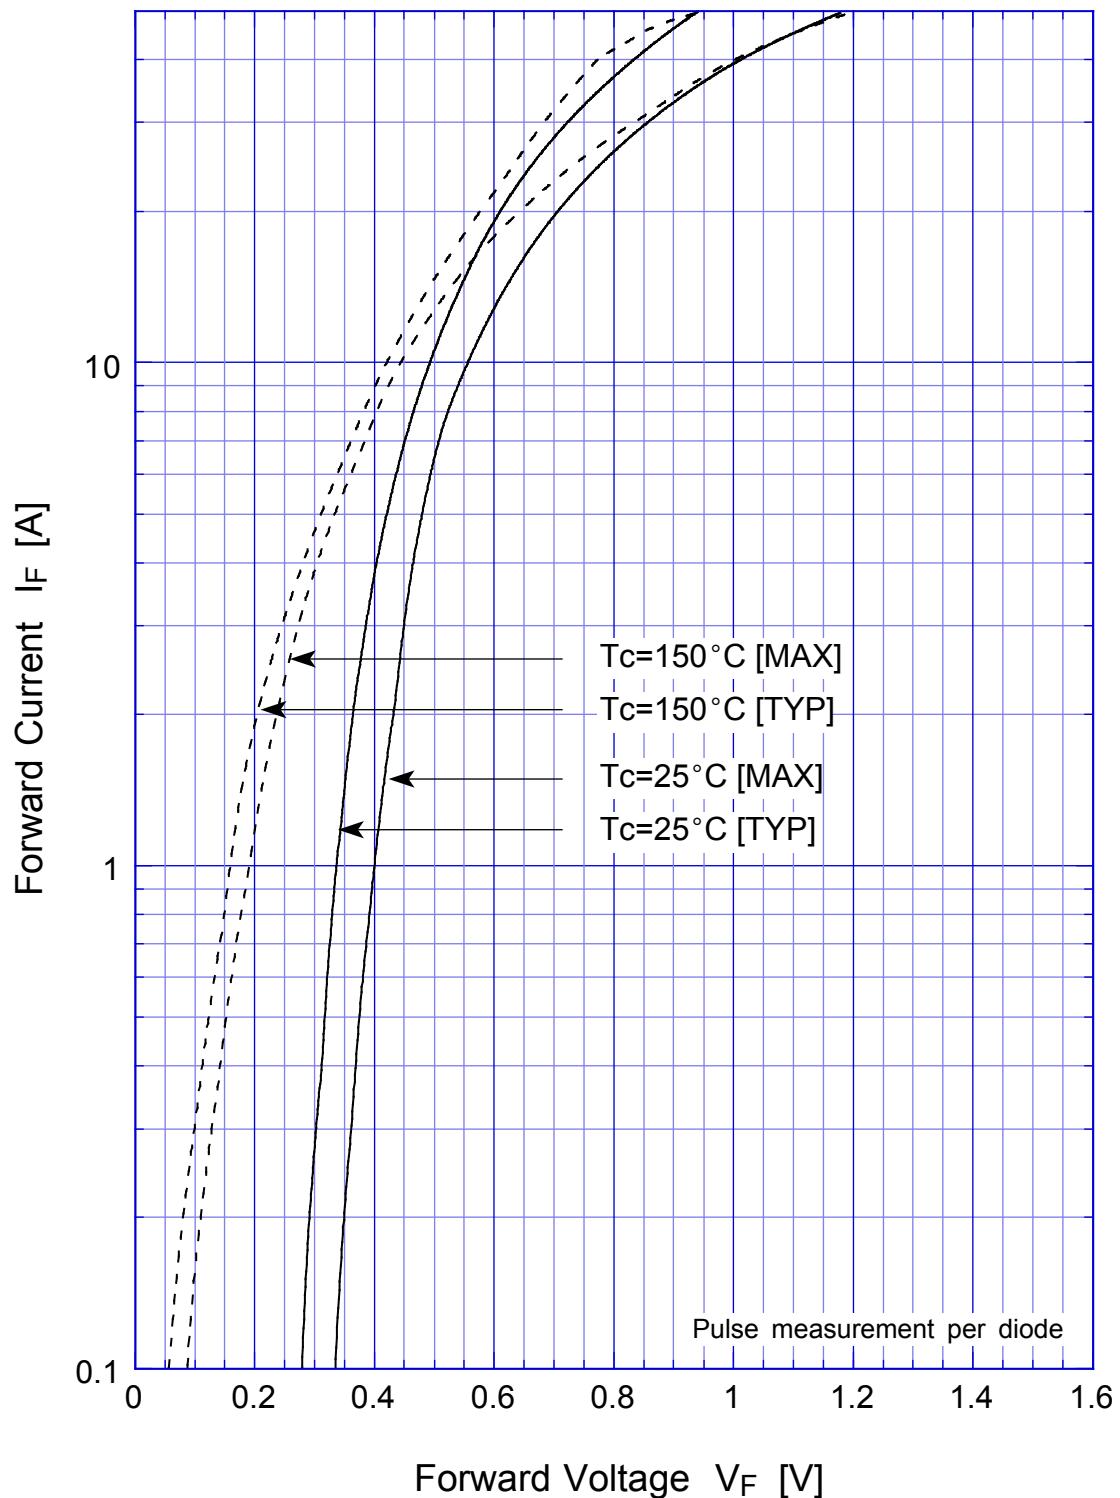



DF20SC4M Junction Capacitance

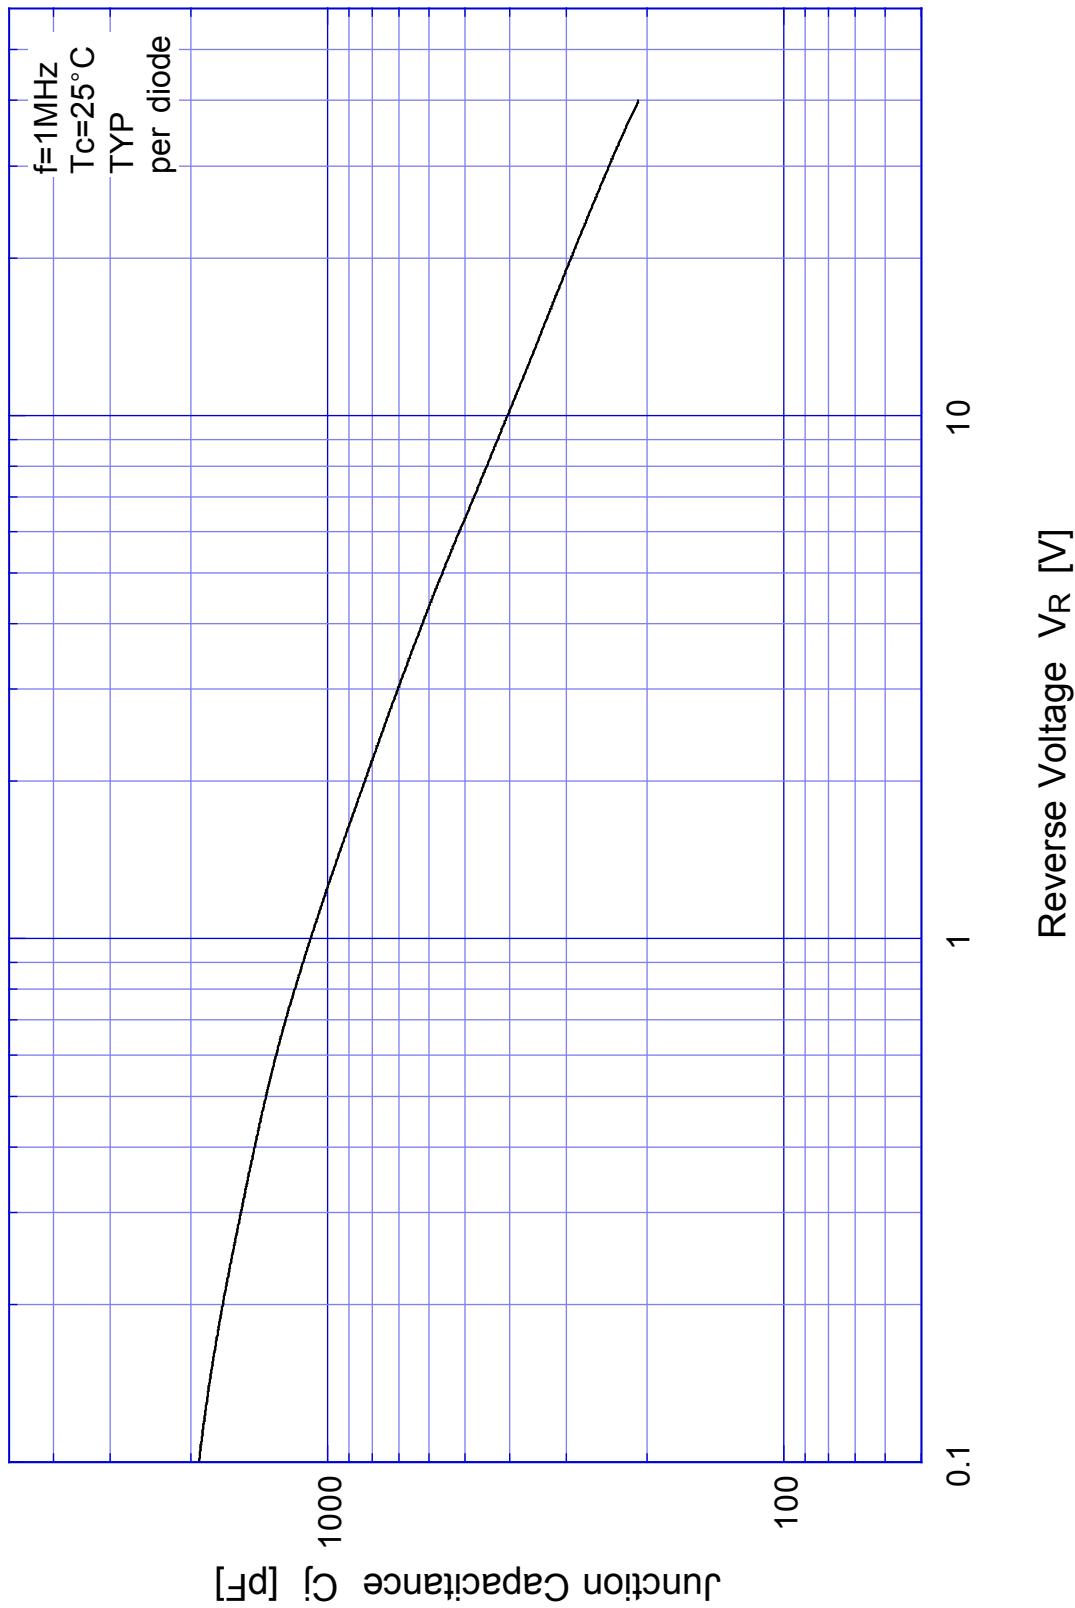


DF20SC4M Reverse Current

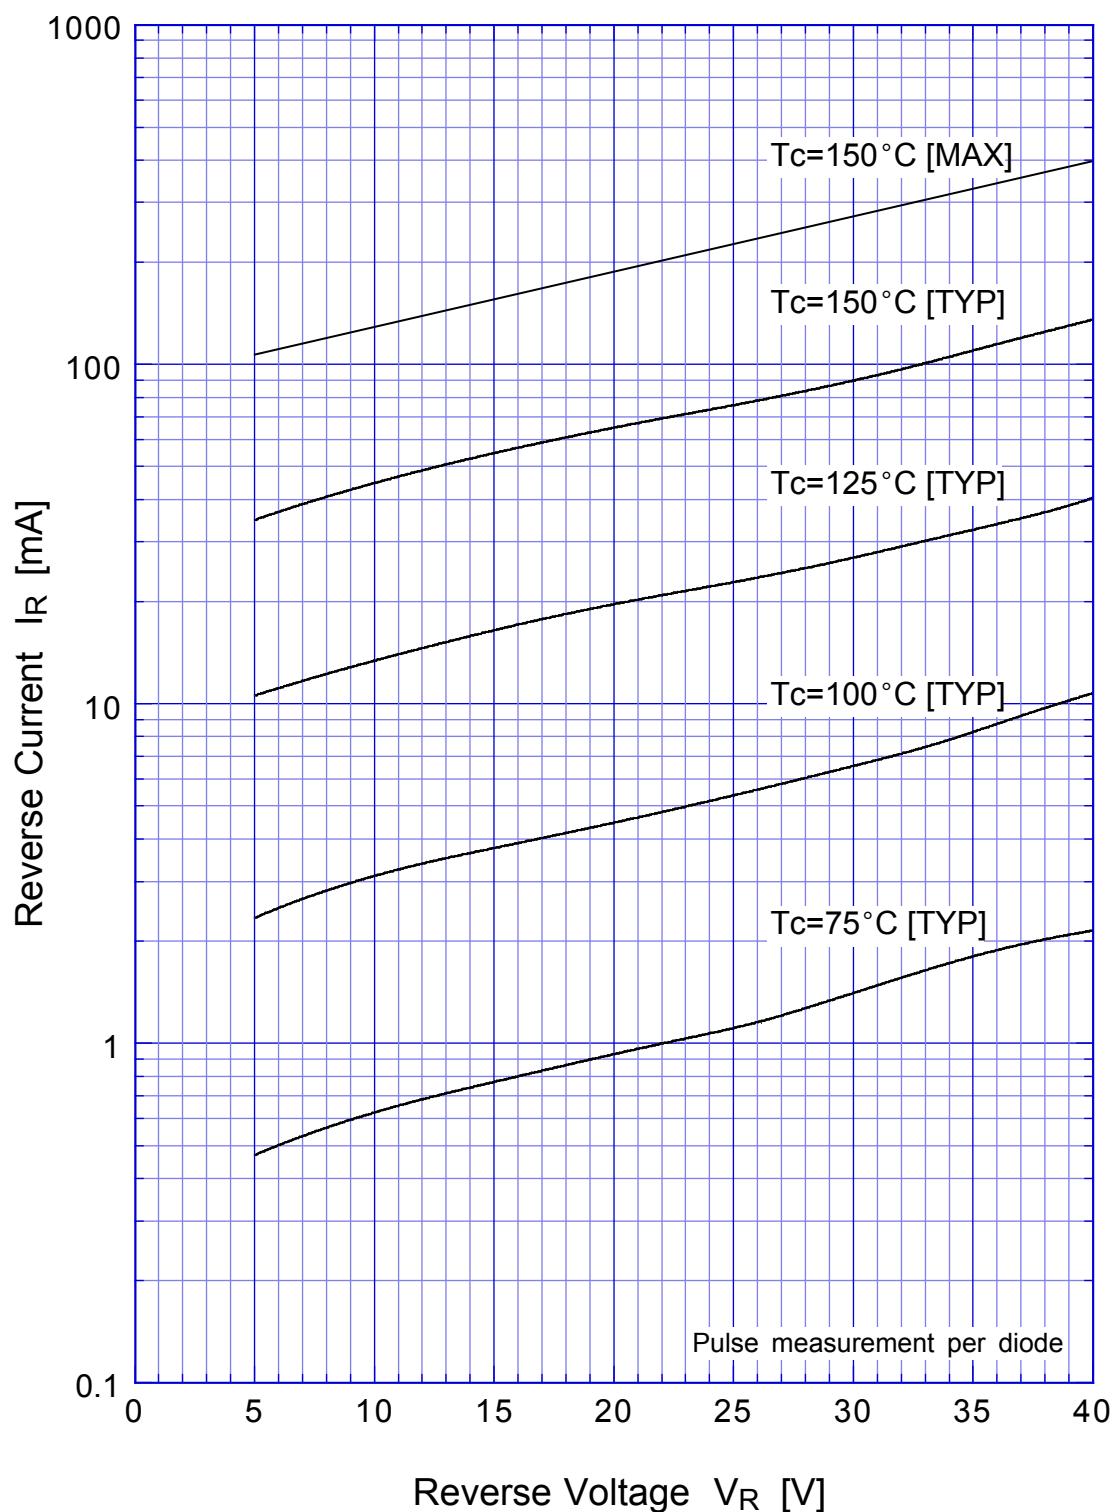


DF20SC4M Reverse Power Dissipation

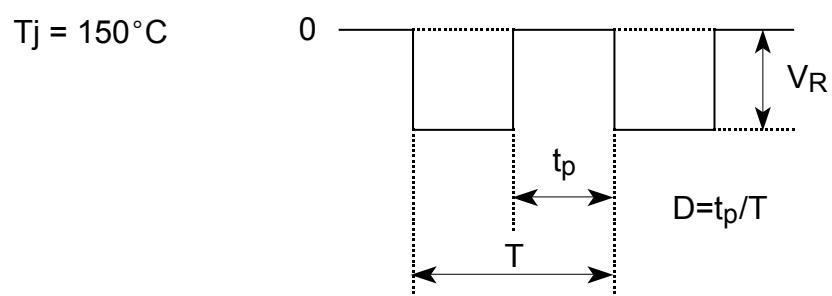
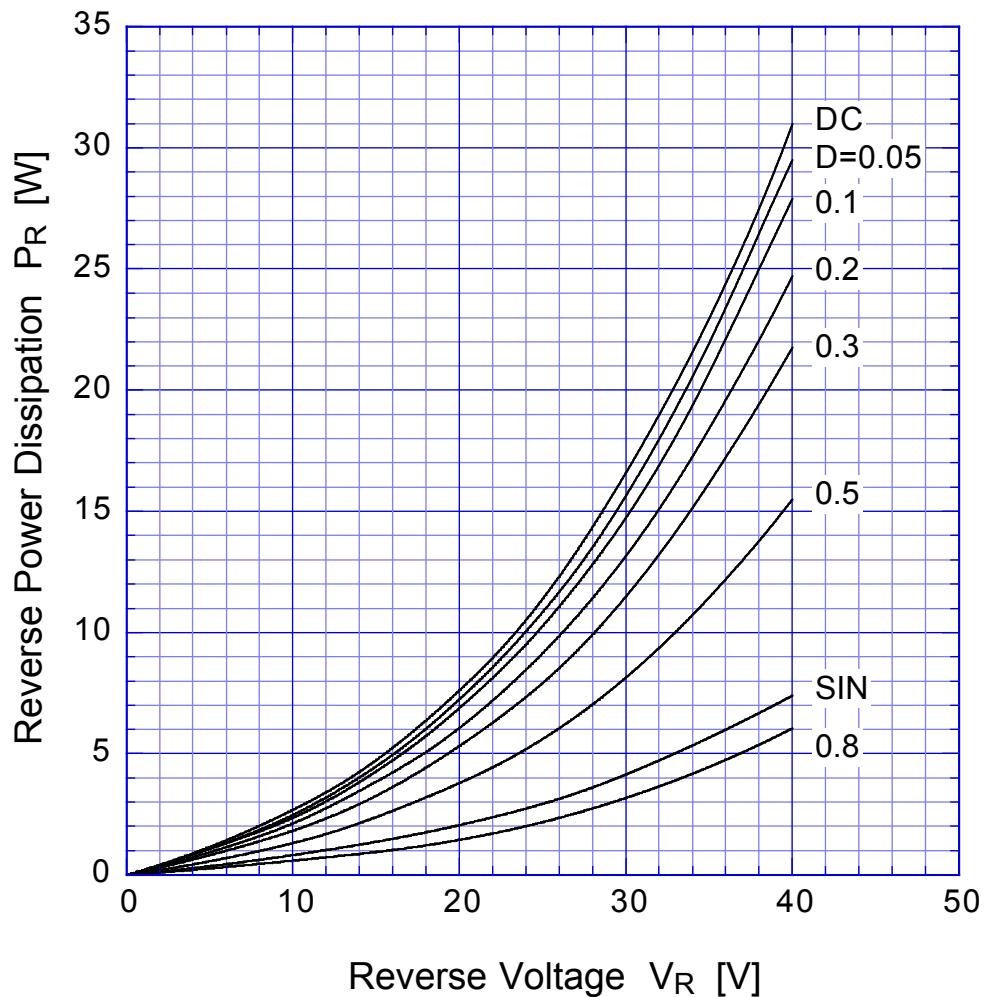


DF20SC4M Forward Power Dissipation

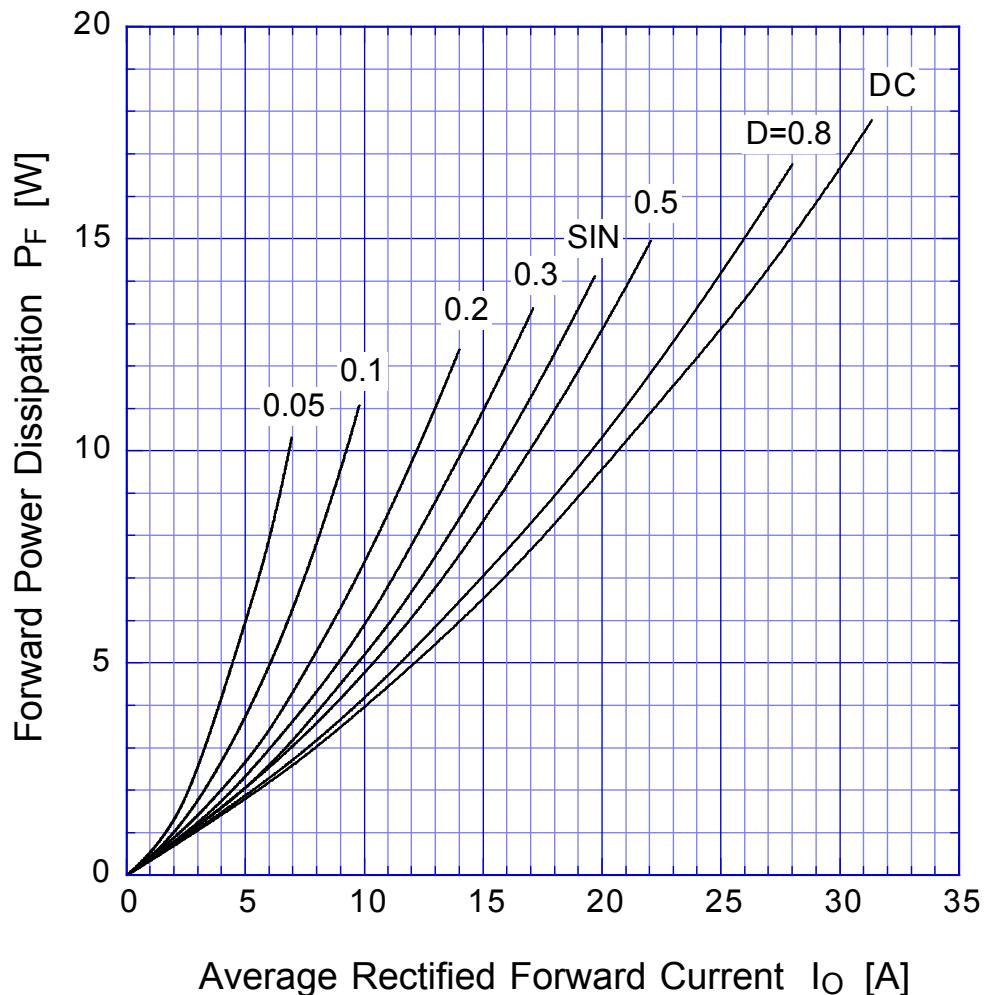


$T_J = 150^\circ\text{C}$


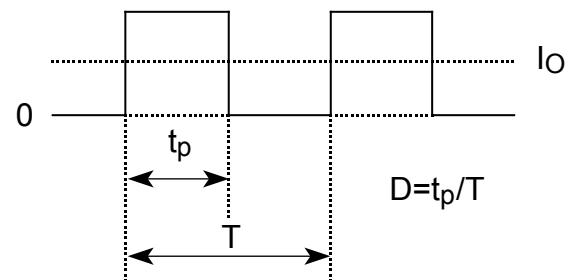


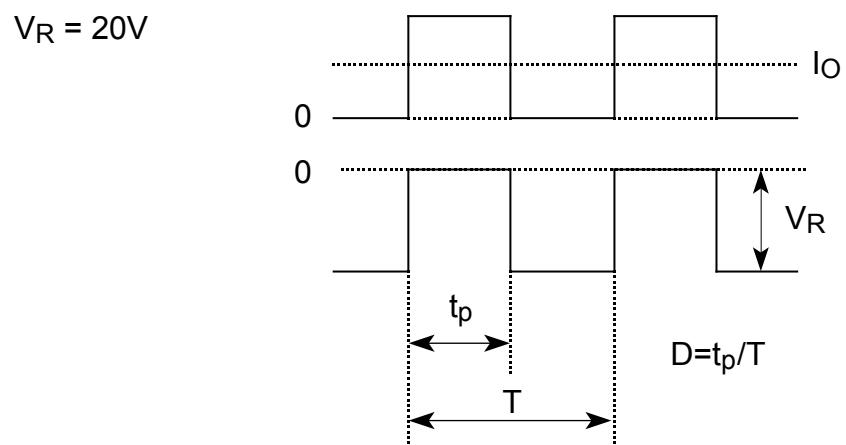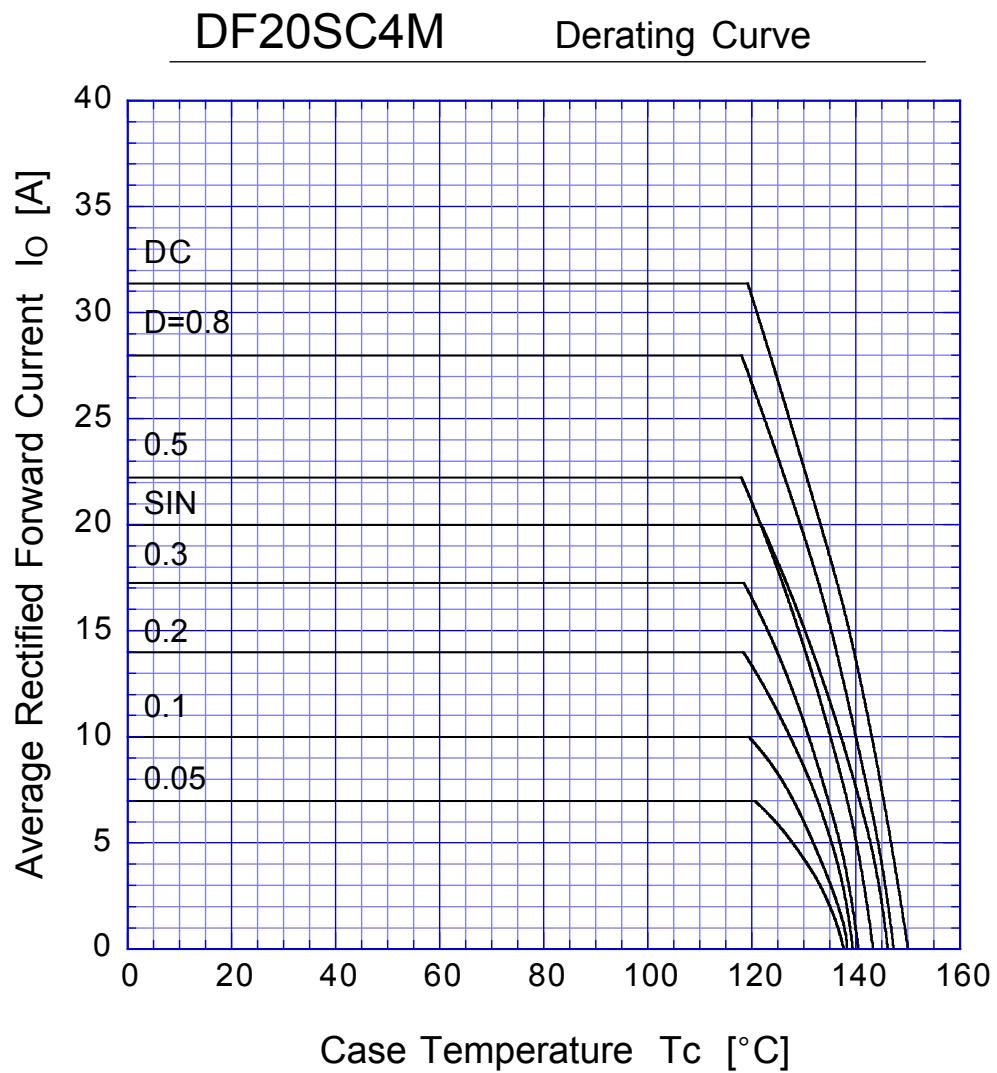

DF20SC4M Peak Surge Forward Capability

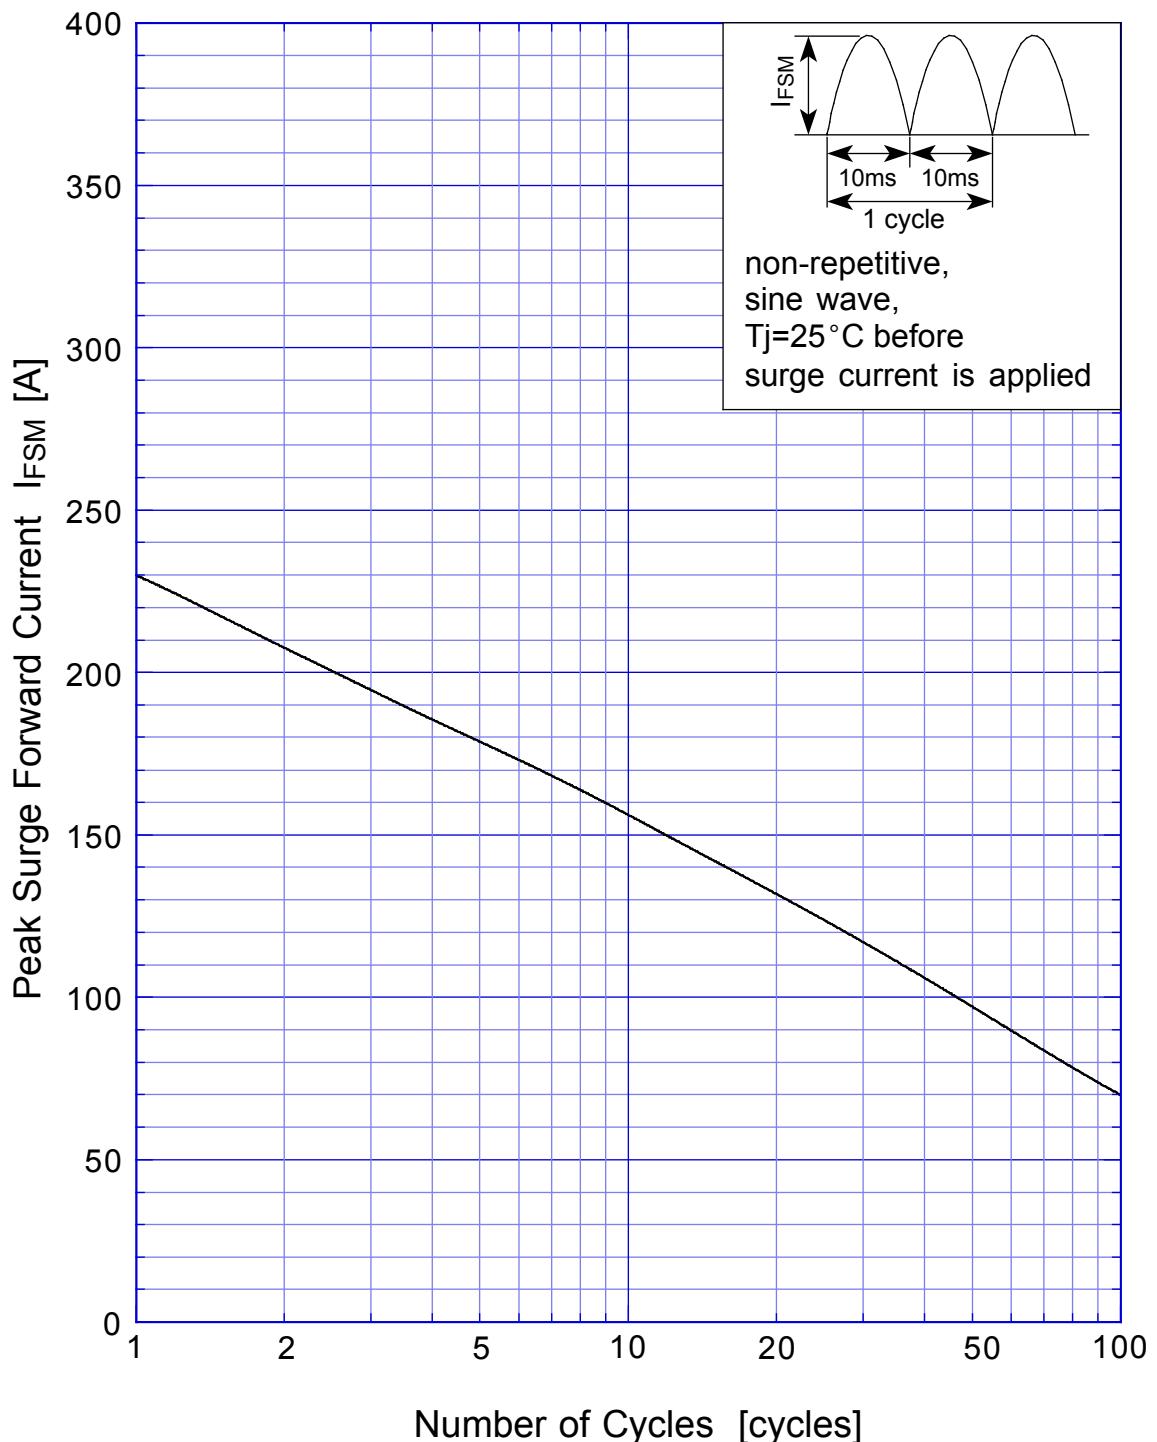

SBD Repetitive Surge Reverse Power Derating Curve

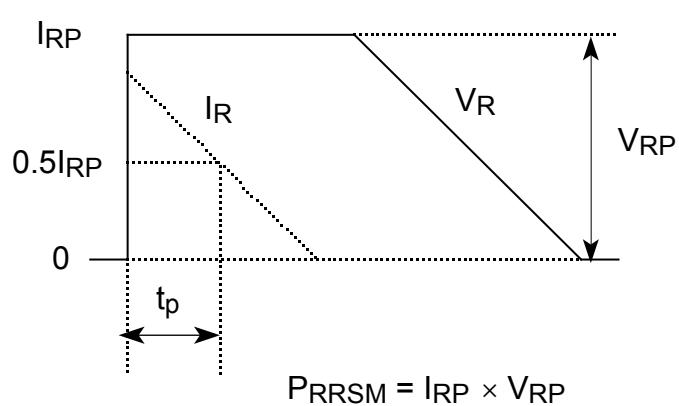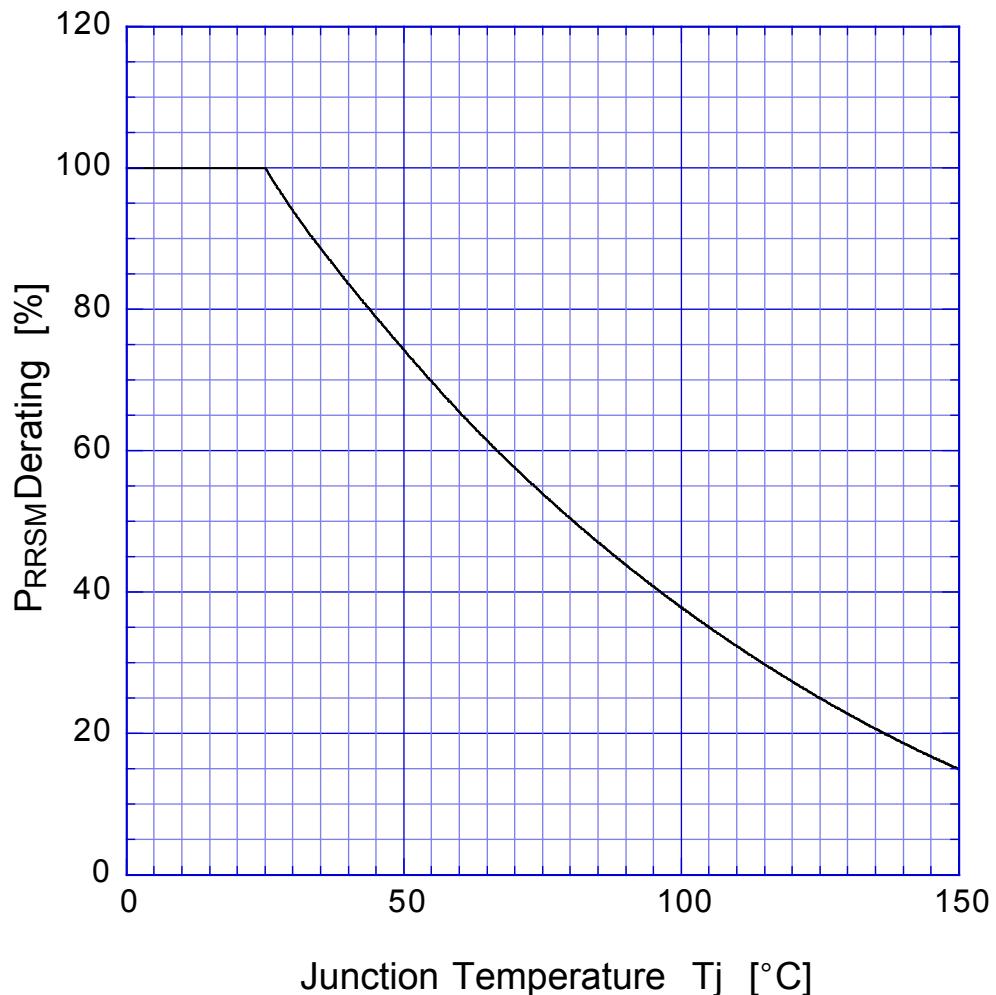

SBD Repetitive Surge Reverse Power Capability

