

MONOLITHIC AMPLIFIERS

50Ω

BROADBAND DC to 8 GHz

NEW!


low power, up to +13.4 dBm output

all specifications at 25°C

◆ MODEL NO.	★ FREQ. GHz	GAIN , dB Typical								MAXIMUM POWER (dBm) at 2 GHz*			DYNAMIC RANGE at 2 GHz*		VSWR (:1) Typ.				ABSO- LUTE MAX. RATING ²		DC OPERATING POWER ³ at Pin 3				THERMAL RESIS- TANCE ⁴		CASE STYLE		C ONN ECT ION	PRICE \$
		over frequency, GHz								Output (1 dB Comp.) Typ.	Input (no dmg) Typ.	NF (dB) Typ.	IP3 (dBm) Typ.	In DC-3 GHz	3-f ^{*,**} GHz	DC-3 GHz	3-f ^{*,**} GHz	I (mA)	P (mW)	Current (mA)	Device Volt. Typ.	Min	Max	θjc Typ. °C/W	Note B					
		0.1	1	2	3	4	6 [†]	f _u	Min.@ 2GHz																					
Gali-1	DC-8	12.7	12.5	11.8	11.3	10.5	10.5	11.0	9	12.2	10.5	15	4.5	27	1.3	1.7	1.4	1.8	55	225	40	3.4	3.0	4.1	108	DF782	mz	.99		
Gali-19	DC-7	12.1	11.7	11.6	10.7	10.8	10.1	11.0	9.6	10.6	9.0	15	6.5	23.7	1.6	1.7	1.5	2.3	55	—	40	3.6	3.2	4.0	311	DF782	mz	1.19		
Gali-21	DC-8	14.3	13.9	13.1	12.4	11.5	11.9	9.0	11.5	12.6	10.5	15	4.0	27	1.1	1.5	1.3	2.5	55	225	40	3.5	3.0	4.1	128	DF782	mz	.99		
Gali-29	DC-7	15.4	15.1	14.7	13.7	13.6	12.9	14.2	12.7	11.2	10.0	15	6.0	24.7	1.5	1.6	1.5	2.3	55	—	40	3.6	3.2	4.0	340	DF782	mz	1.19		
Gali-2	DC-8	16.2	15.8	14.8	13.7	12.7	13.2	15.1	12	12.9	11.0	15	4.6	27	1.6	2.5	1.6	2.6	55	225	40	3.5	3.0	4.1	101	DF782	mz	.99		
Gali-33	DC-4	19.3	18.7	17.5	16.3	15.5	15.8	—	16	13.4	11.4	13	3.9	28	1.6	2.0	1.2	1.3	55	265	40	4.3	3.8	4.8	110	DF782	mz	.99		
Gali-39	DC-7	20.8	21.1	19.7	17.7	17.0	16.1	17.6	17.7	10.5	9.0	13	4.9	22.9	1.6	1.8	1.5	2.3	55	—	35	3.5	3.1	3.9	350	DF782	mz	1.19		
Gali-3	DC-3	22.4	21.1	19.1	17.3	16.1	15.8	—	17.5	12.5	10.5	13	3.5	25	1.5	—	1.2	—	55	225	35	3.3	3.0	4.1	127	DF782	mz	.99		
Gali-S66	DC-22	22	20.3	17.3	15.5	—	—	—	15	2.8	1.0	13	2.7	18	1.25	—	1.7	—	50	200	16	3.5	3.0	4.0	136	DF782	mz	.99		

intermediate power, up to +15.9 dBm output

Gali-6F	DC-4	12.1	12.0	11.6	11.4	10.9	12.3	—	10	15.8	14.3	20	4.5	35.5	1.5	1.5	1.9	2.2	65	350	50	4.8	4.2	5.4	93	DF782	mz	1.29
Gali-4F	DC-4	14.3	14.0	13.4	13.0	12.3	13.2	—	11	15.3	13.8	20	4.0	32	1.2	1.2	1.5	1.8	65	325	50	4.4	4.0	5.0	93	DF782	mz	1.29
Gali-51F	DC-4	18.0	17.3	15.9	14.8	13.4	13.3	—	14	15.9	14.4	13	3.5	32	1.2	1.3	1.5	1.7	65	325	50	4.4	4.0	5.0	78	DF782	mz	1.29
Gali-5F	DC-4	20.4	19.3	17.4	16.0	14.8	15.1	—	15.5	15.7	14.2	13	3.5	31.5	1.2	1.2	1.4	1.4	65	325	50	4.3	3.9	4.9	103	DF782	mz	1.29
Gali-55	DC-4	21.9	20.6	18.5	17.0	15.5	15.7	—	17	15	13.5	13	3.3	28.5	1.25	1.35	1.3	1.5	65	350	50	4.3	3.8	4.8	100	DF782	mz	1.29
Gali-52	DC-2	22.9	20.8	17.8	15.9	14.4	—	—	16	15.5	13.5	13	2.7	32	1.35	—	1.4	—	65	350	50	4.4	4.0	4.8	85	DF782	mz	1.29

see suggested PCB layout PL-019 for Gali models

features

- In GaP HBT microwave amplifiers, except Gali-S66
- Gali-S66, advanced silicon technology
- miniature SOT-89 package
- frequency range, DC to 8 GHz, usable to 10 GHz
- up to 18.2 dBm typ. output power
- excellent package for heat dissipation, exposed metal bottom
- low thermal resistance for high reliability

model identification

Model	marking†	Model	marking†
Gali-1	01	Gali-5F	05F
Gali-19	19	Gali-55	55
Gali-21	21	Gali-52	52
Gali-29	29	Gali-4	04
Gali-2	02	Gali-49	49
Gali-33	33	Gali-5	05
Gali-3	03	Gali-51	51
Gali-39	39	Gali-59	59
Gali-6F	06F	Gali-6	06
Gali-4F	04F	Gali-S66	66
Gali-51F	51F	Gali-74	74

*Prefix letter (optional) designates assembly location.
 Suffix letters (optional) are for wafer identification.

absolute maximum ratings


operating temperature: -45°C to 85°C

storage temperature: -65°C to 150°C

NOTES:

- ◆ Aqueous washable
- † Specified at 5 GHz for Gali-19, -29, -39, -49, -59
- * at 1 GHz for Gali-4, 5, 51, 52, 6, 4F, 5F, 51F, 6F, 74; at 7 GHz Gali-19, -29, -39. For IP3, Gali-49, -59 at 1 GHz. Gali-74 at 0.1 GHz.
- ** f_u is the upper frequency limit for each model as shown in the table.
- VSWR for Gali-74 is for DC-1 GHz
- *** For Gali-74 @ 1GHz
- ⊛ Low frequency cutoff determined by external coupling capacitors.
- A. Environmental specifications and re-flow soldering information available in General Information Section.
- B. Units are non-hermetic unless otherwise noted. For details on case dimensions & finishes see "Case Styles & Outline Drawings".
- C. Prices and Specifications subject to change without notice.
- D. For Quality Control Procedures see Table of Contents, Section 0, "Mini-Circuits Guarantees Quality" article. For Environmental Specifications see Amplifier Selection Guide.
- 1. Model number designated by alphanumeric code marking.
- 2. Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.
- 3. Supply voltage must be connected to pin 3 through a bias resistor in order to prevent damage. See "Biasing MMIC Amplifiers" in minicircuits.com/application.html. Reliability predictions are applicable at specified current & normal operating conditions.
- 4. Thermal resistance θjc is from hottest junction in device to mounting surface leads.

prefix letter
 number
 suffix letter

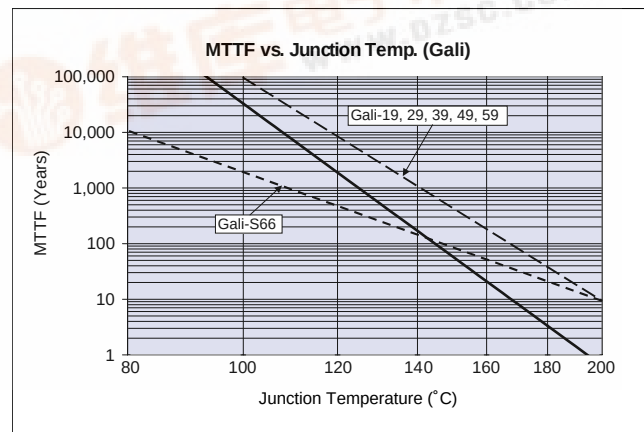

040521


Mini-Circuits®
INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Surface Mount



Gali


medium power, up to +18.3 dBm output

all specifications at 25°C

◆ MODEL NO.	FREQ. GHz	GAIN , dB Typical								MAXIMUM POWER (dBm) at 2 GHz*		DYNAMIC RANGE at 2 GHz*		VSWR (:1) Typ.		ABSO- LUTE MAX. RATING ²		DC OPERATING POWER ³ at Pin 3				THERMAL RESIS- TANCE ⁴		CASE STYLE		C O N N E C T I O N		PRICE \$			
		over frequency, GHz								Output (1 dB Comp.) Typ.		Input (no dmg) Min.		NF (dB) Typ.		IP3 (dBm) Typ.		In DC-3 GHz		Out 3-f _u ** GHz		I (mA) P (mW)		Current (mA) Device Volt. Min Max		θjc Typ. °C/W		Note B		Qty. (30)	
		0.1	1	2	3	4	6 [†]	7	Min. @ 2GHz***	Typ.	Min.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	
		f _i - f _u																													
Gali-6	DC-4	12.2	12.2	11.8	11.3	11.4	12.3	—	10	18.2	16.5	20	4.5	35.5	1.5	1.4	1.8	2.0	85	475	70	5.0	4.6	5.6	93	DF782	m2	1.49			
Gali-4	DC-4	14.4	14.1	13.5	12.9	12.5	13.1	—	11	17.5	16.0	20	4.0	34	1.2	1.2	1.4	1.7	85	475	65	4.6	4.2	5.5	93	DF782	m2	1.49			
Gali-49	DC-5	14.0	13.7	13.6	13.7	13.3	13.1	10.7	11.5	16.4	15.0	20	5.5	33.3	1.7	1.2	1.5	1.4	85	—	65	5.0	4.5	5.4	171	DF782	m2	1.79			
Gali-51	DC-4	18.1	17.5	16.1	14.7	13.7	13.4	—	14	18.0	16.5	13	3.5	35	1.3	1.2	1.5	1.7	85	475	65	4.5	4.2	5.5	78	DF782	m2	1.49			
Gali-5	DC-4	20.6	19.4	17.5	16.0	14.9	15.1	—	16	18.0	16.0	13	3.5	35	1.2	1.2	1.4	1.4	85	475	65	4.4	4.0	4.9	103	DF782	m2	1.49			
Gali-59	DC-5	20.6	19.7	18.3	16.7	15.4	14.0	10.2	16.3	17.6	16.5	13	4.3	33.3	1.6	1.5	1.5	1.7	85	—	65	4.8	4.3	5.2	209	DF782	m2	1.79			
Gali-74	DC-1	25.1	21.8	18.0	15.3	13.4	—	—	20	18.3	17.3	10	2.7	38	1.2	—	1.6	—	130	700	80	4.8	4.3	5.3	120	DF782	m2	2.35			

see suggested PCB layout PL-019 for Gali models

typical biasing configuration

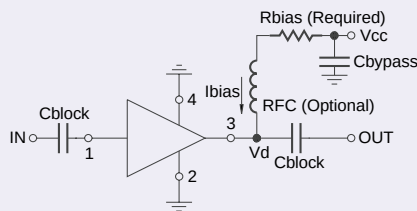

Test Board includes case, connectors, and components (in bold) soldered to PCB

R BIAS

"1%" Resistor Values (ohms) for Optimum Biasing of Gali Models

Vcc	Gali-1	Gali-19	Gali-2	Gali-21	Gali-3	Gali-33	Gali-4	Gali-5	Gali-51	Gali-52	Gali-55	Gali-6	Gali-4F	Gali-5F	Gali-51F	Gali-6F	Gali-566	Gali-49	Gali-59	Gali-74
			Gali-29	Gali-39																
7	90.9	88.7	88.7	88.7	107	69.8	38.3	40.2	40.2	51.1	52.3	30.1	51.1	52.3	52.3	49.9	187	34.0	36.5	28.7
8	113	113	113	113	133	93.1	52.3	53.6	53.6	69.8	71.5	43.2	69.8	71.5	71.5	69.8	243	48.7	51.1	41.2
9	137	137	137	137	162	115	66.5	68.1	68.1	88.7	90.9	56.2	90.9	90.9	90.9	88.7	301	64.9	64.9	53.6
10	162	162	162	162	191	140	80.6	82.5	82.5	110	110	69.8	110	110	110	110	374	80.6	80.6	66.5
11	187	187	187	187	221	165	95.3	97.6	97.6	130	130	84.5	130	130	130	127	432	95.3	97.6	78.7
12	215	215	215	210	249	191	110	113	113	150	150	97.6	150	150	150	147	499	110	113	90.9
13	237	237	237	237	280	215	127	127	127	169	169	113	169	169	169	165	562	127	127	102
14	261	261	261	261	309	243	143	143	143	191	191	127	191	191	191	187	619	143	143	115
15	287	287	287	287	340	267	158	158	158	210	215	140	210	210	210	205	681	158	158	127
16	309	309	316	316	365	287	174	174	174	232	232	154	232	232	232	226	750	174	174	—
17	332	332	340	340	392	316	187	191	191	261	249	169	249	249	249	249	806	187	191	—
18	357	357	365	365	422	340	205	205	205	280	274	182	274	274	274	267	866	205	205	—
19	383	383	392	392	453	365	221	221	221	301	287	196	294	294	294	287	931	221	221	—
20	412	412	412	412	475	392	237	237	237	316	309	210	316	316	316	309	976	237	237	—

designers kits available

pin connections

PORT	mz
RF IN	1
RF OUT	3
DC	3
GND EXT.	2,4
DEMO BOARD	Gali-TB*

*Gali-TBF for Gali-4F, -5F, -51F, -6F

KIT No.	No. of Units in KIT	Description	Price \$ per KIT
K1-Gali	90	Kit includes 1 test board plus 10 of each: Gali-1,21,2,33,3,6,4,51,5	99.95
K2-Gali	50	Kit includes 1 test board plus 10 of each: Gali-6F,4F,51F,5F,55	64.95

The Design Engineers Search Engine

Provides Actual Data Instantly

In Stock... Immediate Delivery

For Custom Versions Of Standard Models