


SBD Type : 21DQ04

FEATURES

- * Miniature Size
- * Low Forward Voltage Drop
- * Low Power Loss, High Efficiency
- * High Surge Capability
- * 30volts trough 100volts Types Available
- * 52mm Inside Tape Spacing Package Available

OUTLINE DRAWING

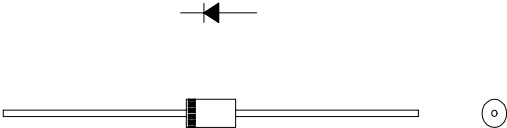

Maximum Ratings

Approx Net Weight:0.38g


Rating		Symbol	21DQ04			Unit
Repetitive Peak Reverse Voltage		V _{RRM}	40			V
Non-repetitive Peak Reverse Voltage		V _{RSM}	45			V
Average Rectified Output Current	Without Fin or P.C.Board	I _O	1.4	Ta=30℃	Half Sine Wave Resistive Load	A
	P.C.Board Mounted *		1.7	Ta=35℃		
RMS Forward Current		I _{F(RMS)}	2.67			A
Surge Forward Current		I _{FSM}	80	Half Sine Wave,1cycle,Non-repetitive		A
Operating JunctionTemperature Range		T _{jw}	- 40 to + 150			℃
Storage Temperature Range		T _{stg}	- 40 to + 150			℃

Electrical • Thermal Characteristics



Characteristics	Symbol	Conditions	Min	Typ	Max	Unit
Peak Reverse Current	I_{RM}	$T_j= 25^{\circ}C, V_{RM}= V_{RRM}$	-	-	1	mA
Peak Forward Voltage	V_{FM}	$T_j= 25^{\circ}C, I_{FM}= 2\ A$	-	-	0.55	V
Thermal Resistance(Junction to Ambient)	$R_{th(j-a)}$	Without Fin or P.C.Board	-	-	105	$^{\circ}C/W$
		P.C.Board mounted *			80	

* :Print Lands = 5x5 mm,Both Sides


21DQ04 OUTLINE DRAWING (Dimensions in mm)

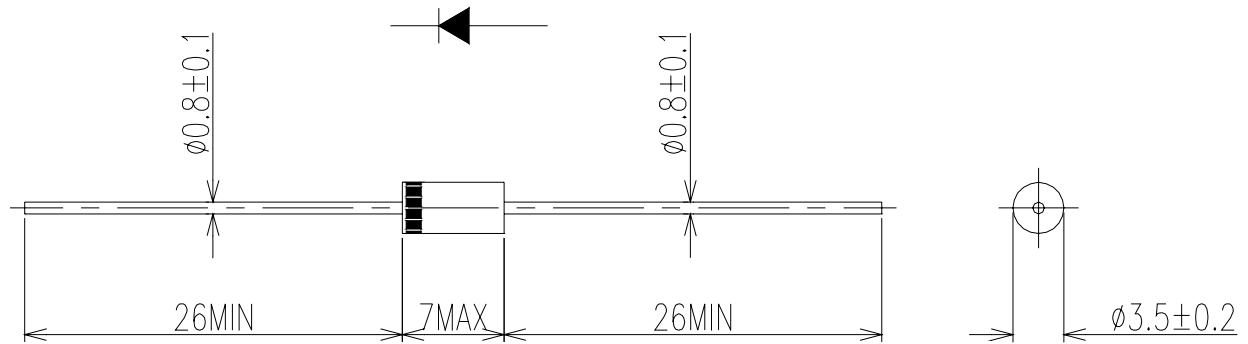

FORWARD CURRENT VS. VOLTAGE

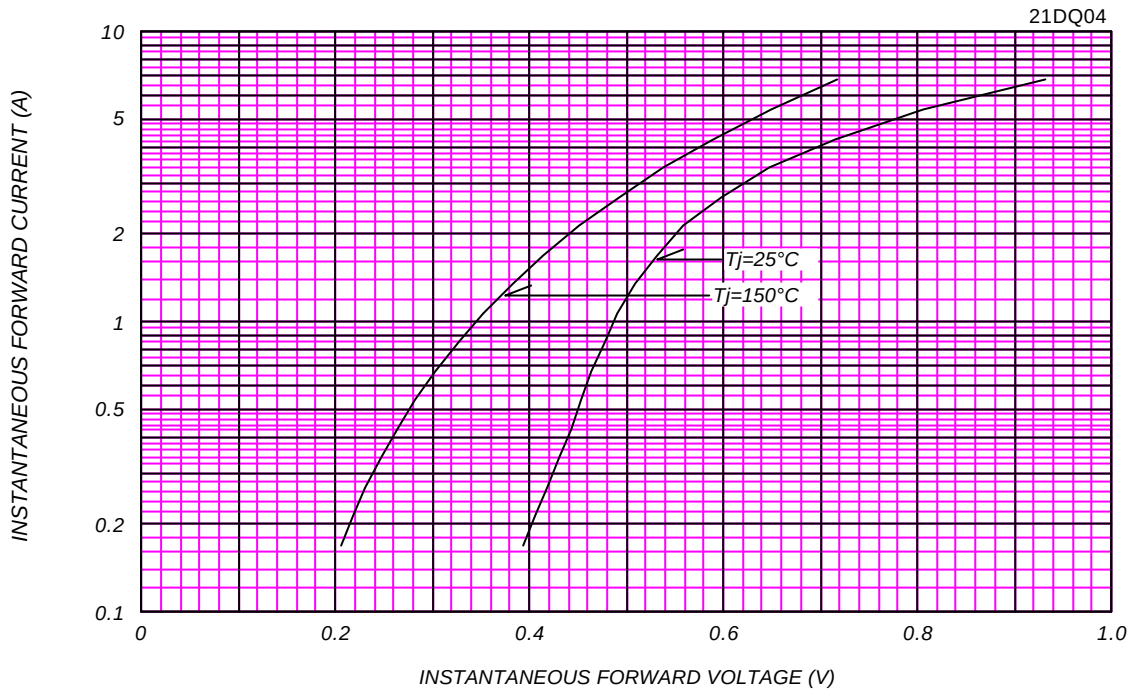


AVERAGE FORWARD POWER DISSIPATION

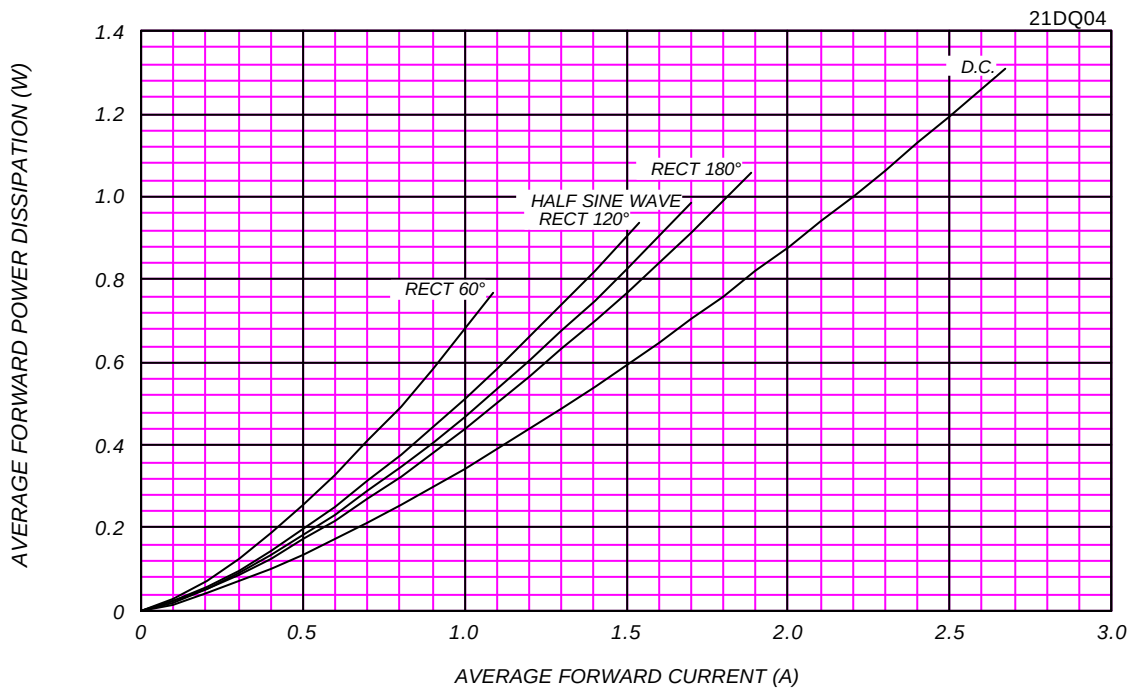

PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE


$T_j = 150^\circ\text{C}$


21DQ04

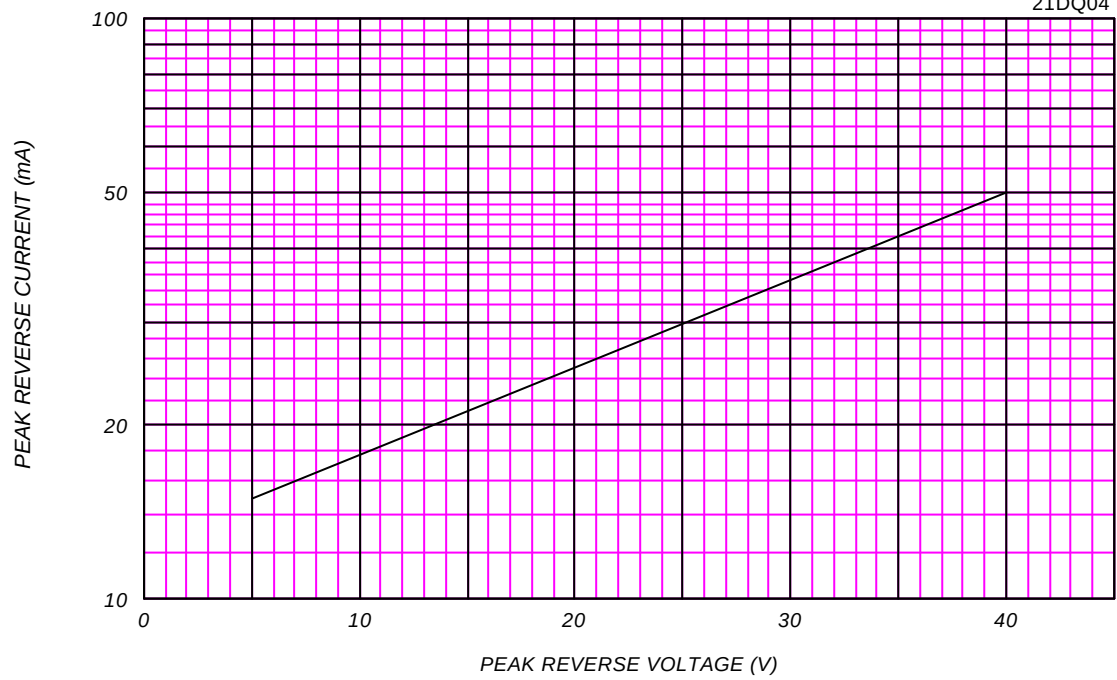

AVERAGE REVERSE POWER DISSIPATION



21DQ04

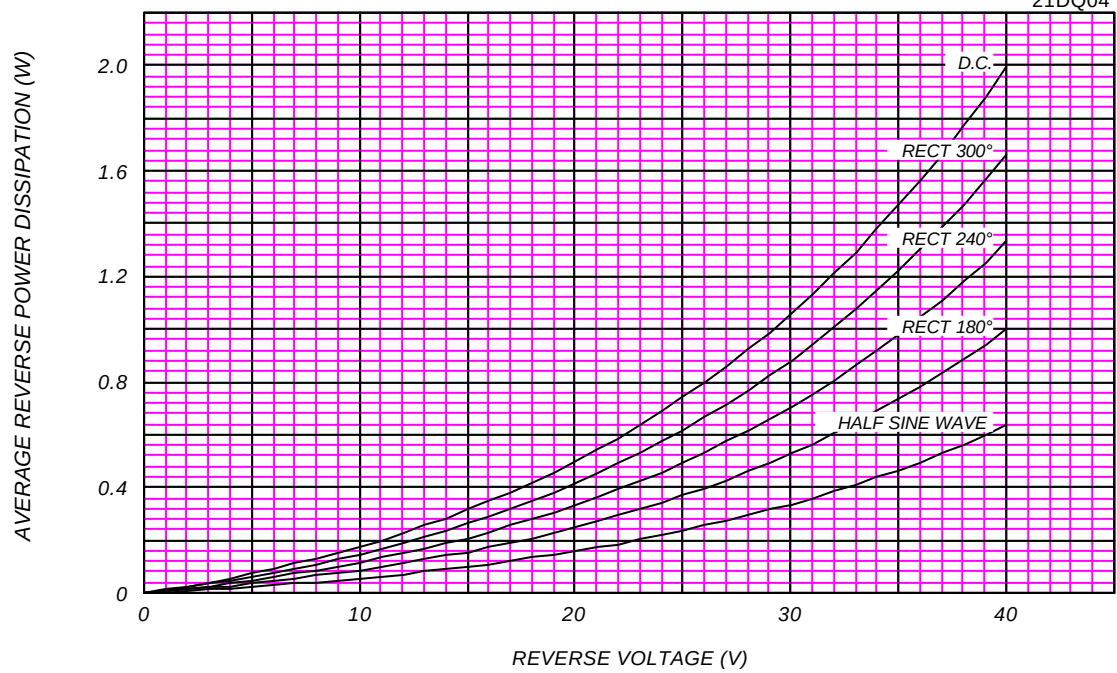




AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

Without Fin or P.C. Board, $V_{RM}=40V$

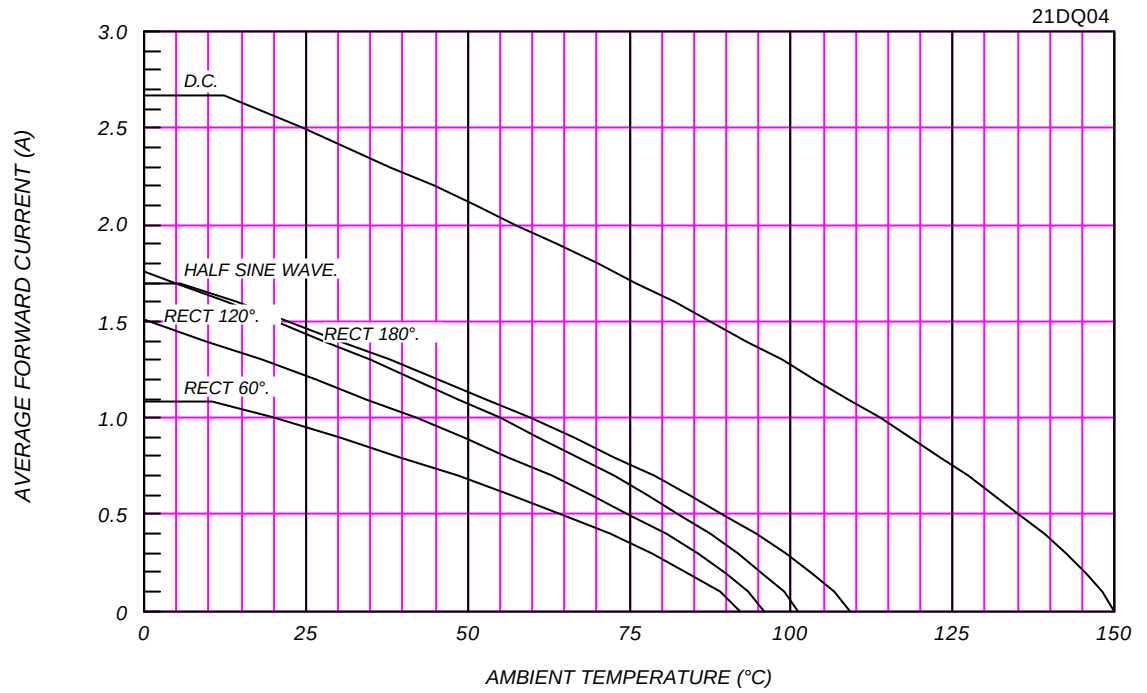

AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE


P.C. Board mounted (L=8mm, Print L and=10×10mm), $V_{RM}=40V$

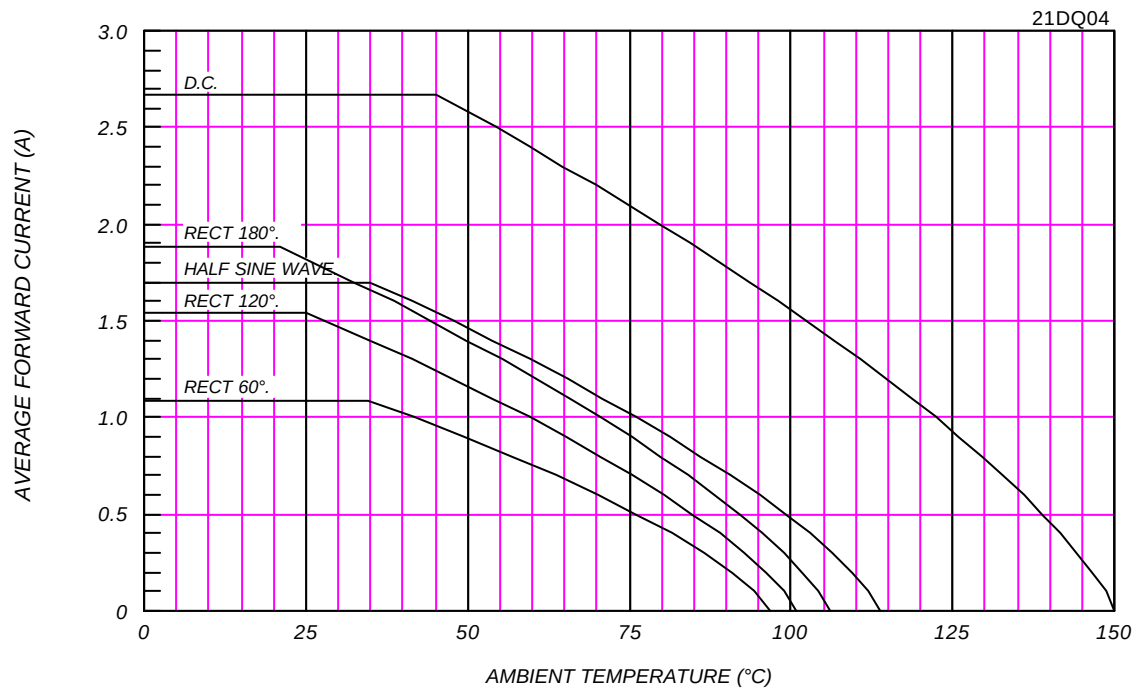

SURGE CURRENT RATINGS

f=50Hz,Half Sine Wave,Non-Repetitive,No Load

21DQ04

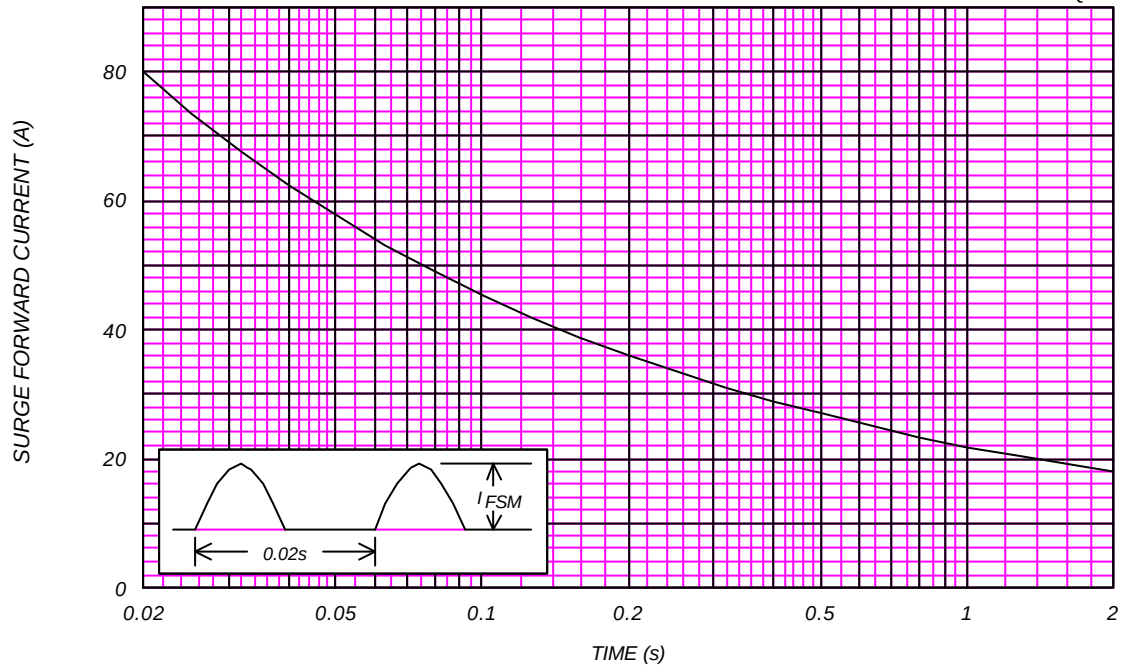

JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

T_j=25° C,V_m=20mV_{RMS},f=100kHz,Typical Value

21DQ04

