



# Phase-leg Rectifier Diode



## ISOPLUS220™

### Electrically Isolated Back Surface

$$V_{RRM} = 800/1200 \text{ V}$$

$$I_{F(AV)M} = 2 \times 11 \text{ A}$$

$V_{RSM}$ V	$V_{RRM}$ V	Type
900	800	DSP 8-08AC
1300	1200	DSP 8-12AC

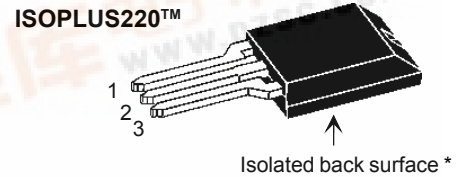

\* Patent pending

Symbol	Test Conditions	Maximum Ratings
$I_{FRMS}$	$T_{VJ} = T_{VJM}$	30 A
$I_{F(AV)M}$	$T_{case} = 100^{\circ}\text{C}$ ; 180° sine	2 x 11 A
$I_{FSM}$	$T_{VJ} = 45^{\circ}\text{C}$ ; t = 10 ms (50 Hz), sine	100 A
	t = 8.3 ms (60 Hz), sine	105 A
$I^2t$	$T_{VJ} = 150^{\circ}\text{C}$ ; t = 10 ms (50 Hz), sine	85 A
	t = 8.3 ms (60 Hz), sine	90 A
$I^2t$	$T_{VJ} = 45^{\circ}\text{C}$ ; t = 10 ms (50 Hz), sine	50 A <sup>2</sup> s
	t = 8.3 ms (60 Hz), sine	45 A <sup>2</sup> s
	$T_{VJ} = 150^{\circ}\text{C}$ ; t = 10 ms (50 Hz), sine	35 A <sup>2</sup> s
	t = 8.3 ms (60 Hz), sine	30 A <sup>2</sup> s
$T_{VJ}$		-40...+150 °C
$T_{VJM}$		150 °C
$T_{stg}$		-55...+150 °C
$T_L$	1.6 mm (0.063 in) from case for 10 s	260 °C
$V_{ISOL}$	50/60 Hz RMS; $I_{ISOL} \leq 1 \text{ mA}$	2500 V~
$F_C$	Mounting Force	11...65 / 2.5..15 N/lb
Weight		2 g

### Features

- Silicon chip on Direct-Copper-Bond substrate
- High power dissipation
- Isolated mounting surface
- 2500V electrical isolation
- For single and three phase bridge configuration
- Low cathode to tab capacitance (<15pF)
- Planar passivated chips
- Epoxy meets UL 94V-0

Symbol	Test Conditions	Characteristic Values
$I_R^{(1)}$	$V_R = V_{RRM}$ ; $T_{VJ} = 25^{\circ}\text{C}$	$\leq 10 \mu\text{A}$
	$T_{VJ} = 150^{\circ}\text{C}$	$\leq 0.7 \text{ mA}$
$V_F^{(2)}$	$I_F = 10 \text{ A}$ ; $T_{VJ} = 25^{\circ}\text{C}$	$\leq 1.22 \text{ V}$
	$T_{VJ} = 125^{\circ}\text{C}$	$\leq 1.26 \text{ V}$
$V_{TO}$	For power-loss calculations only	0.8 V
$r_T$	$T_{VJ} = T_{VJM}$	41 mΩ
$R_{thJC}$	DC current	1.8 K/W
$R_{thCK}$	DC current (with heatsink compound)	typ. 0.6 K/W
a	Maximum allowable acceleration	100 m/s <sup>2</sup>


Notes: Data given for  $T_{VJ} = 25^{\circ}\text{C}$  and per diode unless otherwise specified

① Pulse test: pulse Width = 5 ms, Duty Cycle < 2.0 %

② Pulse test: pulse Width = 300 μs, Duty Cycle < 2.0 %

IXYS reserves the right to change limits, test conditions and dimensions.

### ISOPLUS220 Outline

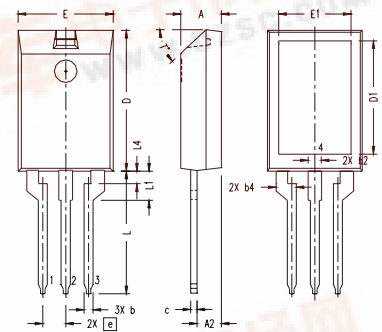

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.157	.197	4.00	5.00
A2	.098	.118	2.50	3.00
b	.035	.051	0.90	1.30
b2	.049	.065	1.25	1.65
b4	.093	.100	2.35	2.55
c	.028	.039	0.70	1.00
D	.591	.630	15.00	16.00
D1	.472	.512	12.00	13.00
E	.394	.433	10.00	11.00
E1	.295	.335	7.50	8.50
e	.100 BASIC		2.55 BASIC	
L	.512	.571	13.00	14.50
L1	.118	.138	3.00	3.50
L4	.039	.059	1.00	1.50
T*			42.5°	47.5°

