

Digital transistors (built-in resistors)

• Features



- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
- 2) The bias resistors consist of thinfilm resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- 3) Only the on/ off conditions need to be set for operation, making device design easy.

DTC114EKA
DTC114ECA

• Structure

PNP digital transistor (with built-in resistors)


•Equivalent circuit

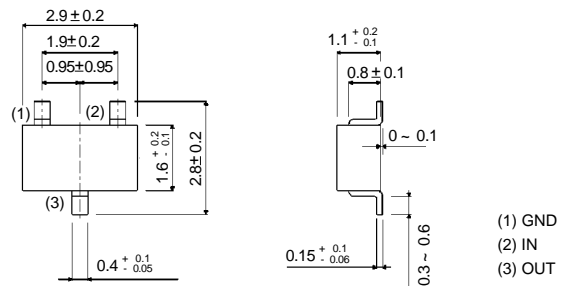

All terminals have same dimensions

DTA114EKA

EIAJ: SC—59

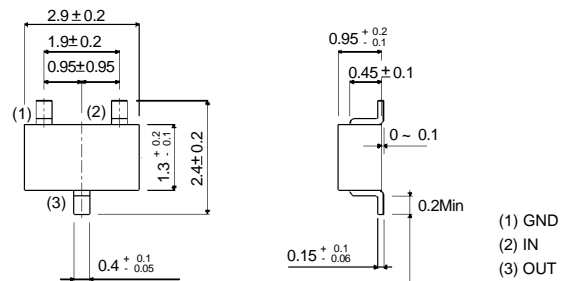

All terminals have same dimensions

DTA114ECA

EIAJ: SOT—23

• Absolute maximum ratings($T_a=25\text{ }^\circ\text{C}$)

Parameter	symbol	limits	unit
Supply voltage	V_{cc}	-50	V
Input voltage	V_{IN}	-10~+40	V
Output current	I_o	50	mA
	$I_{C(Max.)}$	100	
Power dissipation	P_d	200	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55~+150	$^\circ\text{C}$

DTC114EKA DTC114ECA

● Electrical characteristics($T_a=25^\circ\text{C}$)

Parameter	symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	—	—	0.5	V	$V_{CC}=5V, I_O=100\mu A$
	$V_{I(on)}$	3	—	—		$V_O=0.3V, I_O=10mA$
Output Voltage	$V_{O(on)}$	—	0.1	0.3	V	$I_O/I_I=10mA/0.5mA$
Input current	I_I	—	—	0.88	mA	$V_I=5V$
Output current	$I_{O(off)}$	—	—	0.5	μA	$V_{CC}=50V, V_I=0V$
DC current gain	G_I	30	—	—	—	$V_O=5V, I_O=5mA$
Input resistance	R_1	7	10	13	$K\Omega$	—
Resistance ratio	R_2/R_1	0.8	1	1.2	—	—
Transition frequency	f_T	—	250	—	MHz	$V_{CE}=10V, I_E=-5mA, f=100MHz^*$

*Transition frequency of the device

ELECTRICAL CHARACTERISTIC CURVES

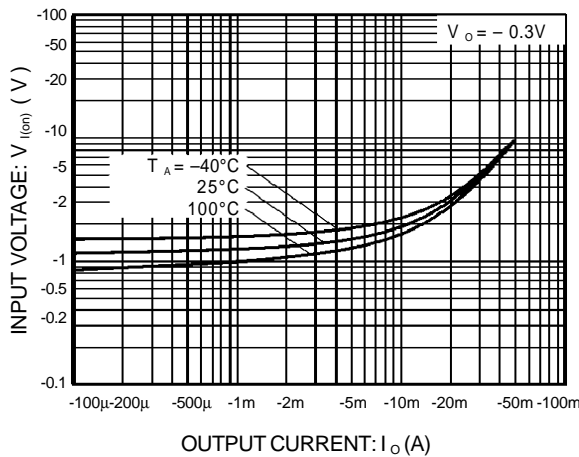


Figure 1. Input voltage vs.output current (ON characteristics)

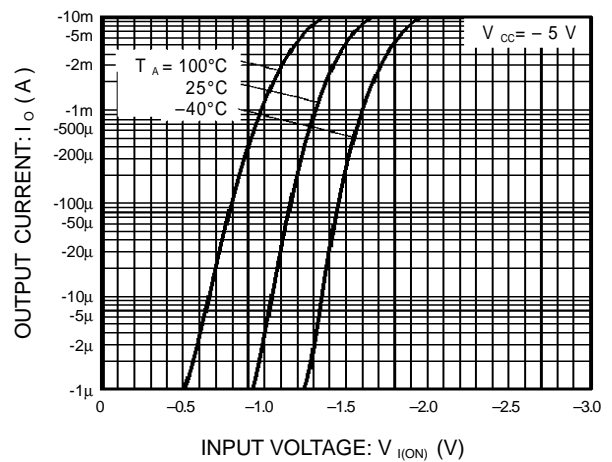


Figure 2. Output current vs.input voltage (OFF characteristics)

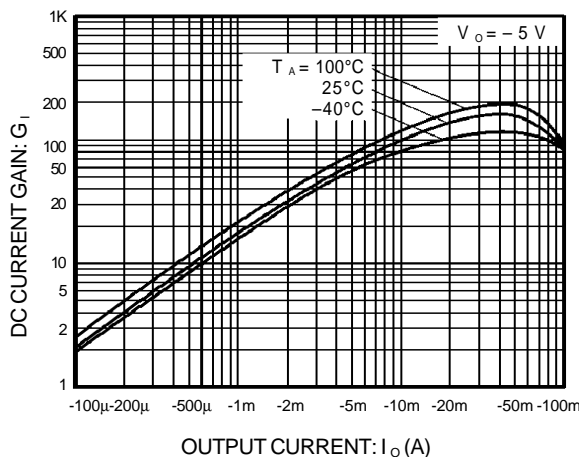


Figure 3. DC current gain vs.output current

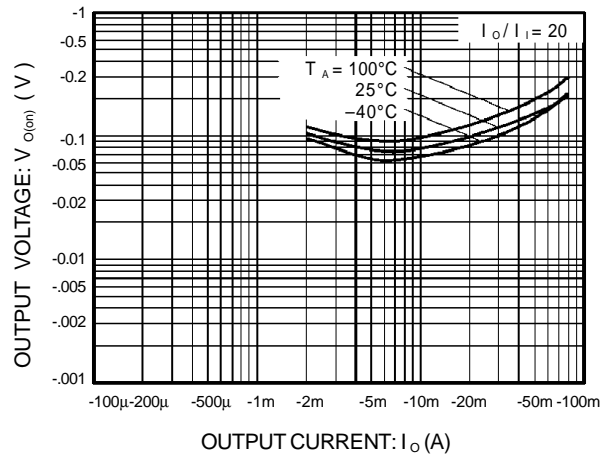


Figure 4. Output voltage vs.output current