





**Si4982DY**  
Vishay Siliconix

**Dual N-Channel 100-V (D-S) MOSFET**

**TrenchFET<sup>®</sup>**  
Power MOSFETs

| PRODUCT SUMMARY     |                                |                    |
|---------------------|--------------------------------|--------------------|
| V <sub>DS</sub> (V) | r <sub>DS(on)</sub> (Ω)        | I <sub>D</sub> (A) |
| 100                 | 0.150 @ V <sub>GS</sub> = 10 V | 2.6                |
|                     | 0.180 @ V <sub>GS</sub> = 6 V  | 2.4                |

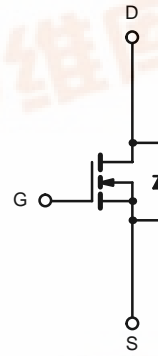

Ordering Information: Si4982DY  
Si4982DY-T1 (with Tape and Reel)

| ABSOLUTE MAXIMUM RATINGS (T <sub>A</sub> = 25 °C UNLESS OTHERWISE NOTED) |                                   |                        |      |
|--|-----------------------------------|------------------------|------|
| Parameter  | Symbol                            | Limit                  | Unit |
| Drain-Source Voltage   | V <sub>DS</sub>                   | 100                    | V    |
| Gate-Source Voltage  | V <sub>GS</sub>                   | ±20                    |      |
| Continuous Drain Current (T <sub>J</sub> = 150 °C) <sup>a</sup>          | I <sub>D</sub>                    | T <sub>A</sub> = 25 °C | 2.6  |
|  |                                   | T <sub>A</sub> = 70 °C | 2.1  |
| Pulsed Drain Current   | I <sub>DM</sub>                   | 20                     | A    |
| Continuous Source Current (Diode Conduction) <sup>a</sup>                | I <sub>S</sub>                    | 1.7                    |      |
| Maximum Power Dissipation <sup>a</sup>                                   | P <sub>D</sub>                    | T <sub>A</sub> = 25 °C | 2.0  |
|  |                                   | T <sub>A</sub> = 70 °C | 1.3  |
| Operating Junction and Storage Temperature Range                         | T <sub>J</sub> , T <sub>stg</sub> | -55 to 150             | °C   |

| THERMAL RESISTANCE RATINGS               |                   |       |      |
|--|-------------------|-------|------|
| Parameter                                | Symbol            | Limit | Unit |
| Maximum Junction-to-Ambient <sup>a</sup> | R <sub>thJA</sub> | 62.5  | °C/W |

Notes:  
a. Surface Mounted on FR4 Board, t ≤ 10 sec.

# Si4982DY

Vishay Siliconix









| SPECIFICATIONS (T <sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED) |                     |  |     |                  |       |      |
|--|---------------------|--|-----|------------------|-------|------|
| Parameter  | Symbol              | Test Condition   | Min | Typ <sup>a</sup> | Max   | Unit |
| <b>Static</b>  |                     |  |     |                  |       |      |
| Gate Threshold Voltage   | V <sub>GS(th)</sub> | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA  | 2   |                  |       | V    |
| Gate-Body Leakage  | I <sub>GSS</sub>    | V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±20 V   |     |                  | ±100  | nA   |
| Zero Gate Voltage Drain Current                                | I <sub>DSS</sub>    | V <sub>DS</sub> = 100 V, V <sub>GS</sub> = 0 V   |     |                  | 1     | μA   |
|  |                     | V <sub>DS</sub> = 100 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55 °C   |     |                  | 20    |      |
| On-State Drain Current <sup>b</sup>                            | I <sub>D(on)</sub>  | V <sub>DS</sub> = 5 V, V <sub>GS</sub> = 10 V  | 15  |                  |       | A    |
| Drain-Source On-State Resistance <sup>b</sup>                  | r <sub>DS(on)</sub> | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 2.6 A   |     | 0.130            | 0.150 | Ω    |
|  |                     | V <sub>GS</sub> = 6 V, I <sub>D</sub> = 2.4 A  |     | 0.140            | 0.180 |      |
| Forward Transconductance <sup>b</sup>                          | g <sub>fs</sub>     | V <sub>DS</sub> = 15 V, I <sub>D</sub> = 2.6 A   |     | 11               |       | S    |
| Diode Forward Voltage <sup>b</sup>                             | V <sub>SD</sub>     | I <sub>S</sub> = 1.7 A, V <sub>GS</sub> = 0 V  |     |                  | 1.2   | V    |
| <b>Dynamic<sup>a</sup></b>                                     |                     |  |     |                  |       |      |
| Total Gate Charge  | Q <sub>g</sub>      | V <sub>DS</sub> = 50 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 2.6 A   |     | 15               | 30    | nC   |
| Gate-Source Charge   | Q <sub>gs</sub>     |  |     | 2.7              |       |      |
| Gate-Drain Charge  | Q <sub>gd</sub>     |  |     | 4.0              |       |      |
| Gate Resistance  | R <sub>g</sub>      |  | 1   |                  | 4.4   | Ω    |
| Turn-On Delay Time   | t <sub>d(on)</sub>  | V <sub>DD</sub> = 50 V, R <sub>L</sub> = 50 Ω<br>I <sub>D</sub> ≅ 1 A, V <sub>GEN</sub> = 10 V, R <sub>G</sub> = 6 Ω |     | 10               | 20    | ns   |
| Rise Time  | t <sub>r</sub>      |  |     | 10               | 20    |      |
| Turn-Off Delay Time  | t <sub>d(off)</sub> |  |     | 30               | 60    |      |
| Fall Time  | t <sub>f</sub>      |  |     | 10               | 20    |      |
| Source-Drain Reverse Recovery Time                             | t <sub>rr</sub>     | I <sub>F</sub> = 1.7 A, di/dt = 100 A/μs   |     | 60               | 90    |      |

**Notes**

- a. For design aid only; not subject to production testing.
- b. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

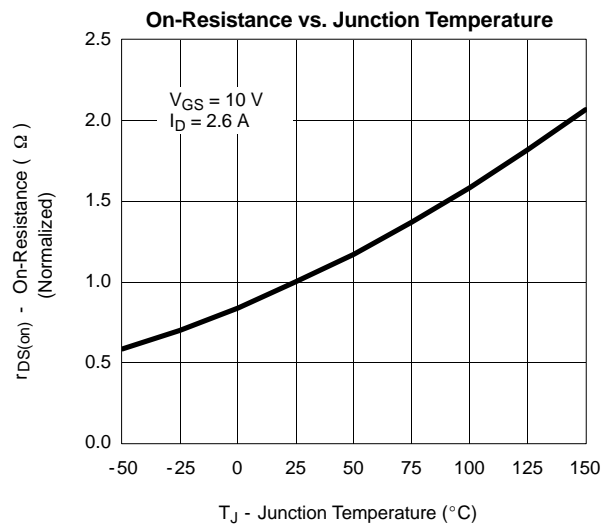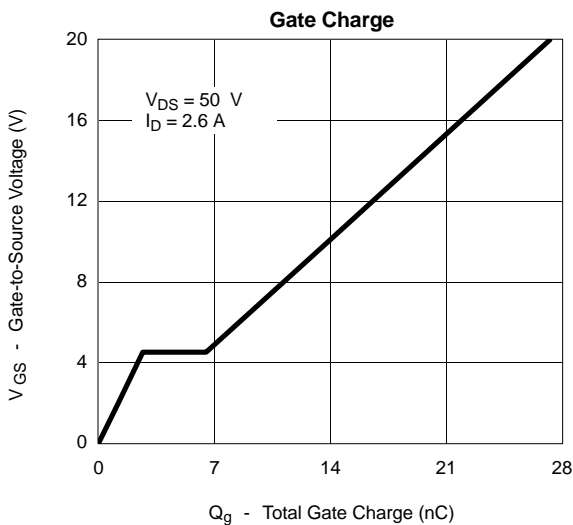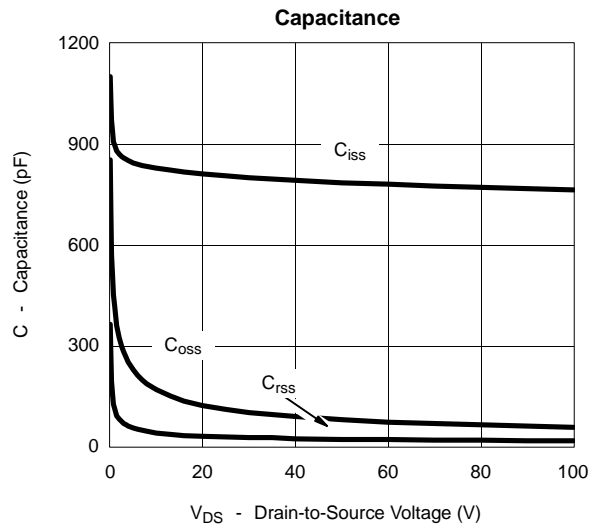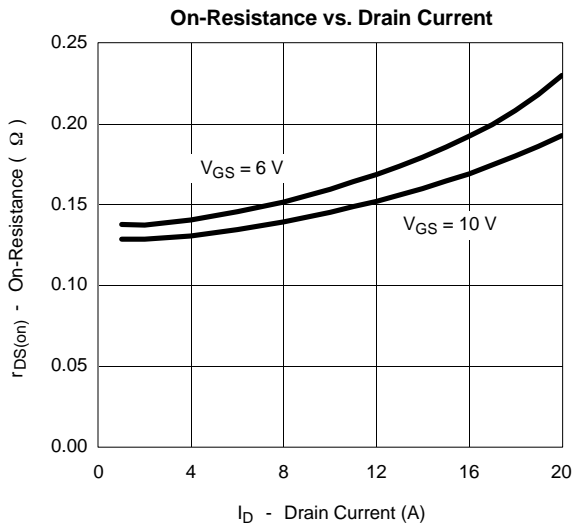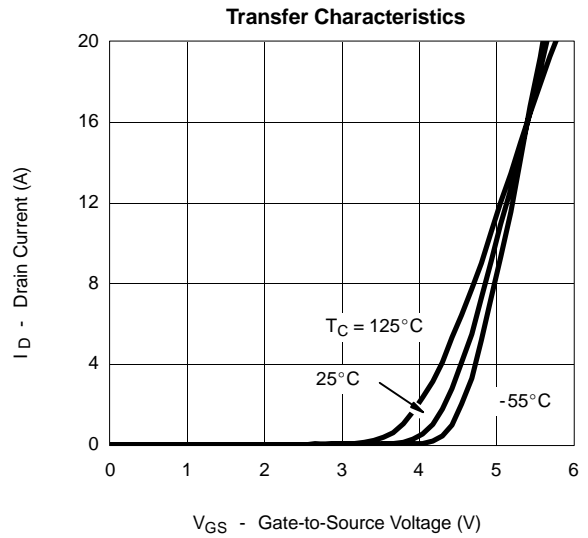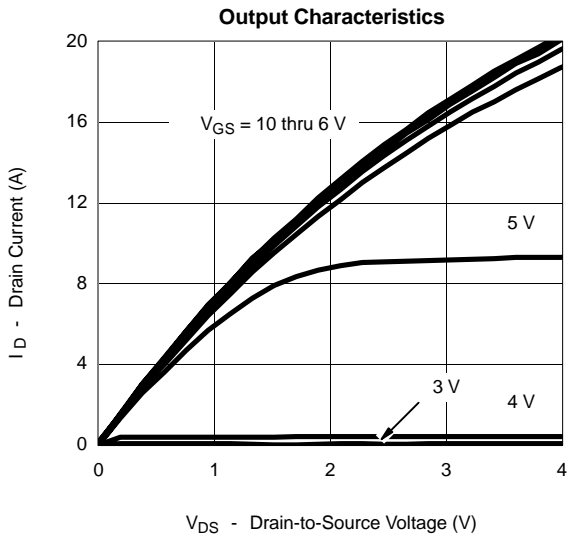



**TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)**

